



1. CLI QuickStart

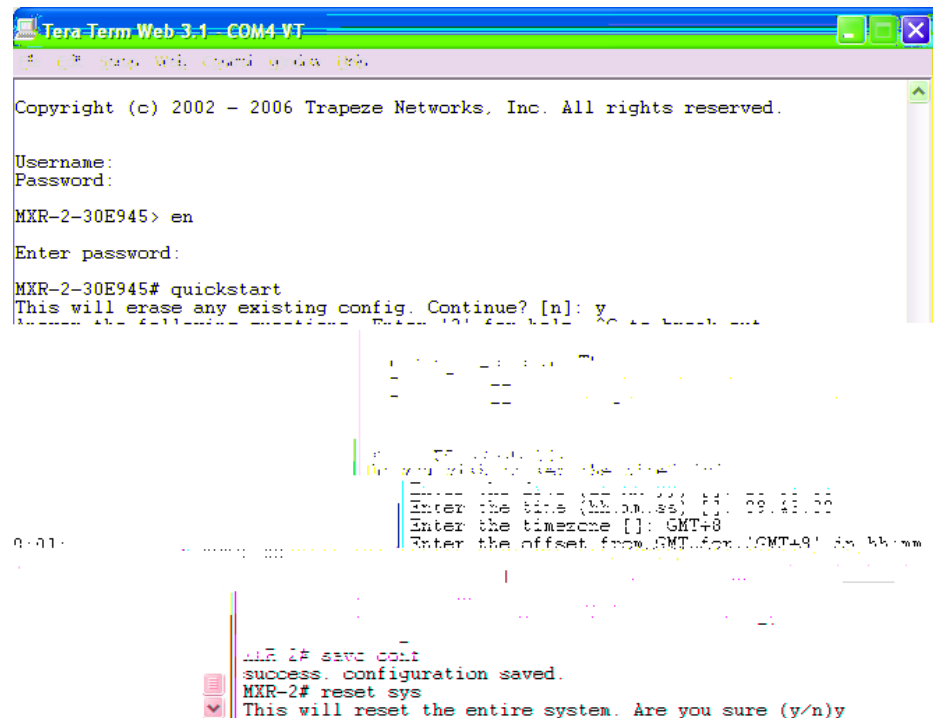

2. Launch RingMaster and input the evaluation license

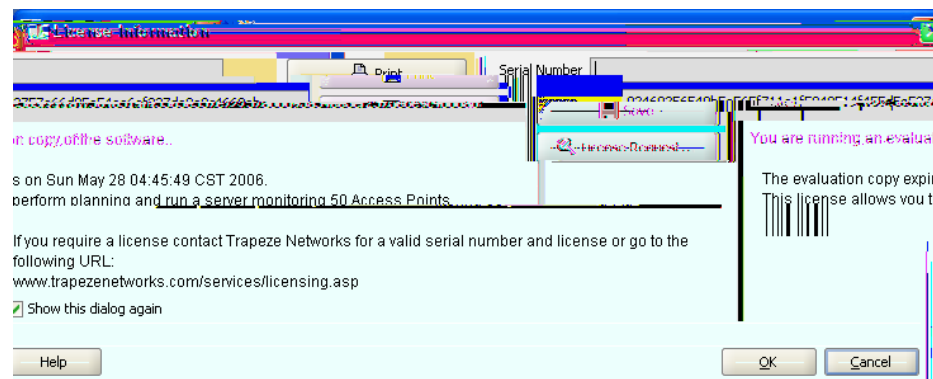

license 5 MP


license 50MP

2

license

3. Network Plan

CN




Upload MX

IP Address: 192.168.1.20



Enable Password: [REDACTED]


Updated [Enable Password] Value [044f19071f24564b]

< Previous **Next >** Finish Cancel

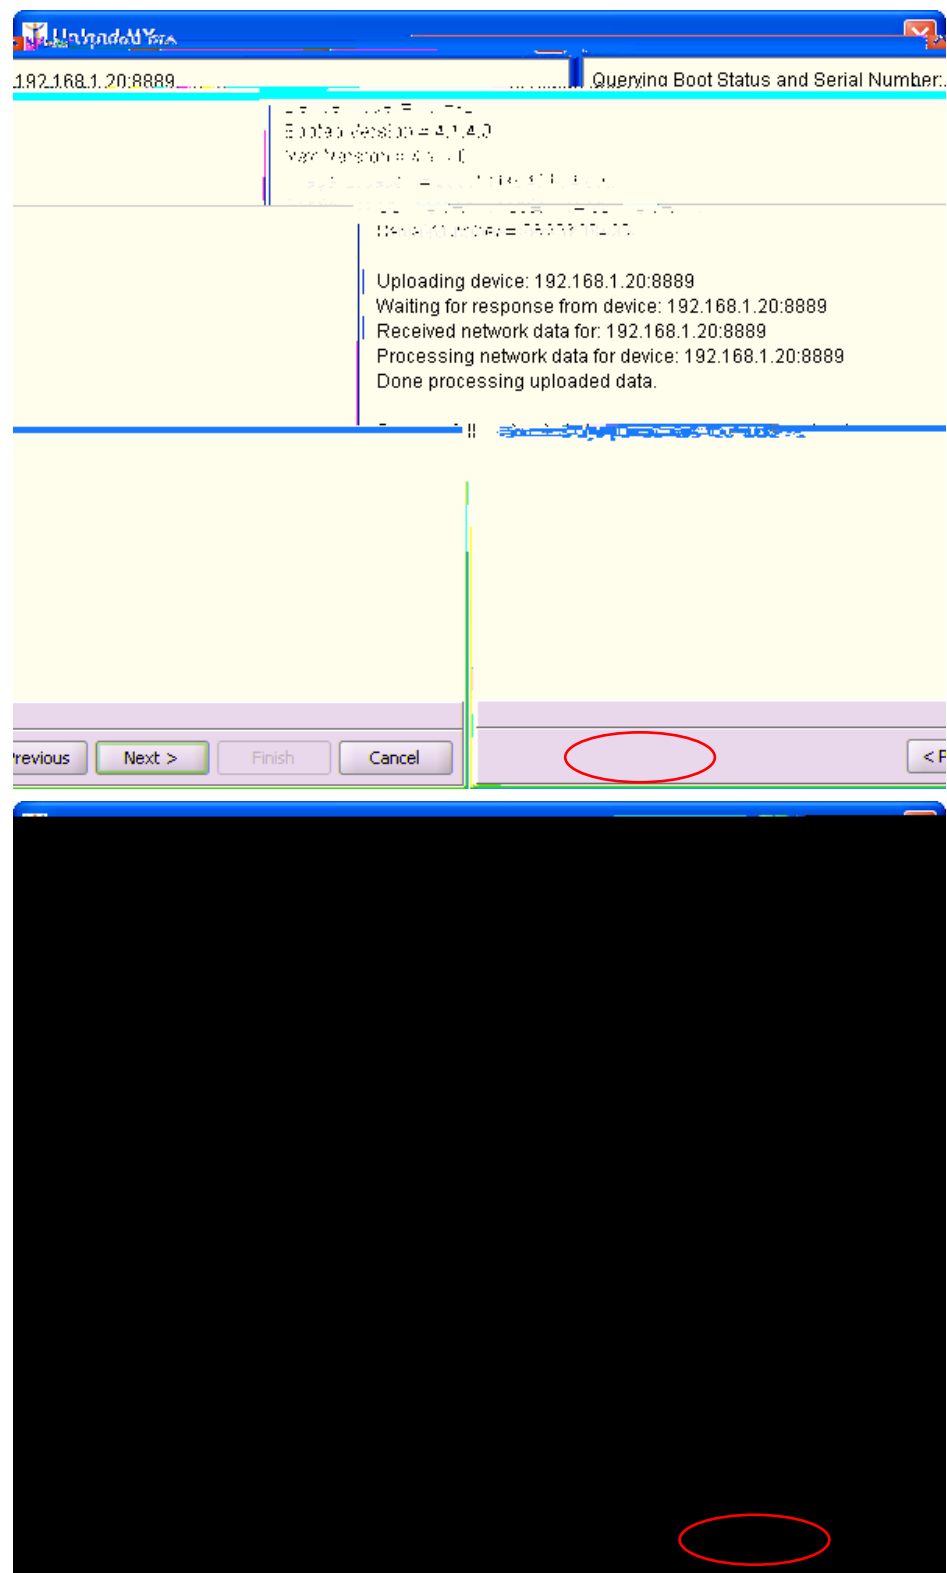


4. vlan

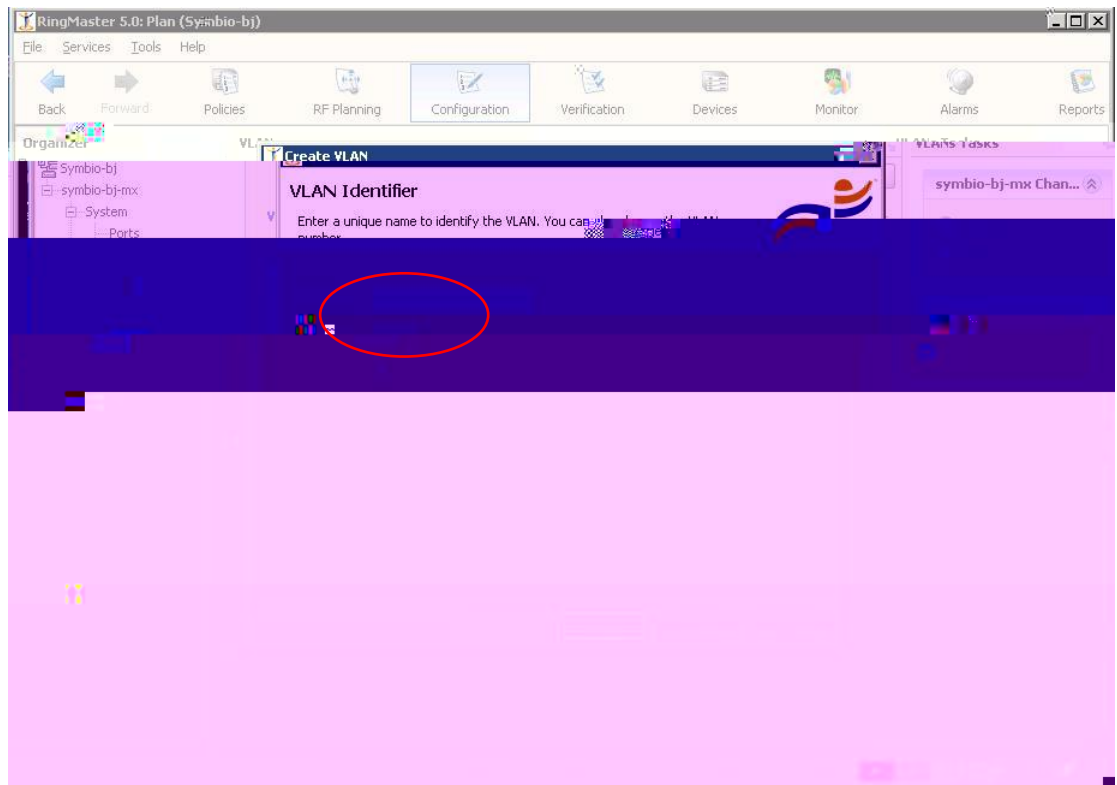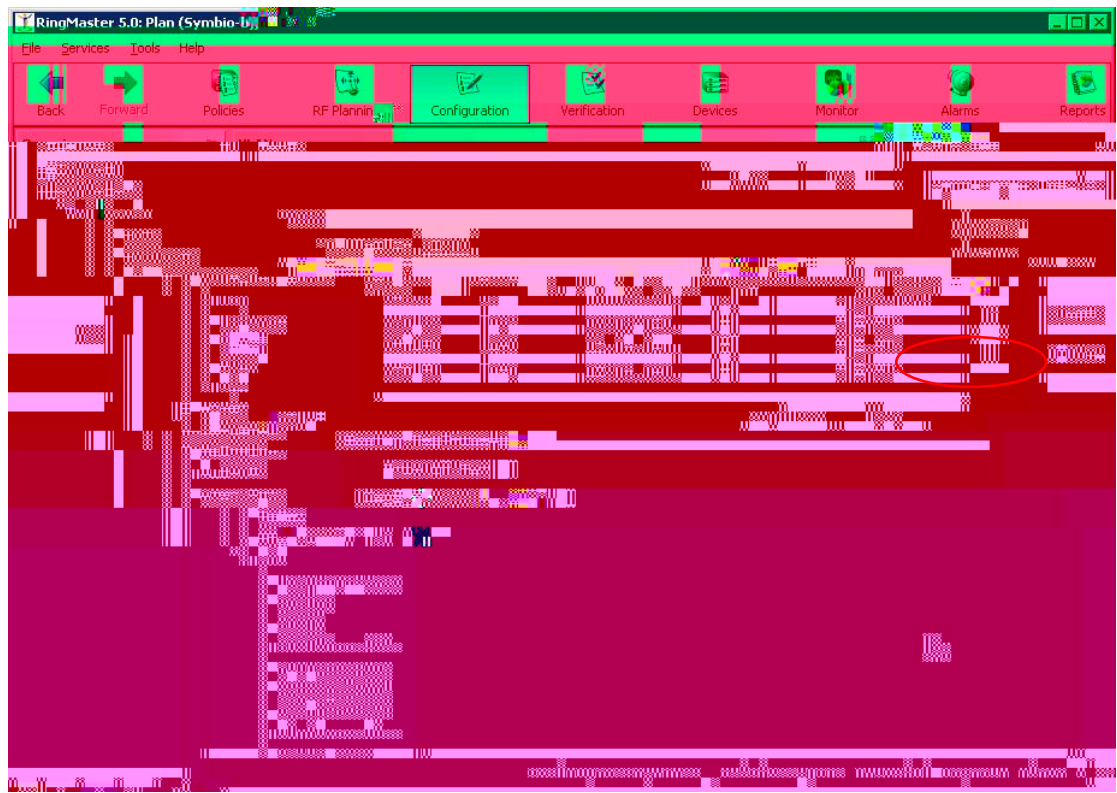


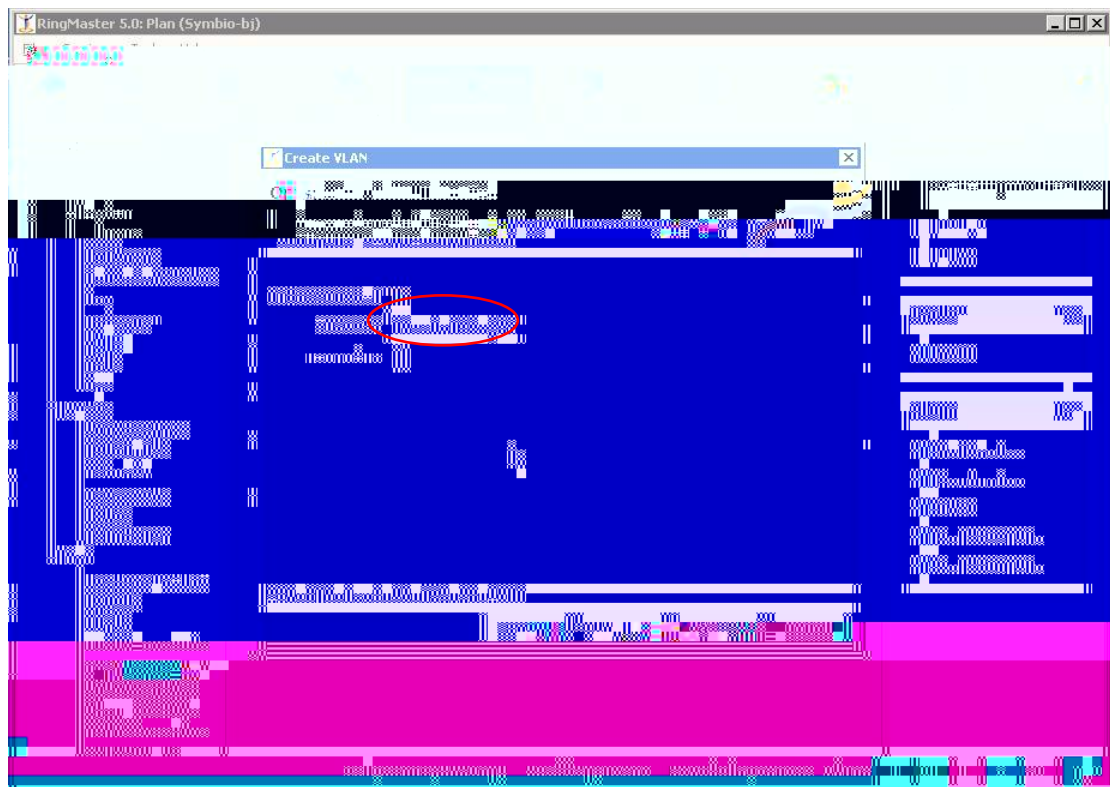


vlan ip addr

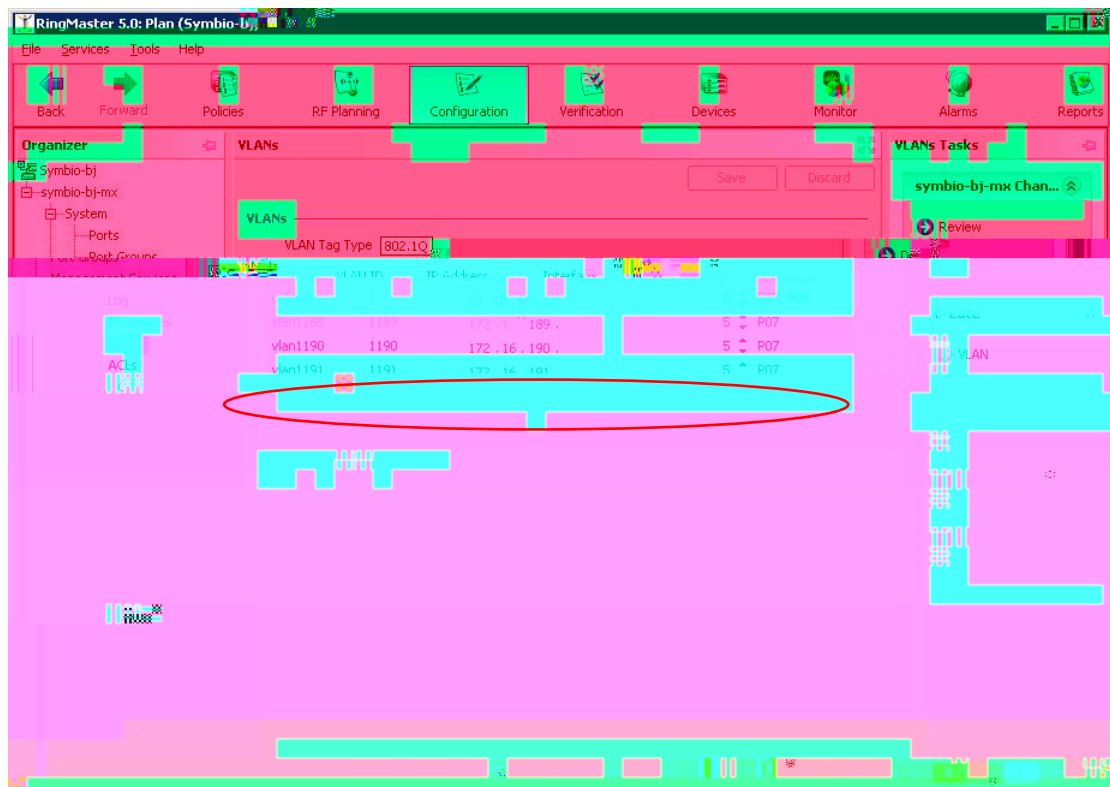


vlan

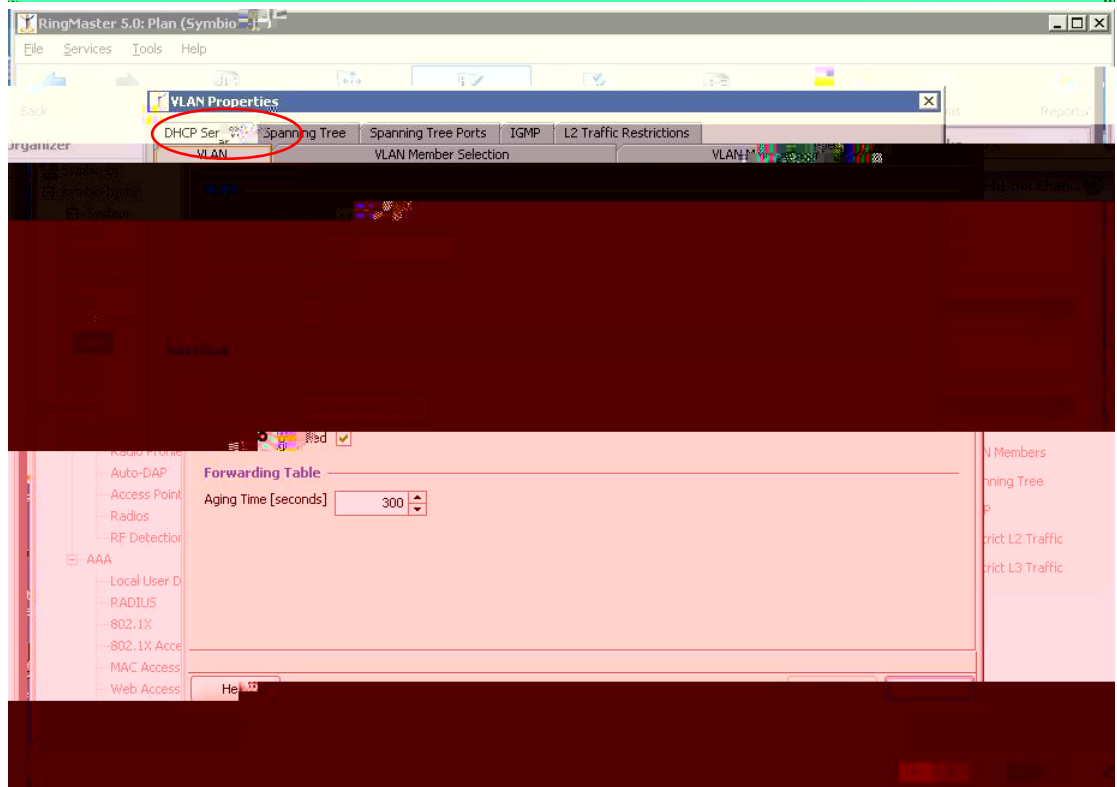

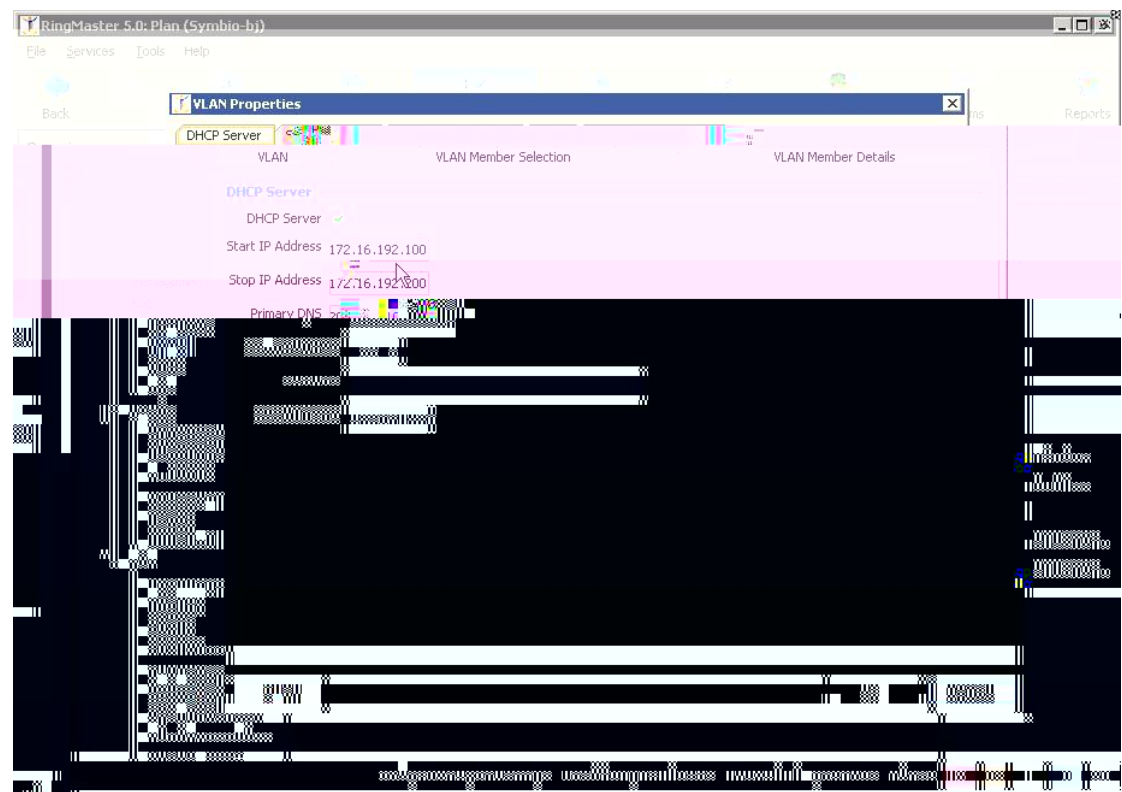


vlan dhcp

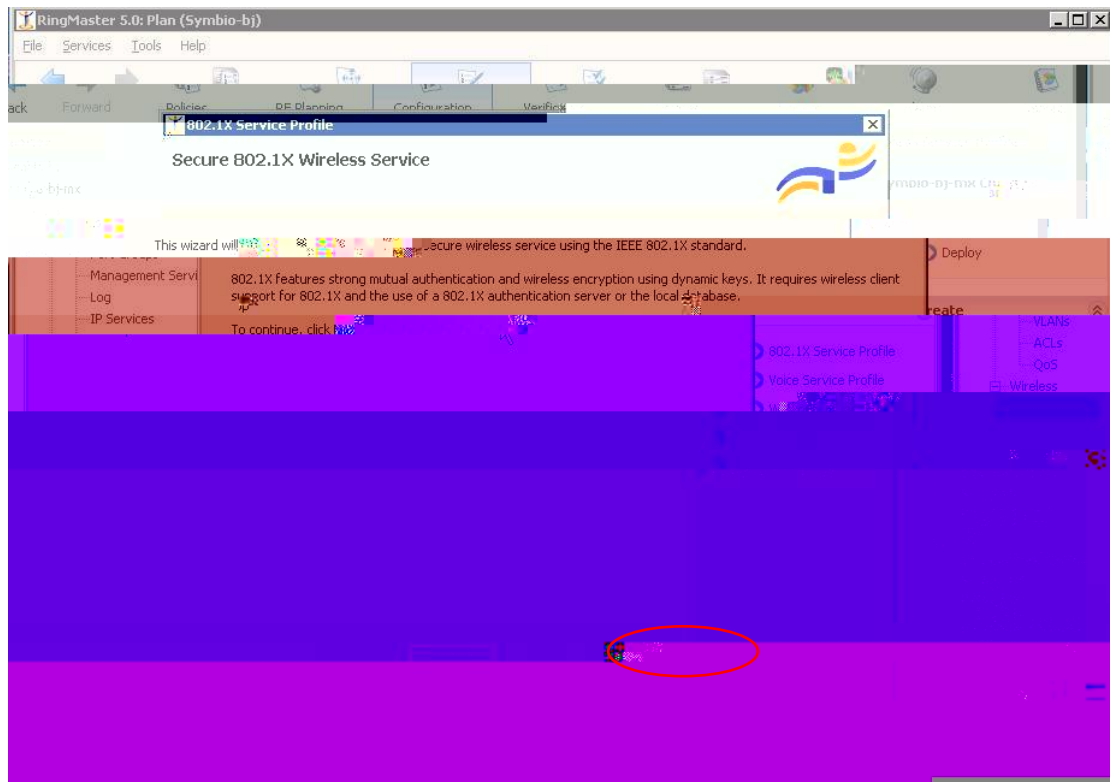

Service Profile



802.1X Service Profile

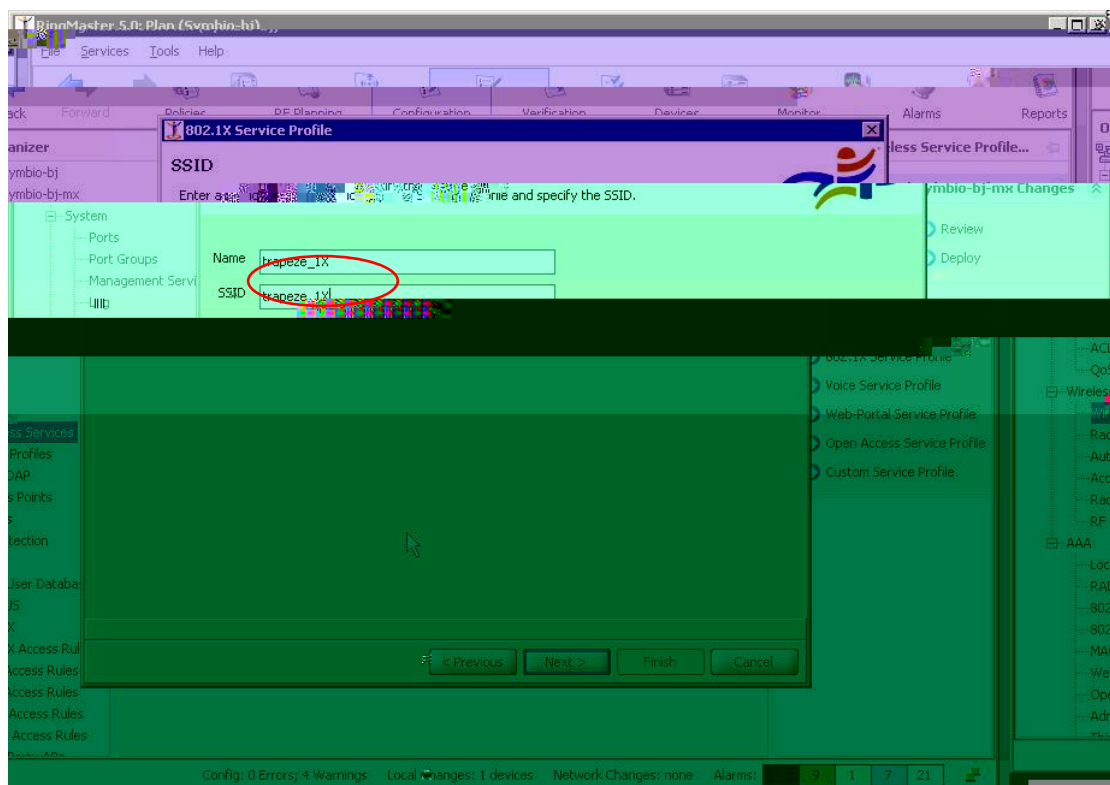


SSID


trapeze_1X


SSID

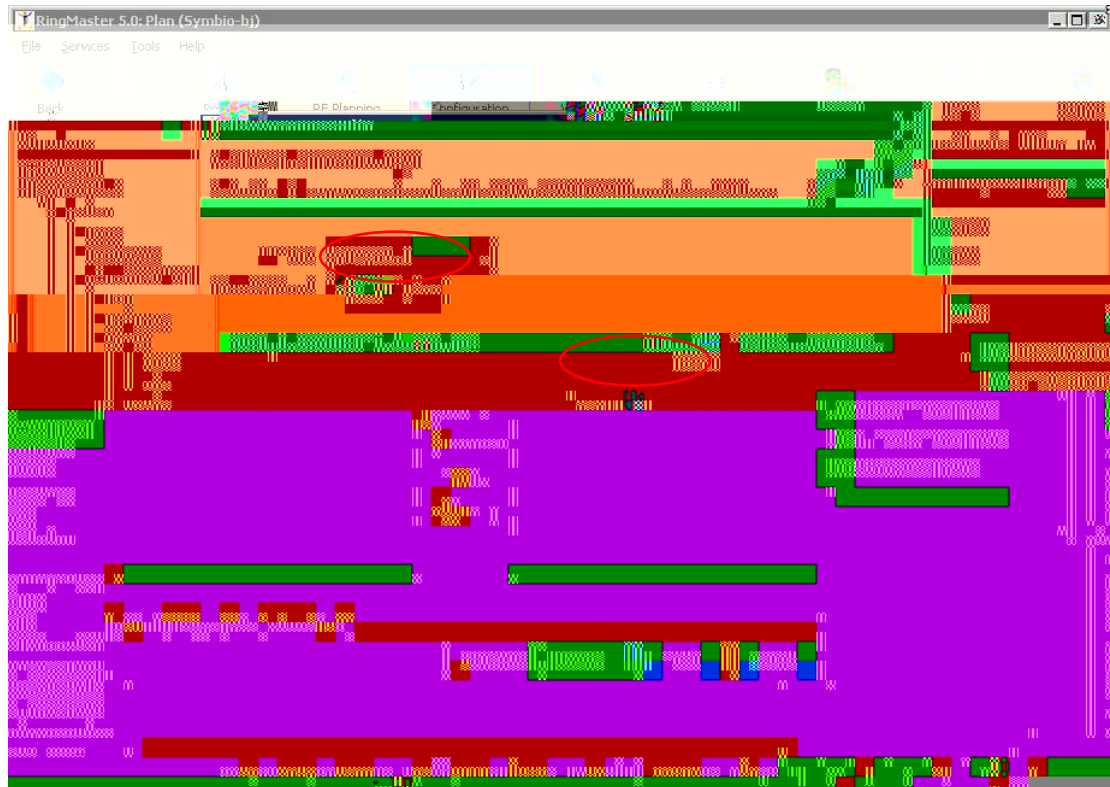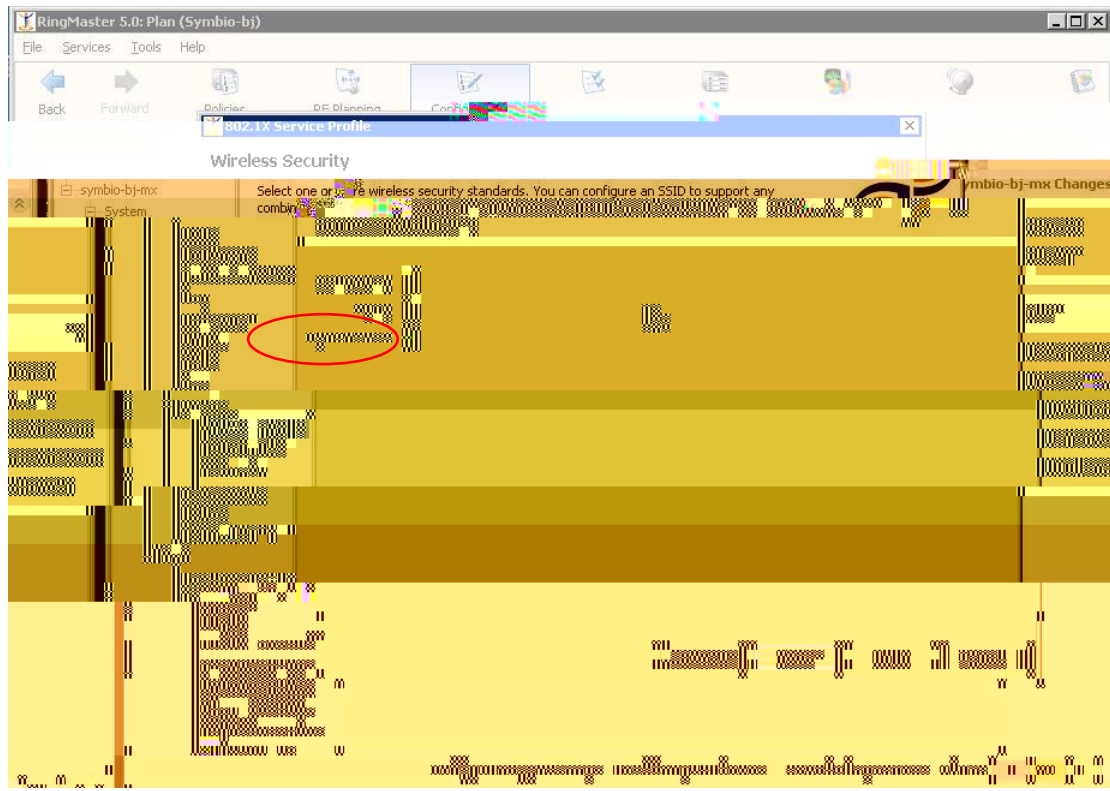

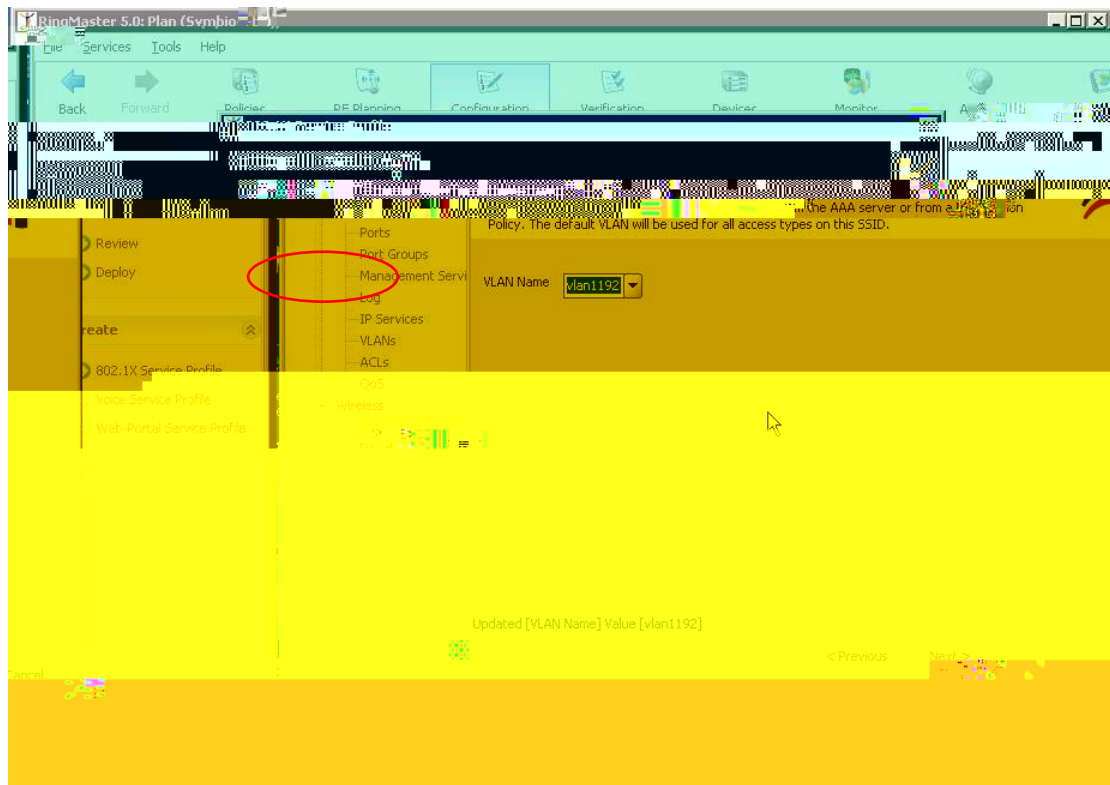



Service vlan name

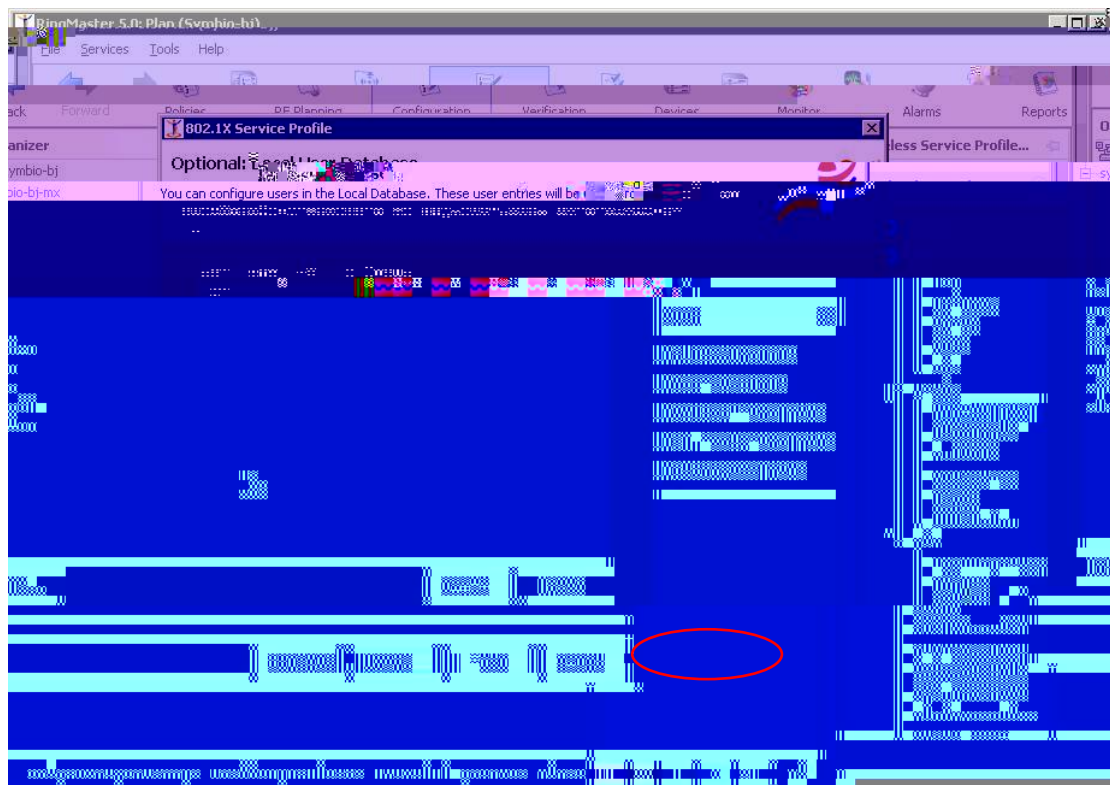

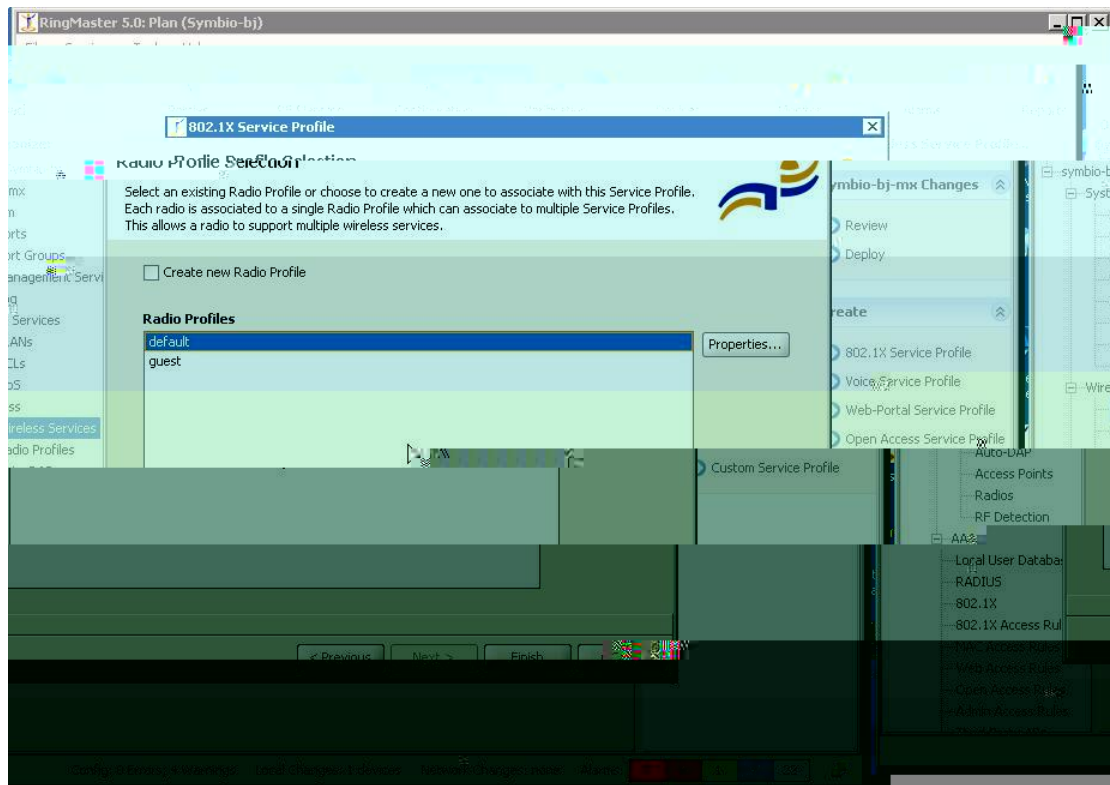


6. AP

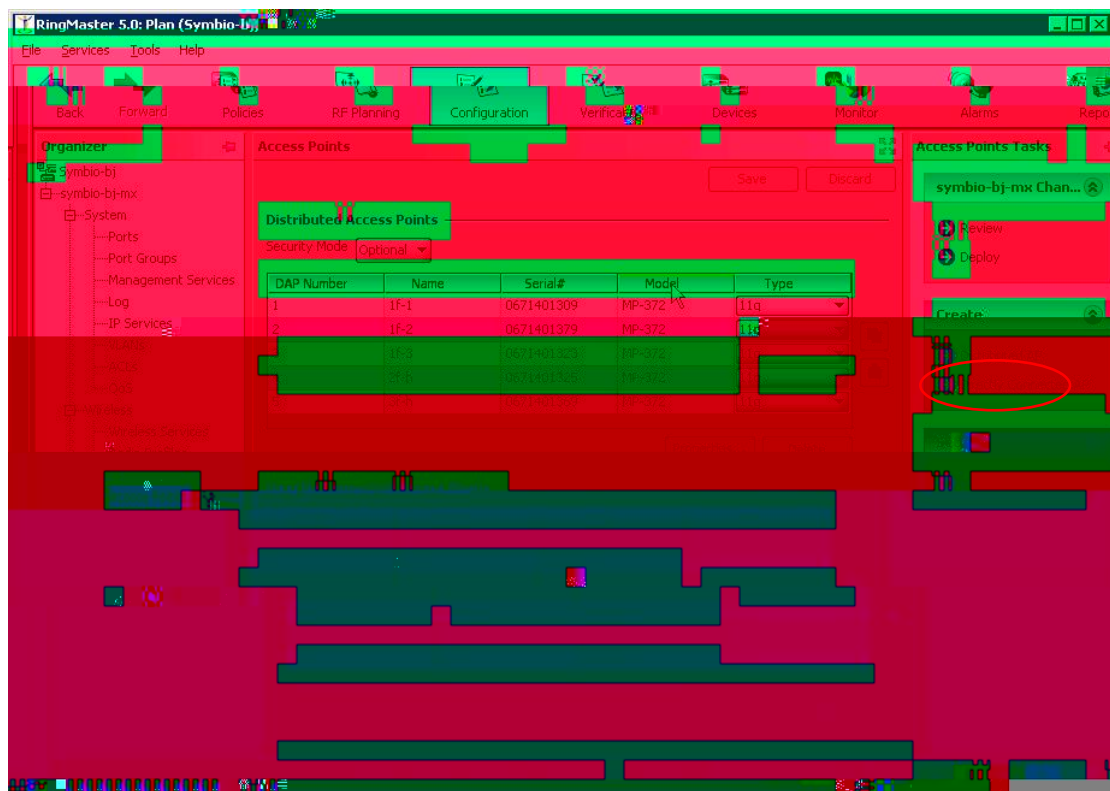


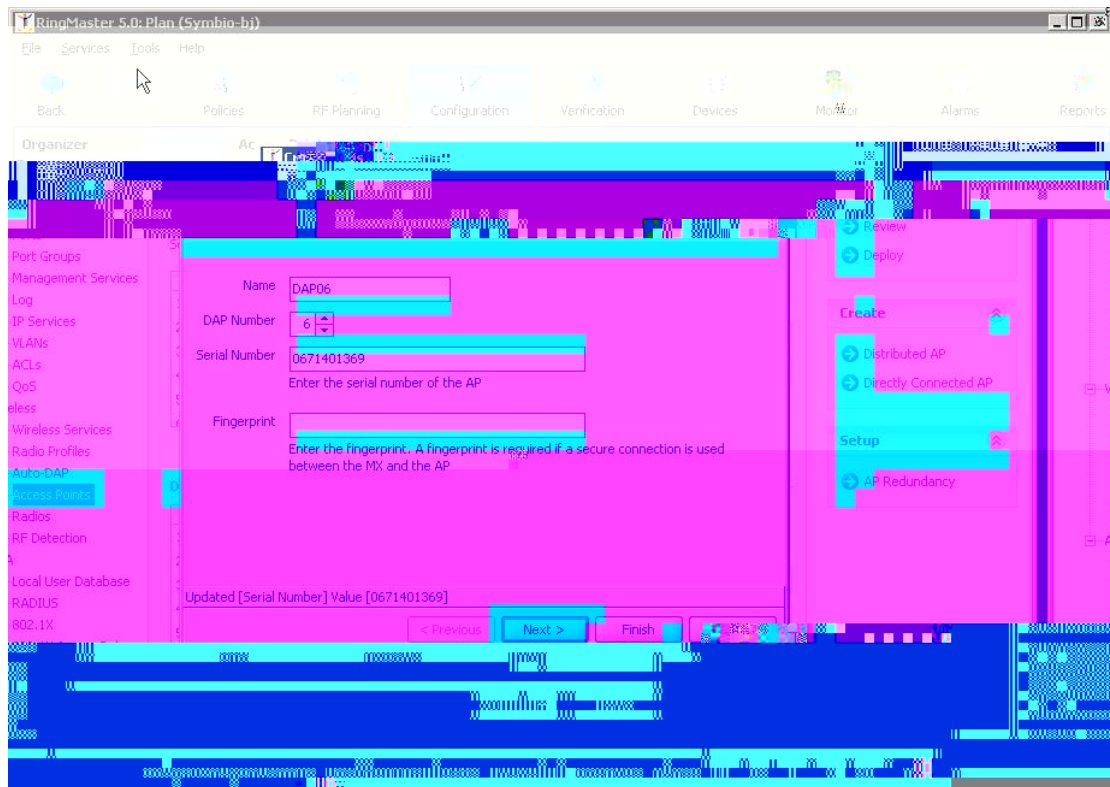


AP AP S/N

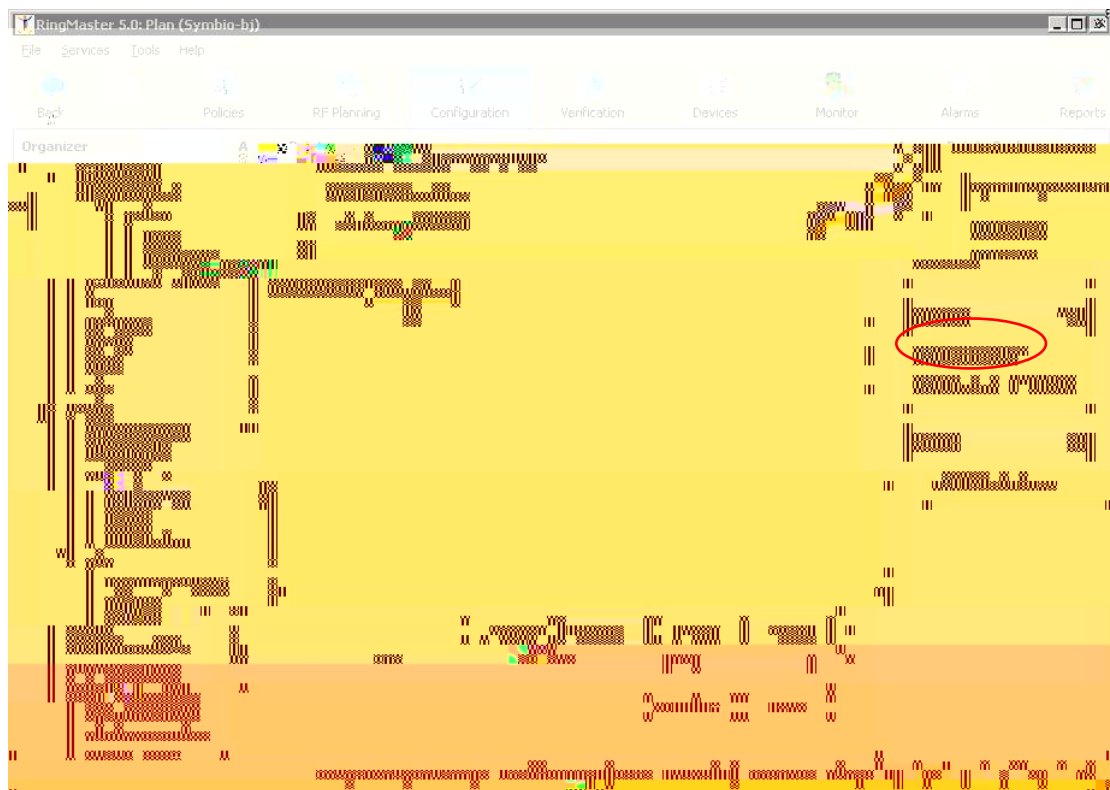


MX AP port

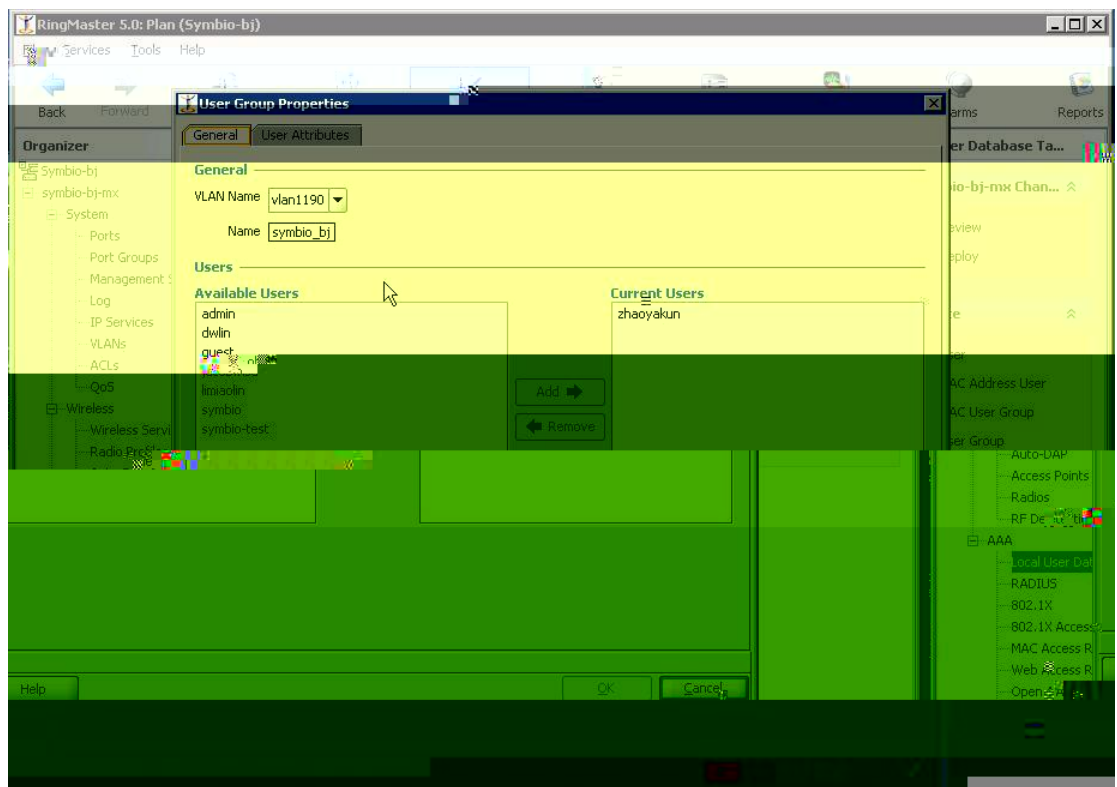

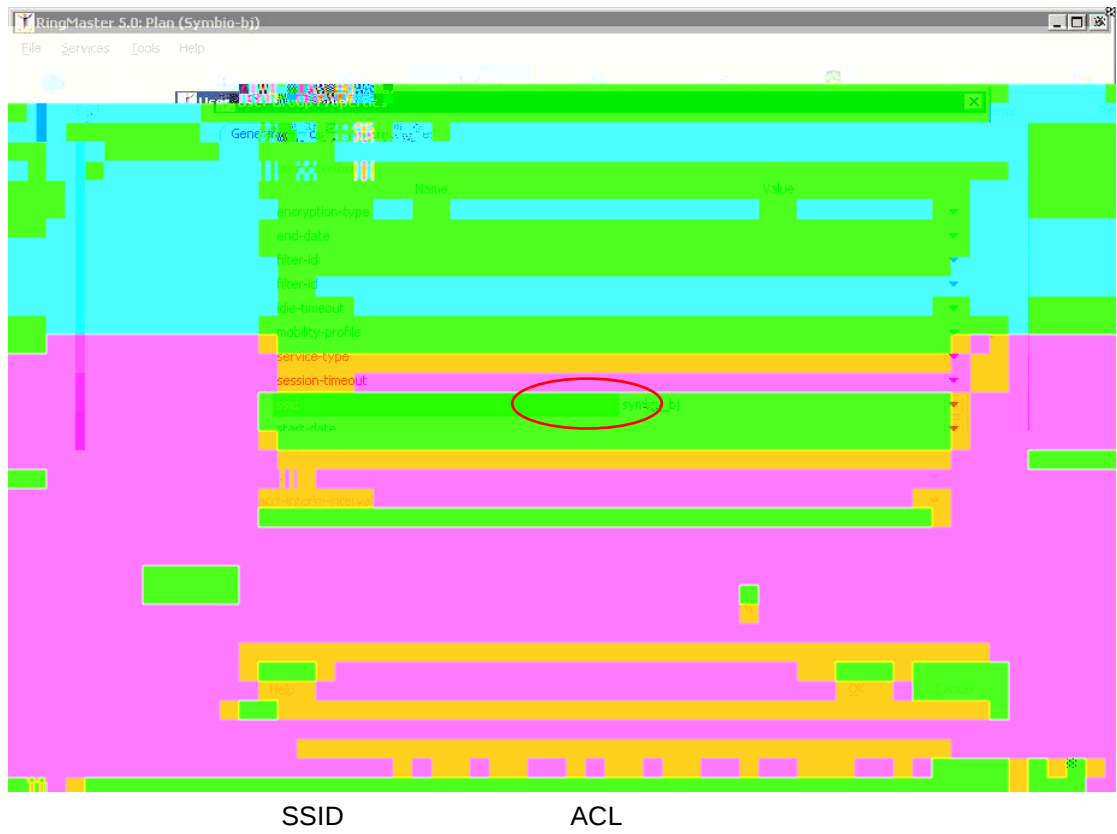

8.



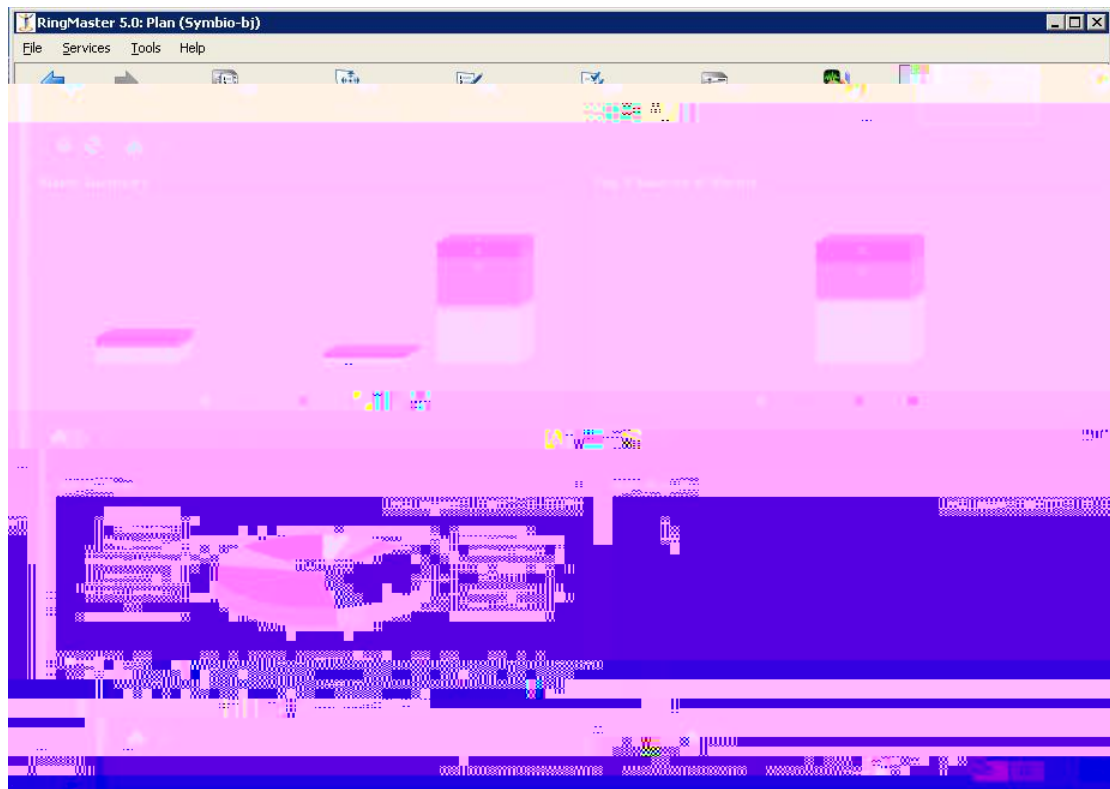

9. RF planning

