




RG-S1924GT






3.3		9
3.4		9
3.5	PC IP	10
3.6	SFP	11
3.7		11
3.7.1		11
4		13
5		14



V1.00

<http://www.i-net.com.cn>

<http://www.ruijie.com.cn>




service@star-net.cn

z

z

z 0591-83057001 0591-83057002

z 0591-83057315



1

RG-S1924GT

20 1000BASE-T 4


Combo


48Gigabits

1.1

- z Web
- z QoS VLAN Trunk
- z /
- z
- z /
- z -
- z LED
- z 19
- 19

1.2 RJ-45





—
—


2.5


—
—

2.6

2.6.1

—






2.6.5

2.7 EMI

2.8



3

3.1

z RG-S1924GT

z 4

z

z

z


z

z

z

z

CD



SYSTEM-Password APPLY

3.3

z

z

z

z

z

z

5

3.4

1

4


2

Power


:

3

PC




		PC	5	5e	
UTP	STP				100
RS-S1924GT			24	PC	
MDI/MDIX				PC	



3.6

SFP

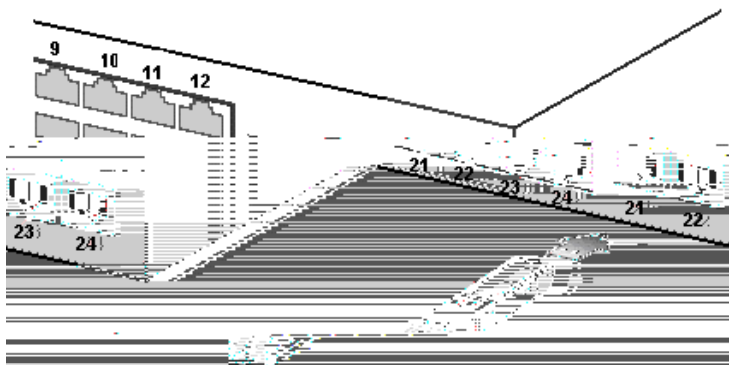

3-6

SFP


SFP

1

SFP

2

SFP



3-1		
9		PC 9 DTE
2 RXD()	2	3 TXD()
3 TXD()	3	2 RXD()
5 SGND		5 SGND

Z 9600bps
Z 8
Z
Z
Z 8
Z

4

1

Power

Z

Z

Z

2

LED

Z

Z

Z

5

100

Z

Z

5

[illegible]

RG-S1924GT		
	440	43 171.20 mm

