

RG-P-780

三

八

一

八

八

8


八




锐捷®




八



1. “ ”
- -
 -



1. 2. 3.

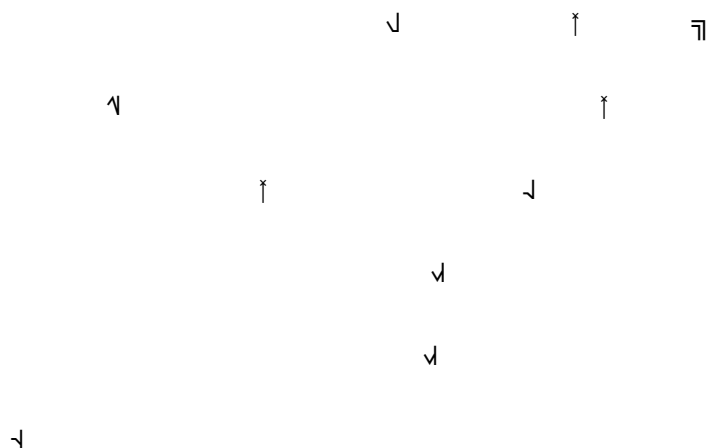

3. 4.

...

1. 2. 3.

 $\frac{2}{3} \text{ P}$

2.



3.



1

đ ÿ

Я

Тя

[illegible]



8




1.3

BSSID



1.4

- 扫描 (Scan)
 - 发现 (Discover)
 - 连接 (Connect)
 - 认证 (Authenticate)
- ~



2



Ω ° κ | ò ! ő ª g ō Ы
Œ Т І ж ѿ d ¢

2.1 FCC

✓ ? !

[illegible]

-
-
-
-



CHIEF972

‡

√

√

√



1

†

§

‡

~

ı

ı

ó

ı

g

ó

ı

ı

2.2 IC

√

8

•

•

√

ı

†

√

√

√

ı

√

ıı

√

√

√

√


√

ıı

√

3

3.1 AP + Bridge

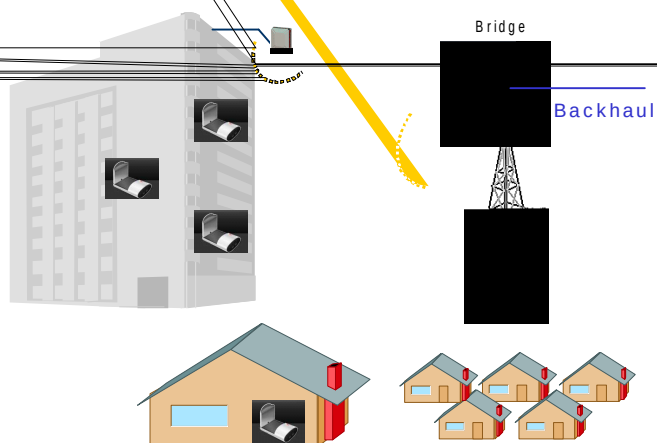

3.2 AP + AP




t e

3.3 Bridge+ Bridge

u

7

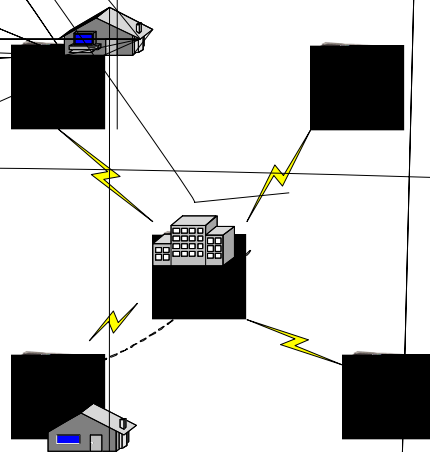


4.1

😊	! ε ã	ñ	”O 6 ”Q	ı , ’	ñ	ı	ı	”HD	¢
😐	ε	ã~ ħ	¢	ă ı 6	¢	ħ ↘ \$	ă ı	¢	
	6	”ı	ı	ı	¢	ħ ↘ \$	6	”ı	ı



4.2

4.2.1

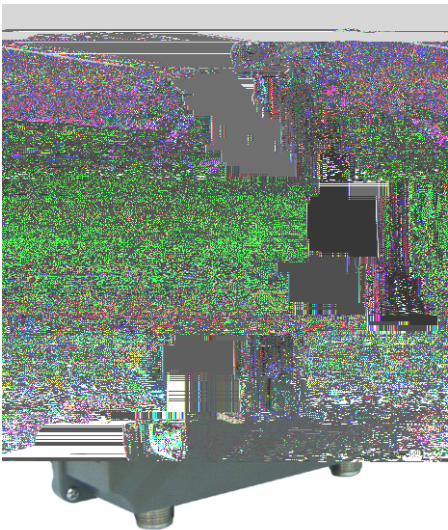

- $\uparrow$
- $\downarrow$
- **Reset** $\downarrow$ $\uparrow$

☹ **Reset** $\downarrow$ $\uparrow$ $\downarrow$ $\uparrow$ $\downarrow$ $\uparrow$

Reset $\downarrow$ $\uparrow$ $\downarrow$ $\uparrow$ $\downarrow$ $\uparrow$ $\downarrow$ $\uparrow$


4.2.2

- $\uparrow$
- $\downarrow$

- ### 4.2.3 LEDs

ᐃᓄ		ᐱ		ᐱ	
				ᐱ	
			ᐱ	ᐱ ᐱ	
			ᐱ	ᐱ	
			ᐱ	ᐱ	

4.2.4 RF

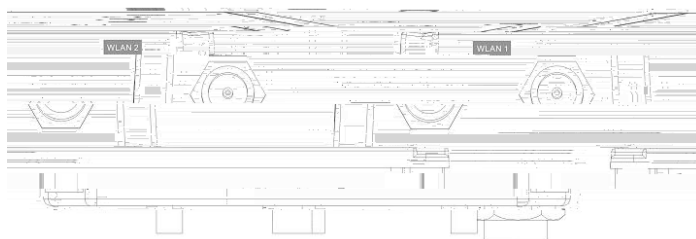

--	--	--




4.3

4.3.1 RG-P-780

☺ ωΨ Ι Ι υ 3 3 ά 3 ή ά
 т Ι υ 3 6 Š υ 3 ϕ

4. †



↑

Л

✕

↑

L

7.



4

T 6

•

1

 $\hat{a} \quad \gamma \quad \phi$

2


^

4

^

PWR-LAN OUT


^

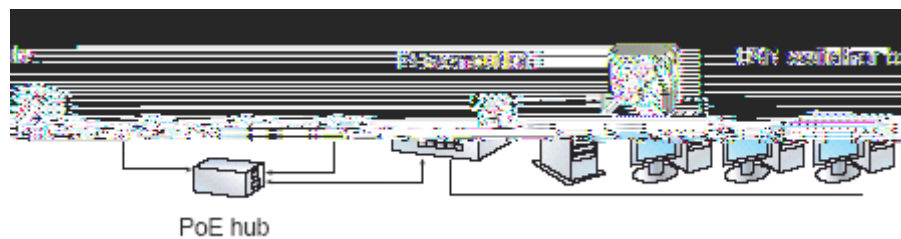LAN-IN $\wedge$ 




5

1.



2.

↓





3.

␣



! ǎ' 0 ↓ § "l § admin ǎ § admin01

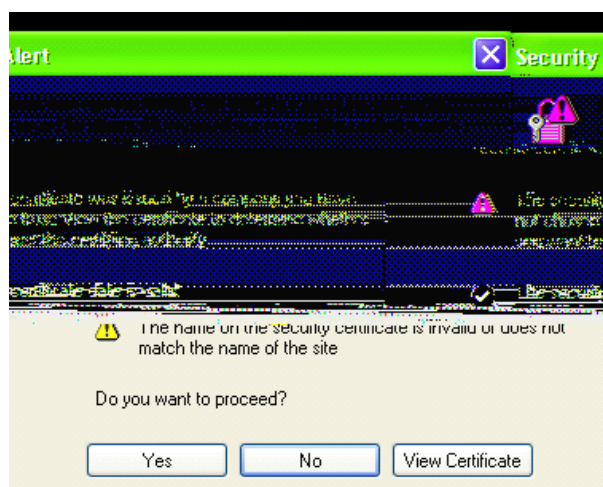

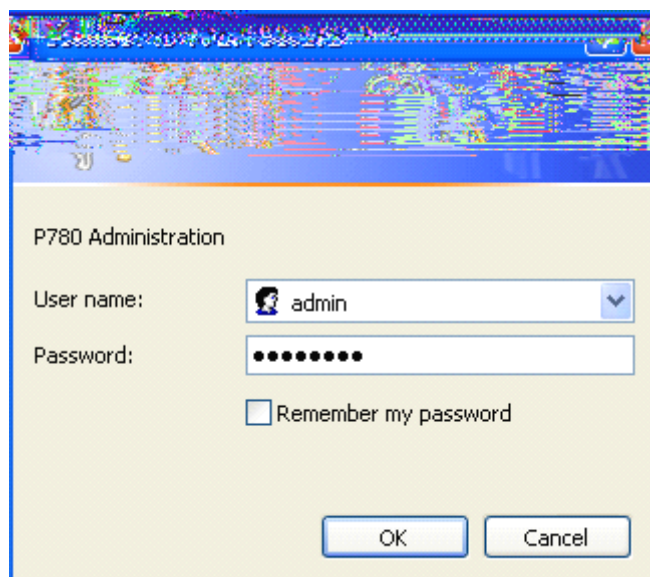

4. 单击 确定 按钮。




à ã e l я з j ð ω Æ ó φ ° i μ i ¶



6

6.1

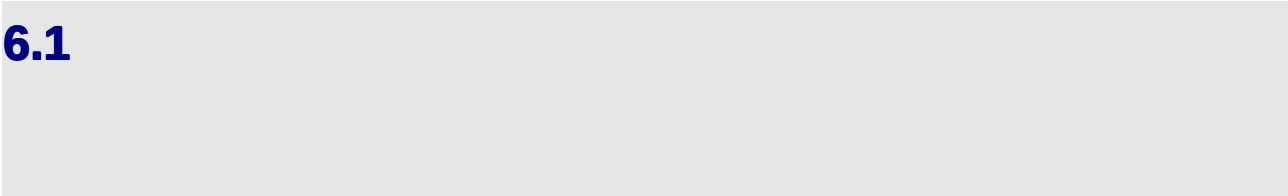

1

||

4 77 77 4

4 :

77 1





	x	
1		
1		
↑		
9	~	↑
1 1		

6.2

1 1 1



	Frequency range	2400 MHz - 2483 MHz	5150 MHz - 5875 MHz
	Peak gain	4.5 dBi	7.0 dBi
	Average gain	2.5 dBi	5.0 dBi
	VSWR	2.0 : 1 Max.	-
	Polarization	Linear, vertical	-
Power handling			2 W (cw)
Impedance			50 Ohms
Connector			RP-N plug

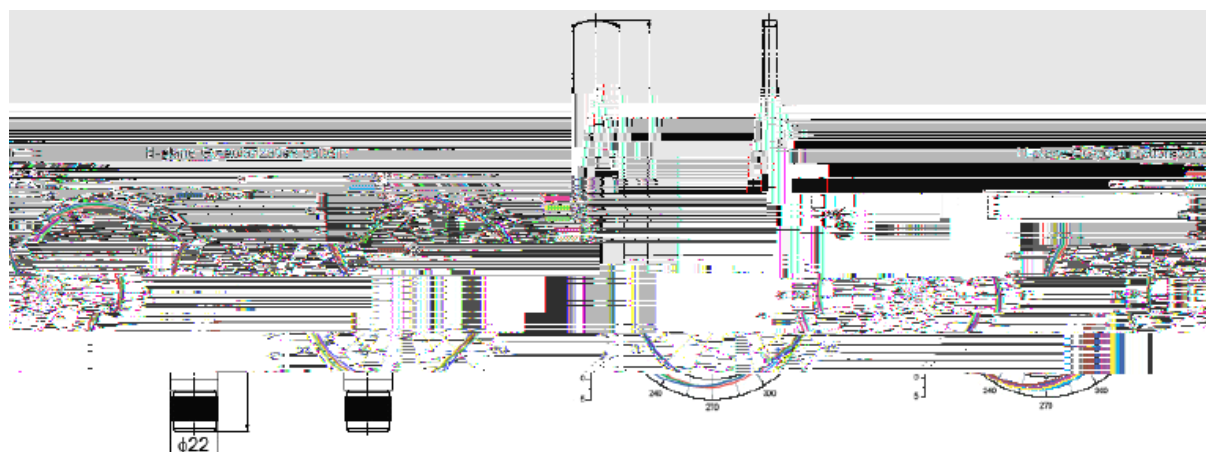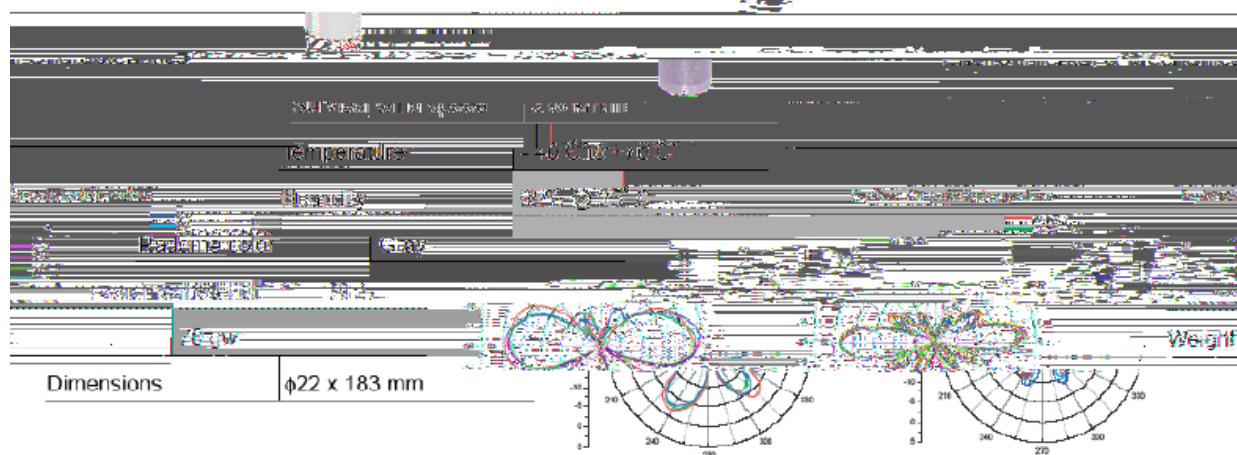

6.3

