



UG0V5633G0V

V4134

©2014

III

¶ ¶ ¶ ¶ ¶

¶ III



III

III

III

III

III


RG-S2600-S	QOS	4	4	III	III
„ RG-S2600-S					

	GB4943-2011
× × mm	440 × 200×44
kg	3.9 kg


a RG-S2600G-S ,yì0 o A %!6 }“c,B/ !6¶ŸV•NM¬(\$ d}ã5Æã• ¶Ÿ ‘
s c\$ ðÜ-¬¶û î d

RG-S2628G-S 24 10/100Base-T 42 2 SFP 41
Console III

1-1 RG-S2628G-S

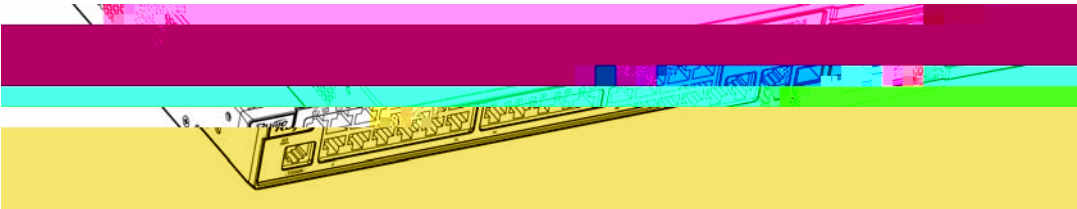


1-2 RG-S2628G-S

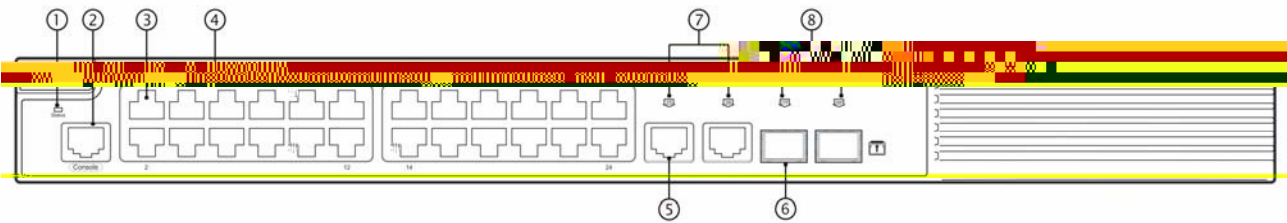

1	5 10/100/1000Base-T
2 Console	6 1000Base-X SFP /2.5G
3 10/100Base-T	7 10/100/1000Base-T
4 10/100Base-T	8 1000Base-X SFP

1-3 RG-S2628G-S

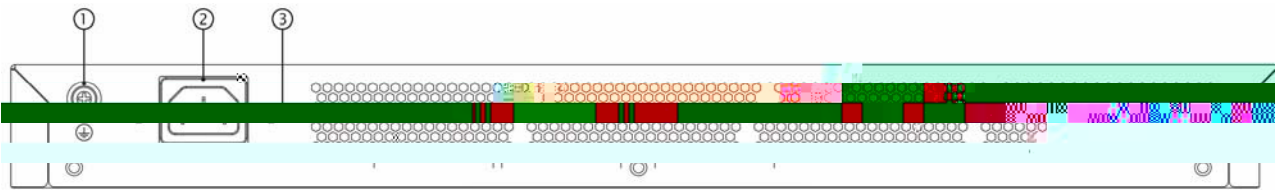

1

2

			Link Up


1.2 RG-S2652G-S

	RG-S2652G-S		
	Mini-GBIC-SX Mini-GBIC-LX Mini-GBIC-LH40 Mini-GBIC-ZX50 Mini-GBIC-ZX80 Mini-GBIC-ZX100 1000Base-T Mini-GBIC-GT SFP GE-SFP-STACK1.6M		
	[f Ö ø Ü ¶ Ÿ ; ¨ W í n ~ È † 8 , î d		
SFP	1000Base-X 2.5G		
	AC	100-240V~ 90-264V~ 50-60Hz 2A	
	28W		
	0°C ~ 50°C		
	-40°C ~ 70°C		
	10% ~ 90% RH		
	5% ~ 90% RH		
EMI	GB9254-2008		
	GB4943-2011		
× × mm	440 × 260×44		
kg	4.2 kg		


[a](#) RG-S2600G-S ,yì0o A %!6 }“c,B/ !6¶ŸV•NM¬(\$ d}ã5Æã• ¶Ÿ ‘
sc\$ ðÜ-¬¶û î d

RG-S2652G-S 48 10/100Base-T 42 2 SFP 41
Console III

1-4 RG-S2652G-S

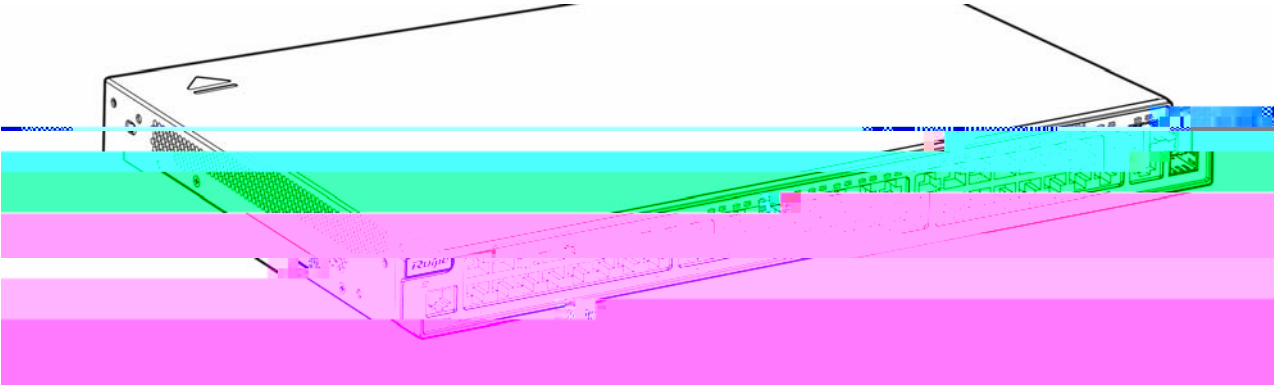


1-5 RG-S2652G-S

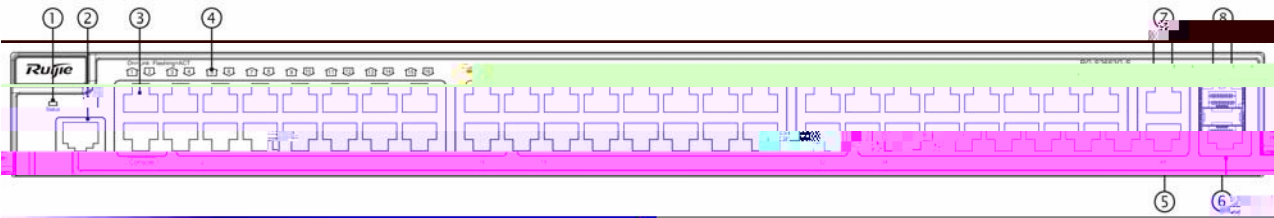

- | | | |
|----------------|---|----------------------|
| 1 | 5 | 10/100/1000Base-T |
| 2 Console | 6 | 1000Base-X SFP /2.5G |
| 3 10/100Base-T | 7 | 10/100/1000Base-T |
| 4 10/100Base-T | 8 | 1000Base-X SFP |

1-6 RG-S2652G-S

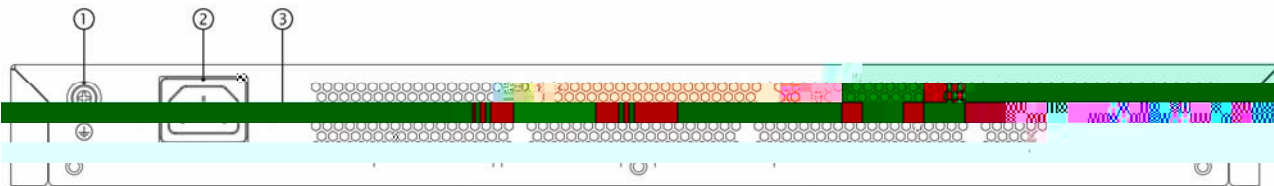

1	3
2	

RG-S2652G-S III

” AC
100-240V~
90-264V~
50-60Hz
2A
10A

RG-S2652G-S III 3 10cm
III
III

	Status		
			III
			III
		5.2	III
RJ-45	1~50		Link
			Link Up
SFP	51F 52F		Link
			Link Up

2

2.1

t¥G s ä•••Nd½ È} m RG-S2600-S ,y!6 ••...g`‡à æÙĐd
»• æÙĐÉâ•fN ¶Ÿ{£ ¢Æãd

2.1.1

” III
” III
” III
” III

2.1.2

” III
” III
” III

2.1.3

” III III
” III
” III
” III
” III
” III

a âŸ³câþò (w´¶Ÿäoe yg(lÉó¹fÉs~ä•••NX7c!a d½d
a g¹¶6j^~. ^:BcÇ(¶ŸÔÿ!a ¢d

2.1.4

” III

” III

” III

2.1.5

RG-S2600-S III

” III

” III

[a](#) M â } å 5 Æ ã • [â ¶ » ¬ - g Ê > Ç » G • N d 5 R E * d

2.2

RG-S2600-S III

2.2.1

RG-S2600-S 10cm

0°C-50°C	10%-90%
----------	---------

••]´,B1cig h\$ }••o¯• l P¨ hdo P	1.5m :g Éo•••KP	0.4m
%o h ô d		

2.2.3

III

III

ũ 0.5 µ m	/ m³	Ű 3.5 × 10 ⁶
ũ 5 µ m	/ m³	Ű 3 × 10 ⁴

	¶ ¶	III
III	¶ ¶ ¶	

2.2.5

RG-S2600-S

¶ III
III


[a](#) ì0o ñ p(U ¾ì0o½"c½\$ 7'!Ð N» i pò d

III

III ¶ III
III III

_____,Ð

2.2.7 EMI

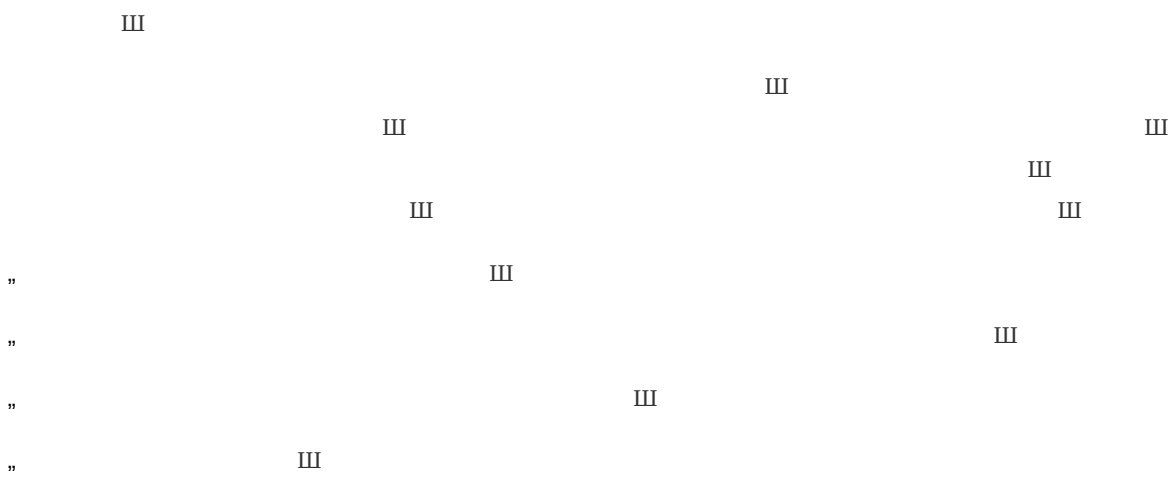

2.3

III

2.4

	¶	¶	¶	¶	¶

RG-S2600-S ,yì0oâ Û]ng]n ‘ ‘•y•d

3.3 RG-S2600-S

” III

” III

” III

” 10 III


” Ч Ч

” III Ч III

3.3.1 19

RG-S2600-S EIA 19 III


3-1

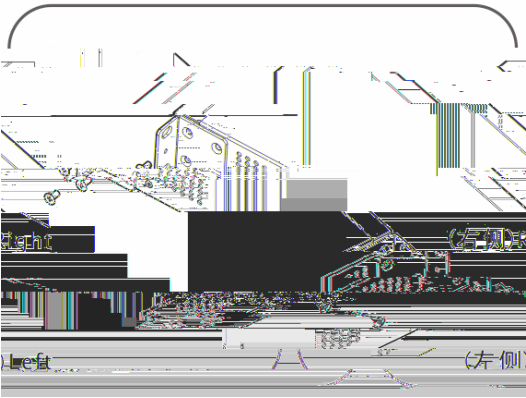

3.3.2

RG-S2600-S III

3-2

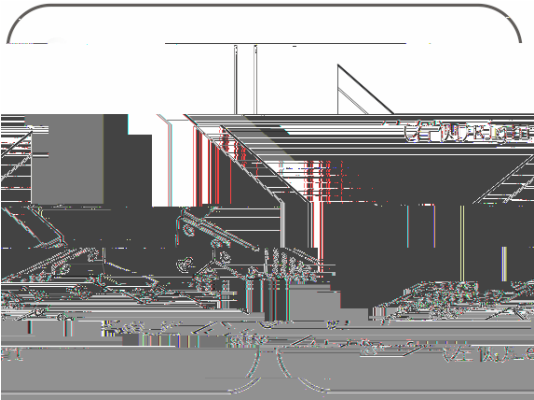

3.3.3

19

” 4 III

” III

3.4

a ı m¾îpò • È¢GòG‘Ž(W »GU Đb•N ~d½ăE*!6æÑ

” III

” ı III

” ı

” III


” 10 III

4


4.1

PC Console 4-1

4-1

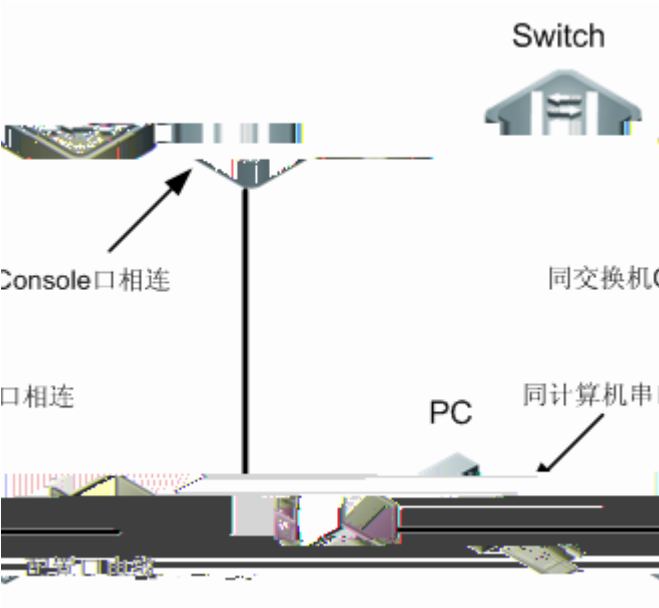

”		DB-9				PC		III	
”		RJ-45				Console		III	
”	PC	PC			Windows3.1	Terminal	Windows 95/98/NT/2000/XP		III
”		III		9600	8		1		III
1)	1	1 - 1	1 - 1	1 - 1	1 - 1	1		4-2	III
4-2									

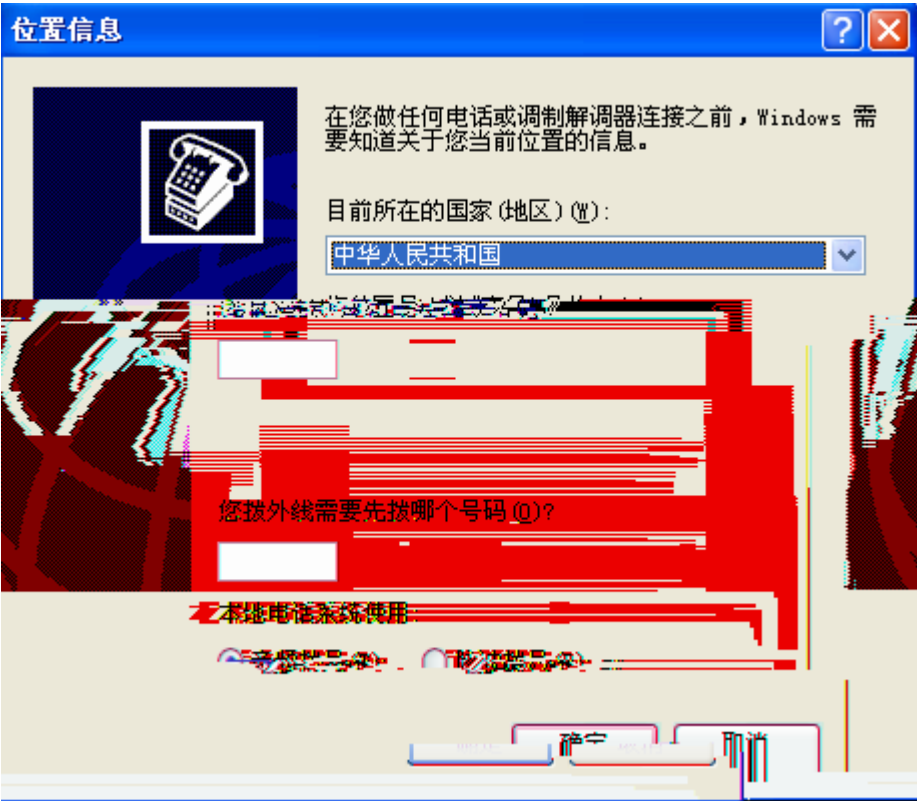

2) I L 4-3 III

4-3



3) < > 4-4


III

4-4

[illegible]


9600

4-5



5) < > 4-6 III



4-6

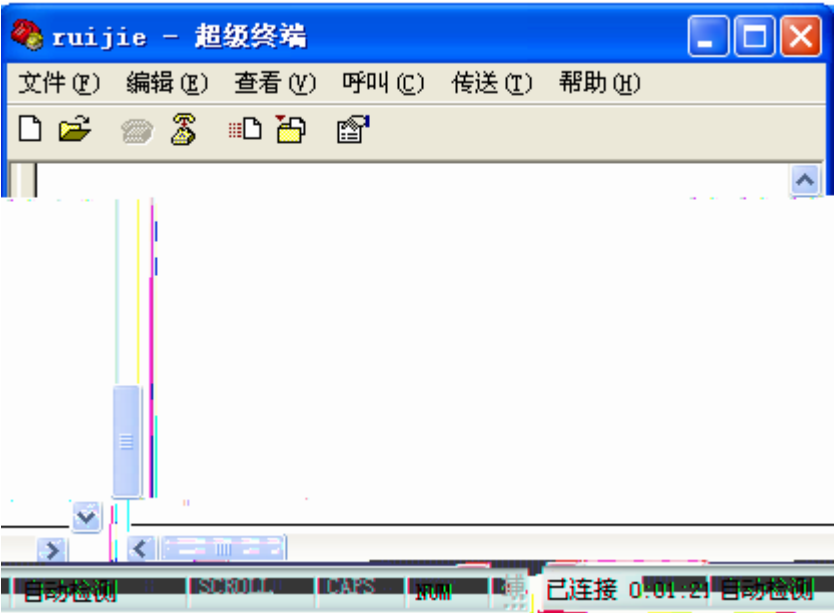

4.2



		III
RJ45	100	

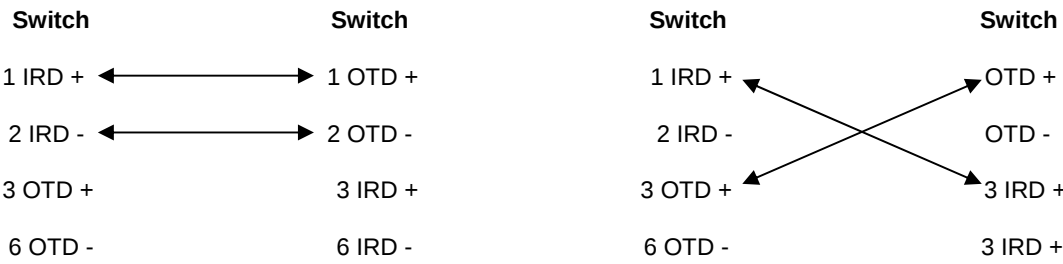

B —Mini-GBIC

SFP SFP Mini-GBIC III

Mini-GBIC SFP

Mini-GBIC(SFP)	(nm)		(m)	(MHz/km)		(dbm) MAX	(dbm) MAX	
FE-SFP-LX-MM1310	1310		62.5/125	N/A	2	-14	-14	
FE-SFP-LH15-SM1310	1310		9/125	N/A	15	-8	-8	
Mini-GBIC-SX	850		62.5 62.5 50.0 50.0	160 200 400 500	220 275 500 550	-4	-17	
Mini-GBIC-LX	1310		62.5 50.0 50.0 9/10	500 400 500 N/A	550 550 550 10	-3	-20	
Mini-GBIC-LH40	1310		9/125	N/A	40			