RGOS®

RGNOS®

http://www.ruijie.com.cn/

http://webchat.ruijie.com.cn

http://www.ruijie.com.cn/service.aspx

7 × 24 4008-111-000

http://support.ruijie.com.cn

service@ruijie.com.cn

| | |
|---|---|
| | |
| | |
| | |

# 1

RG-WALL 1600-S3100

RG-WALL 1600-S3100 1-2 1~7

1-2 RG-WALL 1600-S3100

| # | **LED** | **/** | |
|---|---|---|---|
| 1 | PWR | | |
| | | | |
| 2 | STATUS | | |

| | | | |
|---|---|---|---|
| 3 | USB MGMT | USB | USB |
| 4 | USB | USB | USB گ■ Ş ɢ |

1~10

“ 3.8

1600-S3100

0

2-3

3.8cm

| | |
|---|---|
| 0ºC-40ºC | 20%- |

| | mg/m$^3$ | mg/m$^3$ |
|---|---|---|
| | 0.2 | 1.5 |
| | 0.006 | 0.03 |
| | 0.04 | 0.15 |
| | 0.05 | 0.15 |
| | 0.01 | 0.3 |

### 2.2.5

RG-WALL 1600-S3100

RG-WALL 1600-S3100 100-240 VAC, 50-60 Hz

### 2.2.6

RG-WALL 1600-S3100

### 2.2.7 EMI

## 2.3

| | |
|---|---|
| | |
| | |
| | |

RG-WALL 1600-S3100

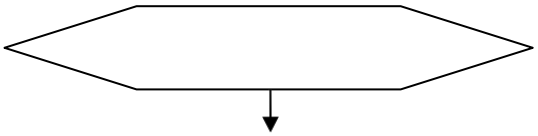

## 3.3

2)

16A

1)

2)

| | | | |
|---|---|---|---|
| 3 | | 1.5 | 14AWG |

## 3.4

1)

1) DB-9 PC

2) RJ45 Console

PC PC Windows3.1 Terminal Windows

3) < > 4-4

4-3

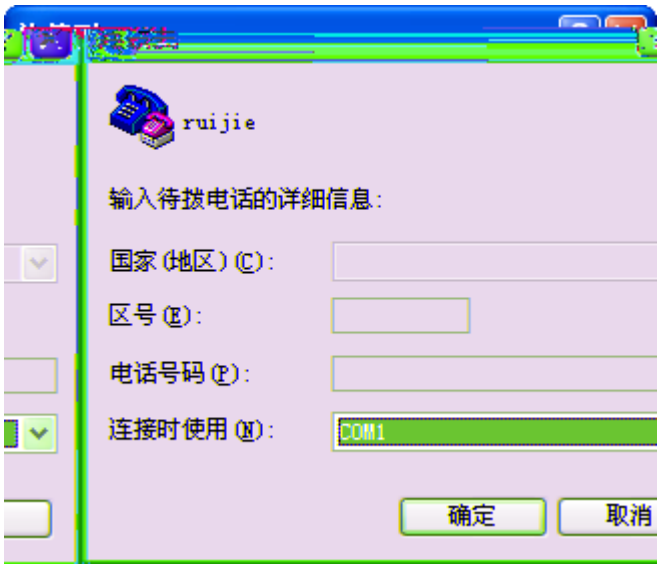


4) . < > 4-5 9600
8 1

4-4

9600 8 1

1)„

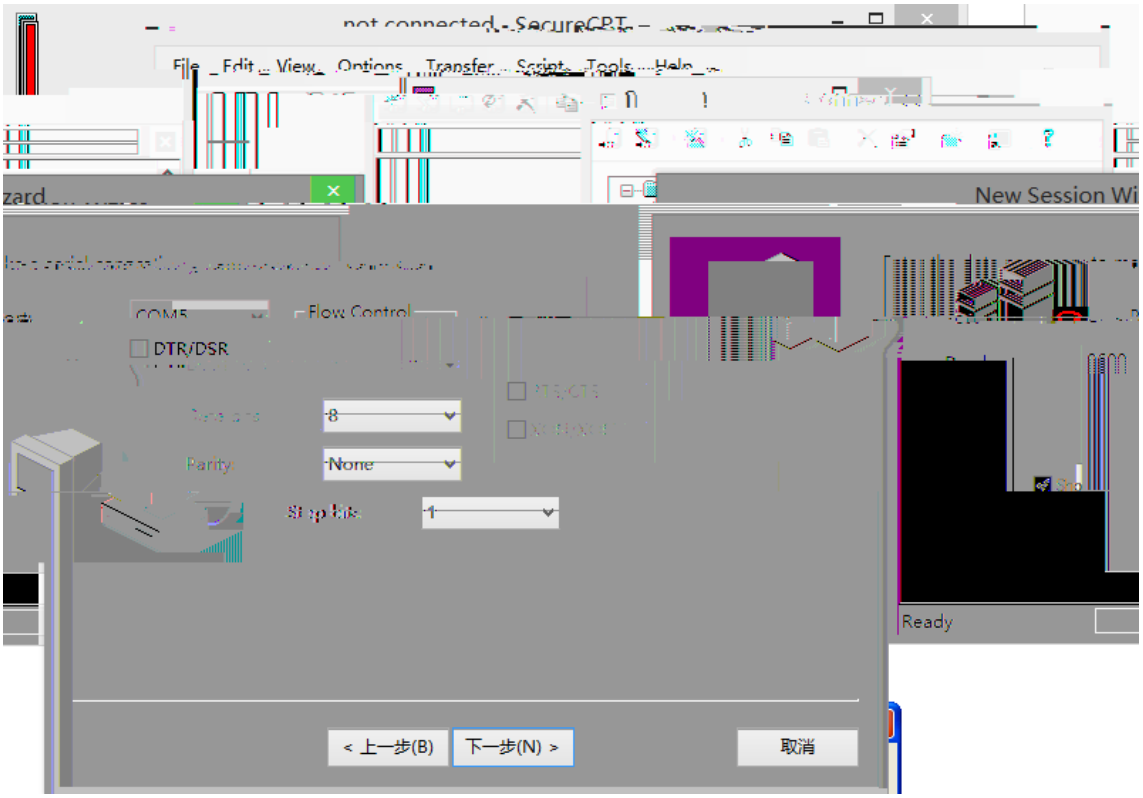
File Edit View Options Transfer Script Tools Help
New Session Wi
Flow Control
DTR/DSR
8
Parity
None
1
Ready
< 上一步(B)
下一步(N) >
取消

4-9

3) “ ” < >

4-10 “ ”

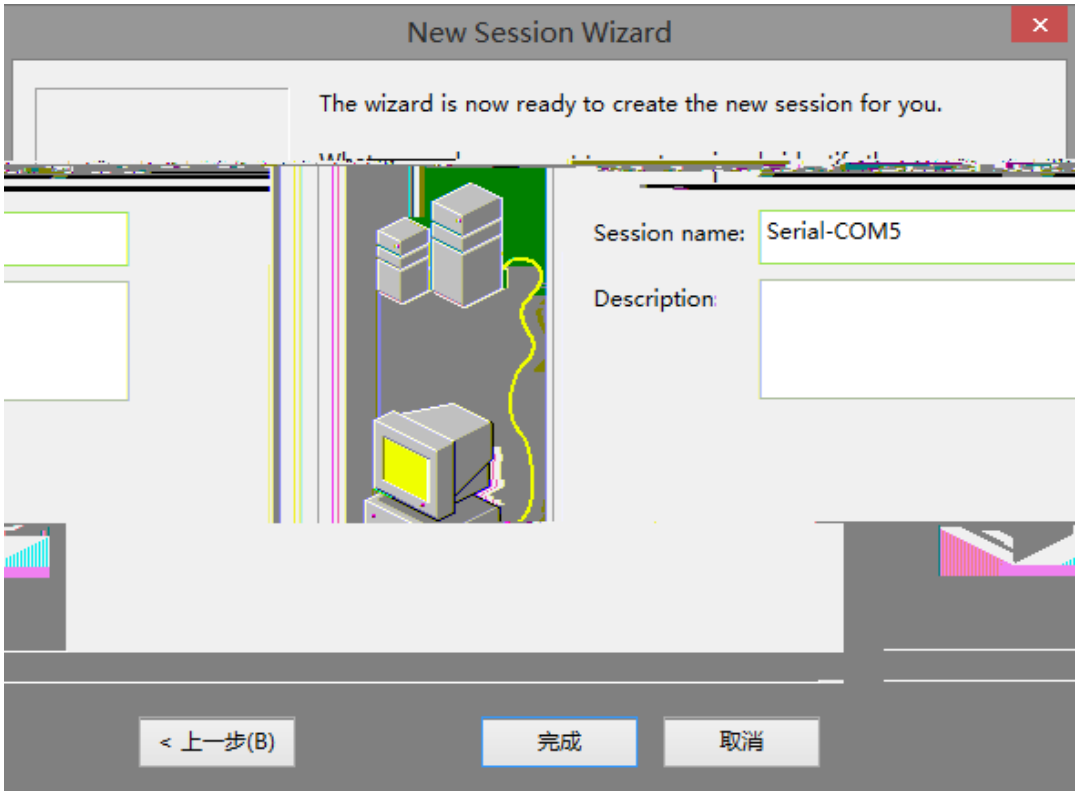
New Session Wizard
The wizard is now ready to create the new session for you.
Session name:
Serial-COM5
Description:
< 上一步(B)
完成
取消

4-10

4) < > 4-11

4-11

# 6

## 6.1

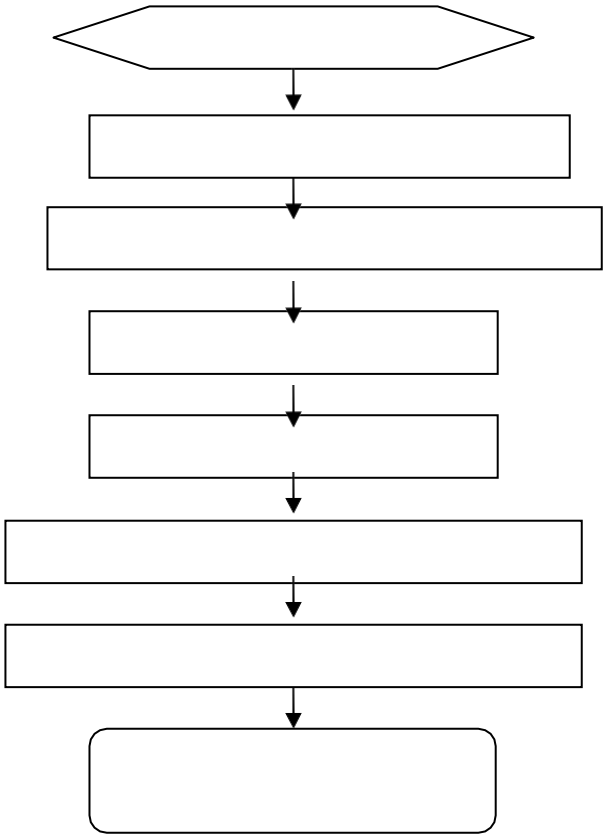

## 6.2

**1**

**2**

Status Power

**3**

Ǫ 2 ɣ

# A

## 1000BASE-T/100BASE-TX/10BASE-T

1000BASE-T/100BASE-TX/10BASE-T MDI/MDIX Crossover

1000BASE-T IEEE 802.3ab 100-ohm 5 5 UTP STP
100 1000BASE-T 4 4 1000BASE-T

A-1 1000BASE-T

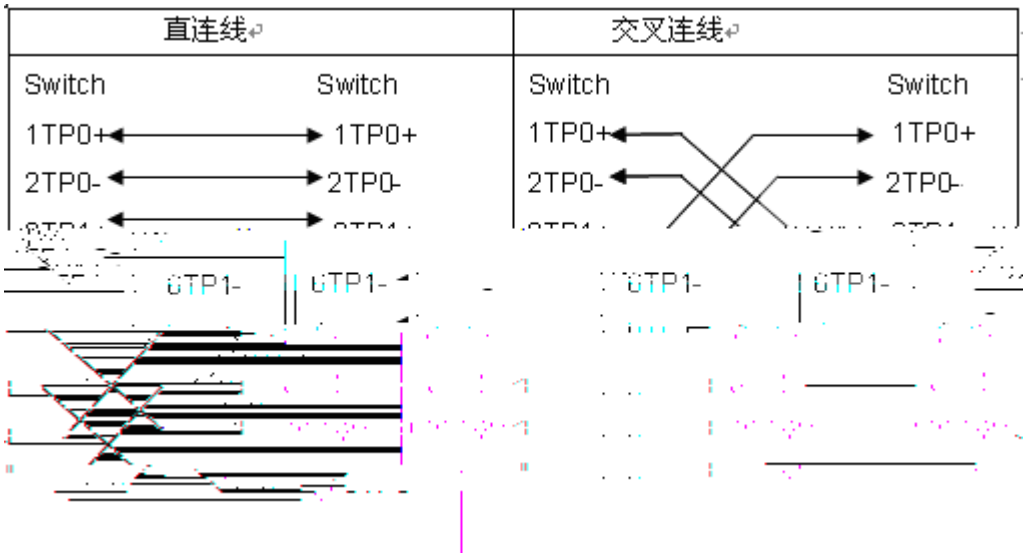


100BASE-TX/10BASE-T 10Mbps 100-ohm 3,4,5 100Mbps
100-ohm 5 100 100BASE-TX/10BASE-T

A-2 100BASE-TX/10BASE-T

| Pin | 插 座 | 插 头 |
|---|---|---|
| 1 | Input Receive Data+ | Output Transmit Data+ |
| 2 | Input Receive Data- | Output Transmit Data- |
| 3 | Output Transmit Data+ | Input Receive Data+ |
| 4 | 4,5,7,8 | Not Used |
| 5 | Not Used | Not Used |
| 6 | Output Transmit Data- | Input Receive Data- |
| 7 | 4,5,7,8 | Not Used |
| 8 | Not Used | Not Used |

100BASE-TX/10BASE-T

A-3 100BASE-TX/10BASE-T

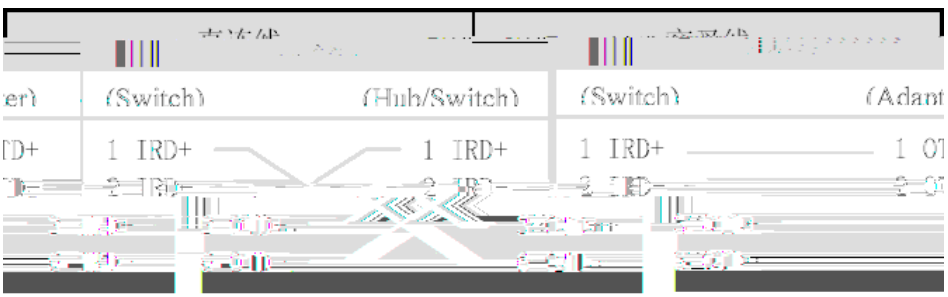

A 4

## B

RG-WALL 1600-S3100 19

D-2

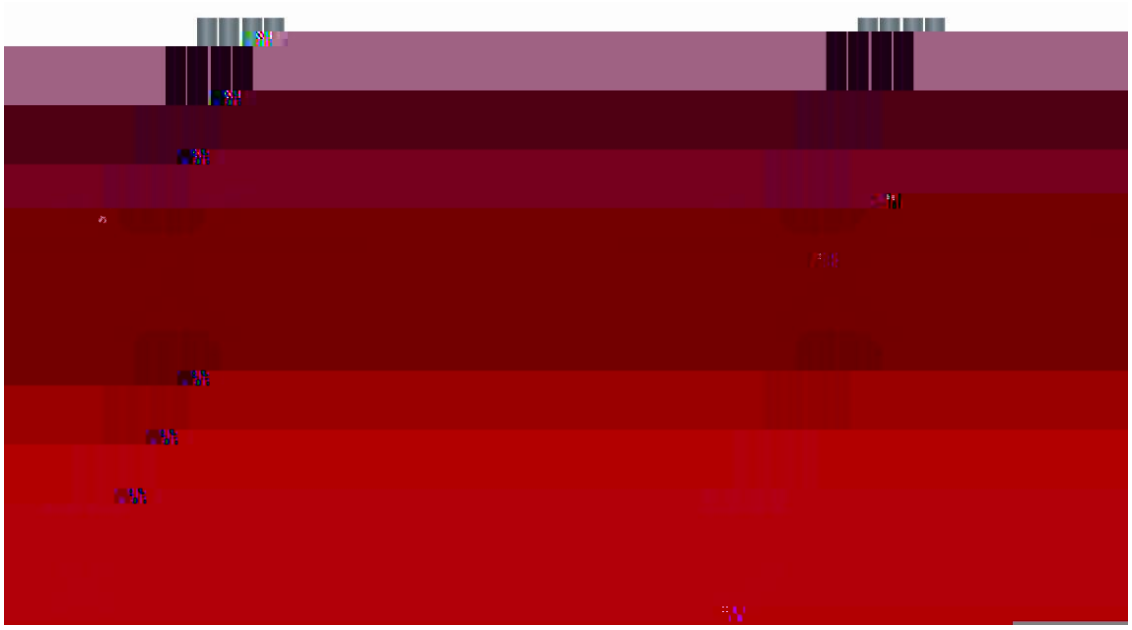

D-3

D-3

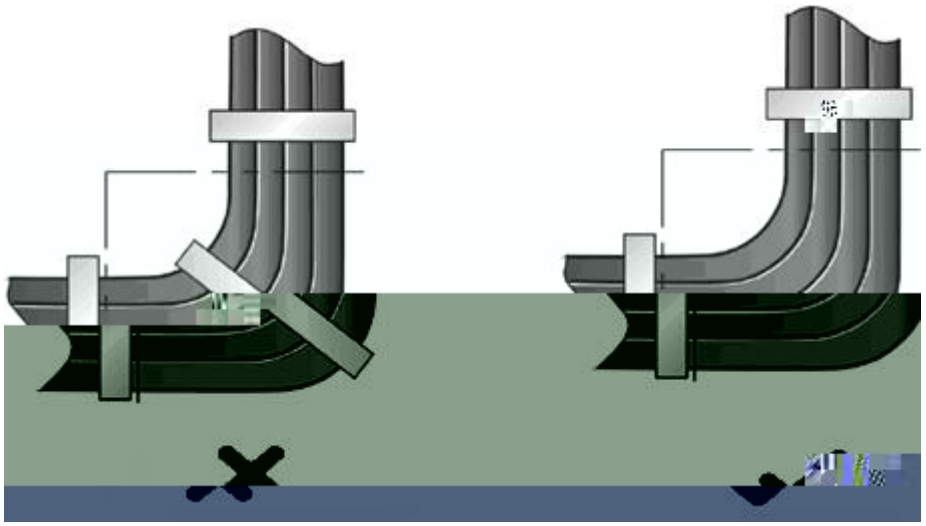

220V -48V

D-4

D-4

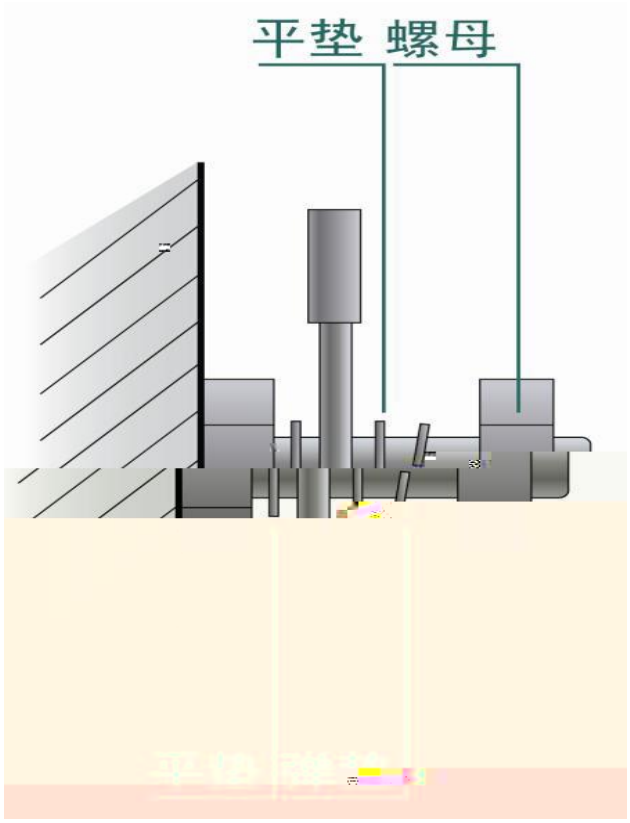


| mm | mm |
|---|---|
| 10 | 80~150 |
| 10~30 | 150~200 |
| 30 | 200~300 |