

RG-S2910XS-E

S2910_RGOS11.4(1)B1 w4

Ruijie
Networks

Ruijie锐捷
Networks

Ruijie锐捷网络

锐捷网络

Ruijie

锐捷网络®

Ruijie®

RGOS®

RGNOS

睿捷网络锐捷®

锐捷网络®

Red-Giant锐捷®锐捷

	Ç	Σ	Η	İ̇	.	ı	
	Ѓ	Ѓ	Ѓ	İ̇	'		u
	л	е	ѡ	Ѓ	İ̇ F ^D	Ç	
	"	л	е,	"			

[illegible]



$\exists x(Ax \rightarrow \neg ax) \quad \sim$ $\exists x(Ax \rightarrow \neg bx)$

ḏ ṯ "A 𐤀	𐤁
	𐤂 𐤃 𐤄 𐤅 𐤆 "O 𐤇 "A 𐤈
	ḏ ṯ "A 𐤁 "O 𐤇 𐤈 𐤉 𐤊 𐤋 𐤌 𐤍 𐤎 𐤏 𐤐 𐤑 𐤒 𐤓 𐤔 𐤕 𐤖 𐤗 𐤘 𐤙 𐤚 𐤛 𐤜 𐤝 𐤞 𐤟 𐤠 𐤡 𐤢 𐤣 𐤤 𐤥 𐤦 𐤧 𐤨 𐤩 𐤪 𐤫 𐤬 𐤭 𐤮 𐤯 𐤰 𐤱 𐤲 𐤳 𐤴 𐤵 𐤶 𐤷 𐤸 𐤹 𐤺 𐤻 𐤼 𐤽 𐤾 𐤿 𐥀 𐥁 𐥂 𐥃 𐥄 𐥅 𐥆 𐥇 𐥈 𐥉 𐥊 𐥋 𐥌 𐥍 𐥎 𐥏 𐥐 𐥑 𐥒 𐥓 𐥔 𐥕 𐥖 𐥗 𐥘 𐥙 𐥚 𐥛 𐥜 𐥝 𐥞 𐥟 𐥠 𐥡 𐥢 𐥣 𐥤 𐥥 𐥦 𐥧 𐥨 𐥩 𐥪 𐥫 𐥬 𐥭 𐥮 𐥯 𐥰 𐥱 𐥲 𐥳 𐥴 𐥵 𐥶 𐥷 𐥸 𐥹 𐥺 𐥻 𐥼 𐥽 𐥾 𐥿 𐦀 𐦁 𐦂 𐦃 𐦄 𐦅 𐦆 𐦇 𐦈 𐦉 𐦊 𐦋 𐦌 𐦍 𐦎 𐦏 𐦐 𐦑 𐦒 𐦓 𐦔 𐦕 𐦖 𐦗 𐦘 𐦙 𐦚 𐦛 𐦜 𐦝 𐦞 𐦟 𐦠 𐦡 𐦢 𐦣 𐦤 𐦥 𐦦 𐦧 𐦨 𐦩 𐦪 𐦫 𐦬 𐦭 𐦮 𐦯 𐦰 𐦱 𐦲 𐦳 𐦴 𐦵 𐦶 𐦷 𐦸 𐦹 𐦺 𐦻 𐦼 𐦽 𐦾 𐦿 𐧀 𐧁 𐧂 𐧃 𐧄 𐧅 𐧆 𐧇 𐧈 𐧉 𐧊 𐧋 𐧌 𐧍 𐧎 𐧏 𐧐 𐧑 𐧒 𐧓 𐧔 𐧕 𐧖 𐧗 𐧘 𐧙 𐧚 𐧛 𐧜 𐧝 𐧞 𐧟 𐧠 𐧡 𐧢 𐧣 𐧤 𐧥 𐧦 𐧧 𐧨 𐧩 𐧪 𐧫 𐧬 𐧭 𐧮 𐧯 𐧰 𐧱 𐧲 𐧳 𐧴 𐧵 𐧶 𐧷 𐧸 𐧹 𐧺 𐧻 𐧼 𐧽 𐧾 𐧿 𐨀 𐨁 𐨂 𐨃 𐨄 𐨅 𐨆 𐨇 𐨈 𐨉 𐨊 𐨋 𐨌 𐨍 𐨎 𐨏 𐨐 𐨑 𐨒 𐨓 𐨔 𐨕 𐨖 𐨗 𐨘 𐨙 𐨚 𐨛 𐨜 𐨝 𐨞 𐨟 𐨠 𐨡 𐨢 𐨣 𐨤 𐨥 𐨦 𐨧 𐨨 𐨩 𐨪 𐨫 𐨬 𐨭 𐨮 𐨯 𐨰 𐨱 𐨲 𐨳 𐨴 𐨵 𐨶 𐨷 𐨸 𐨹 𐨺 𐨻 𐨼 𐨽 𐨾 𐨿 𐩀 𐩁 𐩂 𐩃 𐩄 𐩅 𐩆 𐩇 𐩈 𐩉 𐩊 𐩋 𐩌 𐩍 𐩎 𐩏 𐩐 𐩑 𐩒 𐩓 𐩔 𐩕 𐩖 𐩗 𐩘 𐩙 𐩚 𐩛 𐩜 𐩝 𐩞 𐩟 𐩠 𐩡 𐩢 𐩣 𐩤 𐩥 𐩦 𐩧 𐩨 𐩩 𐩪 𐩫 𐩬 𐩭 𐩮 𐩯 𐩰 𐩱 𐩲 𐩳 𐩴 𐩵 𐩶 𐩷 𐩸 𐩹 𐩺 𐩻 𐩼 𐩽 𐩾 𐩿 𐪀 𐪁 𐪂 𐪃 𐪄 𐪅 𐪆 𐪇 𐪈 𐪉 𐪊 𐪋 𐪌 𐪍 𐪎 𐪏 𐪐 𐪑 𐪒 𐪓 𐪔 𐪕 𐪖 𐪗 𐪘 𐪙 𐪚 𐪛 𐪜 𐪝 𐪞 𐪟 𐪠 𐪡 𐪢 𐪣 𐪤 𐪥 𐪦 𐪧 𐪨 𐪩 𐪪 𐪫 𐪬 𐪭 𐪮 𐪯 𐪰 𐪱 𐪲 𐪳 𐪴 𐪵 𐪶 𐪷 𐪸 𐪹 𐪺 𐪻 𐪼 𐪽 𐪾 𐪿 𐫀 𐫁 𐫂 𐫃 𐫄 𐫅 𐫆 𐫇 𐫈 𐫉 𐫊 𐫋 𐫌 𐫍 𐫎 𐫏 𐫐 𐫑 𐫒 𐫓 𐫔 𐫕 𐫖 𐫗 𐫘 𐫙 𐫚 𐫛 𐫜 𐫝 𐫞 𐫟 𐫠 𐫡 𐫢 𐫣 𐫤 𐫥 𐫦 𐫧 𐫨 𐫩 𐫪 𐫫 𐫬 𐫭 𐫮 𐫯 𐫰 𐫱 𐫲 𐫳 𐫴 𐫵 𐫶 𐫷 𐫸 𐫹 𐫺 𐫻 𐫼 𐫽 𐫾 𐫿 𐬀 𐬁 𐬂 𐬃 𐬄 𐬅 𐬆 𐬇 𐬈 𐬉 𐬊 𐬋 𐬌 𐬍 𐬎 𐬏 𐬐 𐬑 𐬒 𐬓 𐬔 𐬕 𐬖 𐬗 𐬘 𐬙 𐬚 𐬛 𐬜 𐬝 𐬞 𐬟 𐬠 𐬡 𐬢 𐬣 𐬤 𐬥 𐬦 𐬧 𐬨 𐬩 𐬪 𐬫 𐬬 𐬭 𐬮 𐬯 𐬰 𐬱 𐬲 𐬳 𐬴 𐬵 𐬶 𐬷 𐬸 𐬹 𐬺 𐬻 𐬼 𐬽 𐬾 𐬿 𐭀 𐭁 𐭂 𐭃 𐭄 𐭅 𐭆 𐭇 𐭈 𐭉 𐭊 𐭋 𐭌 𐭍 𐭎 𐭏 𐭐 𐭑 𐭒 𐭓 𐭔 𐭕 𐭖 𐭗 𐭘 𐭙 𐭚 𐭛 𐭜 𐭝 𐭞 𐭟 𐭠 𐭡 𐭢 𐭣 𐭤 𐭥 𐭦 𐭧 𐭨 𐭩 𐭪 𐭫 𐭬 𐭭 𐭮 𐭯 𐭰 𐭱 𐭲 𐭳 𐭴 𐭵 𐭶 𐭷 𐭸 𐭹 𐭺 𐭻 𐭼 𐭽 𐭾 𐭿 𐮀 𐮁 𐮂 𐮃 𐮄 𐮅 𐮆 𐮇 𐮈 𐮉 𐮊 𐮋 𐮌 𐮍 𐮎 𐮏 𐮐 𐮑 𐮒 𐮓 𐮔 𐮕 𐮖 𐮗 𐮘 𐮙 𐮚 𐮛 𐮜 𐮝 𐮞 𐮟 𐮠 𐮡 𐮢 𐮣 𐮤 𐮥 𐮦 𐮧 𐮨 𐮩 𐮪 𐮫 𐮬 𐮭 𐮮 𐮯 𐮰 𐮱 𐮲 𐮳 𐮴 𐮵 𐮶 𐮷 𐮸 𐮹 𐮺 𐮻 𐮼 𐮽 𐮾 𐮿 𐯀 𐯁 𐯂 𐯃 𐯄 𐯅 𐯆 𐯇 𐯈 𐯉 𐯊 𐯋 𐯌 𐯍 𐯎 𐯏 𐯐 𐯑 𐯒 𐯓 𐯔 𐯕 𐯖 𐯗 𐯘 𐯙 𐯚 𐯛 𐯜 𐯝 𐯞 𐯟 𐯠 𐯡 𐯢 𐯣 𐯤 𐯥 𐯦 𐯧 𐯨 𐯩 𐯪 𐯫 𐯬 𐯭 𐯮 𐯯 𐯰 𐯱 𐯲 𐯳 𐯴 𐯵 𐯶 𐯷 𐯸 𐯹 𐯺 𐯻 𐯼 𐯽 𐯾 𐯿 𐰀 𐰁 𐰂 𐰃 𐰄 𐰅 𐰆 𐰇 𐰈 𐰉 𐰊 𐰋 𐰌 𐰍 𐰎 𐰏 𐰐 𐰑 𐰒 𐰓 𐰔 𐰕 𐰖 𐰗 𐰘 𐰙 𐰚 𐰛 𐰜 𐰝 𐰞 𐰟 𐰠 𐰡 𐰢



ǎ ĩ ȧ Ñ Ź ɿ ɲ ȳ ı ɓ ȩ ɢ ɣ

g. 1 п W J 3


首页


系统首页

设备型号: [模糊] 系统告警: 目前有1条系统告警信息 [查看详情](#)

1

系统时间: 2023-10-27 15:30:30

告警



1.3 Eweb



设备型号	名称
编辑	名称: 设备名称 设备型号: 设备型号 设备地址: 设备地址
删除	

	Æ i p 1 n J [00] — A ō y X
保存设置	3 è Y i ō Γ X 3 è 3 [00] 3 U
	r J
	.. J
全选 反选 取消选择	— y Æ ĩ j n HÄ i y ̂ — L i A " X E ō i ^ [00] — é ō A i HÄ
*	o j i y 3 i a y ō y N " o j
	"
	o



D J i [00] — g,

可选端口 不可选端口 选中端口 聚合端口 Trunk口 电口 光口

1	3	5	7	9	11	13	15	17	19	21	23												
2	4	6	8	10	12	14	16	18	20	22	24	25	26	27	28								

提示：可按住左键拖拽选取多个端口

全选 反选 取消选择

y L i [00] — g,

可选端口 不可选端口 选中端口 聚合端口 Trunk口 电口 光口

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22

提示：可按住左键拖拽选取多个端口

提示：可按住右键拖拽选取多个端口


提示：可按住右键拖拽选取多个端口

选择的端口：

● — HÄ

i Q % e` — i [00] y Æ ä ä ö u % t ^ A y Æ i Æ y Æ y Æ A y Æ i Q M A [00] y Æ J i b || r y Æ ō i y Æ ü Q 3 y Æ y i A [00] y Æ h Y ä Rs ñ ° p y Æ — i A [00] A† A

z D J i [00] A y Æ — g,



ı ĭ ı́ ı̂	Ä ı
	ı ı̃ ı̄ ı̅ ı̆ ı̇ ı̈ ı̉ ı̊ ı̋ ı̌ ı̍ ı̎ ı̏ ı̐ ı̑ ı̒ ı̓ ı̔ ı̕ ı̖ ı̗ ı̘ ı̙ ı̚ ı̛ ı̜ ı̝ ı̞ ı̟ ı̠ ı̡ ı̢ ı̣ ı̤ ı̥ ı̦ ı̧ ı̨ ı̩ ı̪ ı̫ ı̬ ı̭ ı̮ ı̯ ı̰ ı̱ ı̲ ı̳ ı̴ ı̵ ı̶ ı̷ ı̸ ı̹ ı̺ ı̻ ı̼ ı̽ ı̾ ı̿ ı̺̃ ı̻̃ ı̼̃ ı̽̃ ı̾̃ ı̿̃ ı̺̄ ı̻̄ ı̼̄ ı̽̄ ı̾̄ ı̿̄ ı̺̅ ı̻̅ ı̼̅ ı̽̅ ı̾̅ ı̿̅ ı̺̆ ı̻̆ ı̼̆ ı̽̆ ı̾̆ ı̿̆ ı̺̇ ı̻̇ ı̼̇ ı̽̇ ı̾̇ ı̿̇ ı̺̈ ı̻̈ ı̼̈ ı̽̈ ı̾̈ ı̿̈ ı̺̉ ı̻̉ ı̼̉ ı̽̉ ı̾̉ ı̿̉ ı̺̊ ı̻̊ ı̼̊ ı̽̊ ı̾̊ ı̿̊ ı̺̋ ı̻̋ ı̼̋ ı̽̋ ı̾̋ ı̿̋ ı̺̌ ı̻̌ ı̼̌ ı̽̌ ı̾̌ ı̿̌ ı̺̍ ı̻̍ ı̼̍ ı̽̍ ı̾̍ ı̿̍ ı̺̎ ı̻̎ ı̼̎ ı̽̎ ı̾̎ ı̿̎ ı̺̏ ı̻̏ ı̼̏ ı̽̏ ı̾̏ ı̿̏ ı̺̐ ı̻̐ ı̼̐ ı̽̐ ı̾̐ ı̿̐ ı̺̑ ı̻̑ ı̼̑ ı̽̑ ı̾̑ ı̿̑ ı̺̒ ı̻̒ ı̼̒ ı̽̒ ı̾̒ ı̿̒ ı̺̓ ı̻̓ ı̼̓ ı̽̓ ı̾̓ ı̿̓ ı̺̔ ı̻̔ ı̼̔ ı̽̔ ı̾̔ ı̿̔ ı̺̕ ı̻̕ ı̼̕ ı̽̕ ı̾̕ ı̿̕ ı̺̖ ı̻̖ ı̼̖ ı̖̽ ı̖̾ ı̖̿ ı̺̗ ı̻̗ ı̼̗ ı̗̽ ı̗̾ ı̗̿ ı̺̘ ı̻̘ ı̼̘ ı̘̽ ı̘̾ ı̘̿ ı̺̙ ı̻̙ ı̼̙ ı̙̽ ı̙̾ ı̙̿ ı̺̚ ı̻̚ ı̼̚ ı̽̚ ı̾̚ ı̿̚ ı̛̺ ı̛̻ ı̛̼ ı̛̽ ı̛̾ ı̛̿ ı̺̜ ı̻̜ ı̼̜ ı̜̽ ı̜̾ ı̜̿ ı̺̝ ı̻̝ ı̼̝ ı̝̽ ı̝̾ ı̝̿ ı̺̞ ı̻̞ ı̼̞ ı̞̽ ı̞̾ ı̞̿ ı̺̟ ı̻̟ ı̼̟ ı̟̽ ı̟̾ ı̟̿ ı̺̠ ı̻̠ ı̼̠ ı̠̽ ı̠̾ ı̠̿ ı̡̺ ı̡̻ ı̡̼ ı̡̽ ı̡̾ ı̡̿ ı̢̺ ı̢̻ ı̢̼ ı̢̽ ı̢̾ ı̢̿ ı̺̣ ı̻̣ ı̼̣ ı̣̽ ı̣̾ ı̣̿ ı̺̤ ı̻̤ ı̼̤ ı̤̽ ı̤̾ ı̤̿ ı̺̥ ı̻̥ ı̼̥ ı̥̽ ı̥̾ ı̥̿ ı̺̦ ı̻̦ ı̼̦ ı̦̽ ı̦̾ ı̦̿ ı̧̺ ı̧̻ ı̧̼ ı̧̽ ı̧̾ ı̧̿ ı̨̺ ı̨̻ ı̨̼ ı̨̽ ı̨̾ ı̨̿ ı̺̩ ı̻̩ ı̼̩ ı̩̽ ı̩̾ ı̩̿ ı̺̪ ı̻̪ ı̼̪ ı̪̽ ı̪̾ ı̪̿ ı̺̫ ı̻̫ ı̼̫ ı̫̽ ı̫̾ ı̫̿ ı̺̬ ı̻̬ ı̼̬ ı̬̽ ı̬̾ ı̬̿ ı̺̭ ı̻̭ ı̼̭ ı̭̽ ı̭̾ ı̭̿ ı̺̮ ı̻̮ ı̼̮ ı̮̽ ı̮̾ ı̮̿ ı̺̯ ı̻̯ ı̼̯ ı̯̽ ı̯̾ ı̯̿ ı̺̰ ı̻̰ ı̼̰ ı̰̽ ı̰̾ ı̰̿ ı̺̱ ı̻̱ ı̼̱ ı̱̽ ı̱̾ ı̱̿ ı̺̲ ı̻̲ ı̼̲ ı̲̽ ı̲̾ ı̲̿ ı̺̳ ı̻̳ ı̼̳ ı̳̽ ı̳̾ ı̳̿ ı̴̺ ı̴̻ ı̴̼ ı̴̽ ı̴̾ ı̴̿ ı̵̺ ı̵̻ ı̵̼ ı̵̽ ı̵̾ ı̵̿ ı̶̺ ı̶̻ ı̶̼ ı̶̽ ı̶̾ ı̶̿ ı̷̺ ı̷̻ ı̷̼ ı̷̽ ı̷̾ ı̷̿ ı̸̺ ı̸̻ ı̸̼ ı̸̽ ı̸̾ ı̸̿ ı̺̹ ı̻̹ ı̼̹ ı̹̽ ı̹̾ ı̹̿ ı̺̺ ı̻̺ ı̼̺ ı̺̽ ı̺̾ ı̺̿ ı̺̻ ı̻̻ ı̼̻ ı̻̽ ı̻̾ ı̻̿ ı̺̼ ı̻̼ ı̼̼ ı̼̽ ı̼̾ ı̼̿ ı̺̽ ı̻̽ ı̼̽ ı̽̽ ı̾̽ ı̿̽ ı̺̾ ı̻̾ ı̼̾ ı̽̾ ı̾̾ ı̿̾ ı̺̿ ı̻̿ ı̼̿ ı̽̿ ı̾̿ ı̿̿ ı̺̺̃ ı̻̺̃ ı̼̺̃ ı̺̽̃ ı̺̾̃ ı̺̿̃ ı̺̺̄ ı̻̺̄ ı̼̺̄ ı̺̽̄ ı̺̾̄ ı̺̿̄ ı̺̺̅ ı̻̺̅ ı̼̺̅ ı̺̽̅ ı̺̾̅ ı̺̿̅ ı̺̺̆ ı̻̺̆ ı̼̺̆ ı̺̽̆ ı̺̾̆ ı̺̿̆ ı̺̺̇ ı̻̺̇ ı̼̺̇ ı̺̽̇ ı̺̾̇ ı̺̿̇ ı̺̺̈ ı̻̺̈ ı̼̺̈ ı̺̽̈ ı̺̾̈ ı̺̿̈ ı̺̺̉ ı̻̺̉ ı̼̺̉ ı̺̽̉ ı̺̾̉ ı̺̿̉ ı̺̺̊ ı̻̺̊ ı̼̺̊ ı̺̽̊ ı̺̾̊ ı̺̿̊ ı̺̺̋ ı̻̺̋ ı̼̺̋ ı̺̽̋ ı̺̾̋ ı̺̿̋ ı̺̺̌ ı̻̺̌ ı̼̺̌ ı̺̽̌ ı̺̾̌ ı̺̿̌ ı̺̺̍ ı̻̺̍ ı̼̺̍ ı̺̽̍ ı̺̾̍ ı̺̿̍ ı̺̺̎ ı̻̺̎ ı̼̺̎ ı̺̽̎ ı̺̾̎ ı̺̿̎ ı̺̺̏ ı̻̺̏ ı̼̺̏ ı̺̽̏ ı̺̾̏ ı̺̿̏ ı̺̺̐ ı̻̺̐ ı̼̺̐ ı̺̽̐ ı̺̾̐ ı̺̿̐ ı̺̺̑ ı̻̺̑ ı̼̺̑ ı̺̽̑ ı̺̾̑ ı̺̿̑ ı̺̺̒ ı̻̺̒ ı̼̺̒ ı̺̽̒ ı̺̾̒ ı̺̿̒ ı̺̺̓ ı̻̺̓ ı̼̺̓ ı̺̽̓ ı̺̾̓ ı̺̿̓ ı̺̺̔ ı̻̺̔ ı̼̺̔ ı̺̽̔ ı̺̾̔ ı̺̿̔ ı̺̺̕ ı̻̺̕ ı̼̺̕ ı̺̽̕ ı̺̾̕ ı̺̿̕ ı̺̺̖ ı̻̺̖ ı̼̺̖ ı̺̖̽ ı̺̖̾ ı̺̖̿ ı̺̺̗ ı̻̺̗ ı̼̺̗ ı̺̗̽ ı̺̗̾ ı̺̗̿ ı̺̺̘ ı̻̺̘ ı̼̺̘ ı̺̘̽ ı̺̘̾ ı̺̘̿ ı̺̺̙ ı̻̺̙ ı̼̺̙ ı̺̙̽ ı̺̙̾ ı̺̙̿ ı̺̺̚ ı̻̺̚ ı̼̺̚ ı̺̽̚ ı̺̾̚ ı̺̿̚ ı̛̺̺ ı̛̻̺ ı̛̼̺ ı̛̺̽ ı̛̺̾ ı̛̺̿ ı̺̺̜ ı̻̺̜ ı̼̺̜ ı̺̜̽ ı̺̜̾ ı̺̜̿ ı̺̺̝ ı̻̺̝ ı̼̺̝ ı̺̝̽ ı̺̝̾ ı̺̝̿ ı̺̺̞ ı̻̺̞ ı̼̺̞ ı̺̞̽ ı̺̞̾ ı̺̞̿ ı̺̺̟ ı̻̺̟ ı̼̺̟ ı̺̟̽ ı̺̟̾ ı̺̟̿ ı̺̺̠ ı̻̺̠ ı̼̺̠ ı̺̠̽ ı̺̠̾ ı̺̠̿ ı̡̺̺ ı̡̻̺ ı̡̼̺ ı̡̺̽ ı̡̺̾ ı̡̺̿ ı̢̺̺ ı̢̻̺ ı̢̼̺ ı̢̺̽ ı̢̺̾ ı̢̺̿ ı̺̺̣ ı̻̺̣ ı̼̺̣ ı̺̣̽ ı̺̣̾ ı̺̣̿ ı̺̺̤ ı̻̺̤ ı̼̺̤ ı

Ÿ í´	ᵀ Ǫᵀ ~	Ṽ`´ Խ ʝ ք	ᵀ Ǫ	Ÿ í´
------	--------	-----------	-----	------

1.3.2

VLAN设置

Trunk口设置

+ 添加VLAN

× 删除选中VLAN

☐	VLAN ID	IPv4 IP	掩码	端口	操作
☐	1	1.1.1.1	255.255.255.0	(机箱号/槽号)1/0 : Te0/1,Te0/4,Te0/6-16,En0/17,En0/21,En0/25,En0/29 (机箱号/槽号)1/1 : Te1/1-14	编辑
删除	☐	7		(机箱号/槽号)1/0 : Te0/1,Te0/4,Te0/6-16,En0/17,En0/21,En0/25,En0/29 (机箱号/槽号)1/1 : Te1/1-14	删除
删除	☐	58		(机箱号/槽号)1/1 : Te1/1-11	编辑
删除	☐	66		(机箱号/槽号)1/0 : Te0/1 (机箱号/槽号)1/1 : Te1/1-11	删除
				(机箱号/槽号)1/0 : Te0/1	
				76	

◀ 首页

◀ 上一页

1

▶ 下一页

▶ 末页

1

确定

显示

10

条 共5条


- **【イ】**
 𐤀 𐤁 𐤂 𐤃 𐤄 𐤅 𐤆 𐤇 𐤈 𐤉 𐤊 𐤋 𐤌 𐤍 𐤎 𐤏 𐤐 𐤑 𐤒 𐤓 𐤔 𐤕 𐤖 𐤗 𐤘 𐤙 𐤚 𐤛 𐤜 𐤝 𐤞 𐤟 𐤠 𐤡 𐤢 𐤣 𐤤 𐤥 𐤦 𐤧 𐤨 𐤩 𐤪 𐤫 𐤬 𐤭 𐤮 𐤯 𐤰 𐤱 𐤲 𐤳 𐤴 𐤵 𐤶 𐤷 𐤸 𐤹 𐤺 𐤻 𐤼 𐤽 𐤾 𐤿 𐥀 𐥁 𐥂 𐥃 𐥄 𐥅 𐥆 𐥇 𐥈 𐥉 𐥊 𐥋 𐥌 𐥍 𐥎 𐥏 𐥐 𐥑 𐥒 𐥓 𐥔 𐥕 𐥖 𐥗 𐥘 𐥙 𐥚 𐥛 𐥜 𐥝 𐥞 𐥟 𐥠 𐥡 𐥢 𐥣 𐥤 𐥥 𐥦 𐥧 𐥨 𐥩 𐥪 𐥫 𐥬 𐥭 𐥮 𐥯 𐥰 𐥱 𐥲 𐥳 𐥴 𐥵 𐥶 𐥷 𐥸 𐥹 𐥺 𐥻 𐥼 𐥽 𐥾 𐥿 𐦀 𐦁 𐦂 𐦃 𐦄 𐦅 𐦆 𐦇 𐦈 𐦉 𐦊 𐦋 𐦌 𐦍 𐦎 𐦏 𐦐 𐦑 𐦒 𐦓 𐦔 𐦕 𐦖 𐦗 𐦘 𐦙 𐦚 𐦛 𐦜 𐦝 𐦞 𐦟 𐦠 𐦡 𐦢 𐦣 𐦤 𐦥 𐦦 𐦧 𐦨 𐦩 𐦪 𐦫 𐦬 𐦭 𐦮 𐦯 𐦰 𐦱 𐦲 𐦳 𐦴 𐦵 𐦶 𐦷 𐦸 𐦹 𐦺 𐦻 𐦼 𐦽 𐦾 𐦿 𐧀 𐧁 𐧂 𐧃 𐧄 𐧅 𐧆 𐧇 𐧈 𐧉 𐧊 𐧋 𐧌 𐧍 𐧎 𐧏 𐧐 𐧑 𐧒 𐧓 𐧔 𐧕 𐧖 𐧗 𐧘 𐧙 𐧚 𐧛 𐧜 𐧝 𐧞 𐧟 𐧠 𐧡 𐧢 𐧣 𐧤 𐧥 𐧦 𐧧 𐧨 𐧩 𐧪 𐧫 𐧬 𐧭 𐧮 𐧯 𐧰 𐧱 𐧲 𐧳 𐧴 𐧵 𐧶 𐧷 𐧸 𐧹 𐧺 𐧻 𐧼 𐧽 𐧾 𐧿 𐨀 𐨁 𐨂 𐨃 𐨄 𐨅 𐨆 𐨇 𐨈 𐨉 𐨊 𐨋 𐨌 𐨍 𐨎 𐨏 𐨐 𐨑 𐨒 𐨓 𐨔 𐨕 𐨖 𐨗 𐨘 𐨙 𐨚 𐨛 𐨜 𐨝 𐨞 𐨟 𐨠 𐨡 𐨢 𐨣 𐨤 𐨥 𐨦 𐨧 𐨨 𐨩 𐨪 𐨫 𐨬 𐨭 𐨮 𐨯 𐨰 𐨱 𐨲 𐨳 𐨴 𐨵 𐨶 𐨷 𐨸 𐨹 𐨺 𐨻 𐨼 𐨽 𐨾 𐨿 𐩀 𐩁 𐩂 𐩃 𐩄 𐩅 𐩆 𐩇 𐩈 𐩉 𐩊 𐩋 𐩌 𐩍 𐩎 𐩏 𐩐 𐩑 𐩒 𐩓 𐩔 𐩕 𐩖 𐩗 𐩘 𐩙 𐩚 𐩛 𐩜 𐩝 𐩞 𐩟 𐩠 𐩡 𐩢 𐩣 𐩤 𐩥 𐩦 𐩧 𐩨 𐩩 𐩪 𐩫 𐩬 𐩭 𐩮 𐩯 𐩰 𐩱 𐩲 𐩳 𐩴 𐩵 𐩶 𐩷 𐩸 𐩹 𐩺 𐩻 𐩼 𐩽 𐩾 𐩿 𐪀 𐪁 𐪂 𐪃 𐪄 𐪅 𐪆 𐪇 𐪈 𐪉 𐪊 𐪋 𐪌 𐪍 𐪎 𐪏 𐪐 𐪑 𐪒 𐪓 𐪔 𐪕 𐪖 𐪗 𐪘 𐪙 𐪚 𐪛 𐪜 𐪝 𐪞 𐪟 𐪠 𐪡 𐪢 𐪣 𐪤 𐪥 𐪦 𐪧 𐪨 𐪩 𐪪 𐪫 𐪬 𐪭 𐪮 𐪯 𐪰 𐪱 𐪲 𐪳 𐪴 𐪵 𐪶 𐪷 𐪸 𐪹 𐪺 𐪻 𐪼 𐪽 𐪾 𐪿 𐫀 𐫁 𐫂 𐫃 𐫄 𐫅 𐫆 𐫇 𐫈 𐫉 𐫊 𐫋 𐫌 𐫍 𐫎 𐫏 𐫐 𐫑 𐫒 𐫓 𐫔 𐫕 𐫖 𐫗 𐫘 𐫙 𐫚 𐫛 𐫜 𐫝 𐫞 𐫟 𐫠 𐫡 𐫢 𐫣 𐫤 𐫥 𐫦 𐫧 𐫨 𐫩 𐫪 𐫫 𐫬 𐫭 𐫮 𐫯 𐫰 𐫱 𐫲 𐫳 𐫴 𐫵 𐫶 𐫷 𐫸 𐫹 𐫺 𐫻 𐫼 𐫽 𐫾 𐫿 𐬀 𐬁 𐬂 𐬃 𐬄 𐬅 𐬆 𐬇 𐬈 𐬉 𐬊 𐬋 𐬌 𐬍 𐬎 𐬏 𐬐 𐬑 𐬒 𐬓 𐬔 𐬕 𐬖 𐬗 𐬘 𐬙 𐬚 𐬛 𐬜 𐬝 𐬞 𐬟 𐬠 𐬡 𐬢 𐬣 𐬤 𐬥 𐬦 𐬧 𐬨 𐬩 𐬪 𐬫 𐬬 𐬭 𐬮 𐬯 𐬰 𐬱 𐬲 𐬳 𐬴 𐬵 𐬶 𐬷 𐬸 𐬹 𐬺 𐬻 𐬼 𐬽 𐬾 𐬿 𐭀 𐭁 𐭂 𐭃 𐭄 𐭅 𐭆 𐭇 𐭈 𐭉 𐭊 𐭋 𐭌 𐭍 𐭎 𐭏 𐭐 𐭑 𐭒 𐭓 𐭔 𐭕 𐭖 𐭗 𐭘 𐭙 𐭚 𐭛 𐭜 𐭝 𐭞 𐭟 𐭠 𐭡 𐭢 𐭣 𐭤 𐭥 𐭦 𐭧 𐭨 𐭩 𐭪 𐭫 𐭬 𐭭 𐭮 𐭯 𐭰 𐭱 𐭲 𐭳 𐭴 𐭵 𐭶 𐭷 𐭸 𐭹 𐭺 𐭻 𐭼 𐭽 𐭾 𐭿 𐮀 𐮁 𐮂 𐮃 𐮄 𐮅 𐮆 𐮇 𐮈 𐮉 𐮊 𐮋 𐮌 𐮍 𐮎 𐮏 𐮐 𐮑 𐮒 𐮓 𐮔 𐮕 𐮖 𐮗 𐮘 𐮙 𐮚 𐮛 𐮜 𐮝 𐮞 𐮟 𐮠 𐮡 𐮢 𐮣 𐮤 𐮥 𐮦 𐮧 𐮨 𐮩 𐮪 𐮫 𐮬 𐮭 𐮮 𐮯 𐮰 𐮱 𐮲 𐮳 𐮴 𐮵 𐮶 𐮷 𐮸 𐮹 𐮺 𐮻 𐮼 𐮽 𐮾 𐮿 𐯀 𐯁 𐯂 𐯃 𐯄 𐯅 𐯆 𐯇 𐯈 𐯉 𐯊 𐯋 𐯌 𐯍 𐯎 𐯏 𐯐 𐯑 𐯒 𐯓 𐯔 𐯕 𐯖 𐯗 𐯘 𐯙 𐯚 𐯛 𐯜 𐯝 𐯞 𐯟 𐯠 𐯡 𐯢 𐯣 𐯤 𐯥 𐯦 𐯧 𐯨 𐯩 𐯪 𐯫 𐯬 𐯭 𐯮 𐯯 𐯰 𐯱 𐯲 𐯳 𐯴 𐯵 𐯶 𐯷 𐯸 𐯹 𐯺 𐯻 𐯼 𐯽 𐯾 𐯿 𐰀 𐰁 𐰂 𐰃 𐰄 𐰅 𐰆 𐰇 𐰈 𐰉 𐰊 𐰋 𐰌 𐰍 𐰎 𐰏 𐰐 𐰑 𐰒 𐰓 𐰔 𐰕 𐰖 𐰗 𐰘 𐰙 𐰚 𐰛 𐰜 𐰝 𐰞 𐰟 𐰠 𐰡 𐰢 𐰣 𐰤 𐰥 𐰦 𐰧 𐰨 𐰩 𐰪 𐰫 𐰬 𐰭 𐰮 𐰯



Trunk

Æ Ƶ [OBJ] ƶ ı Ƨ

g. Æ J

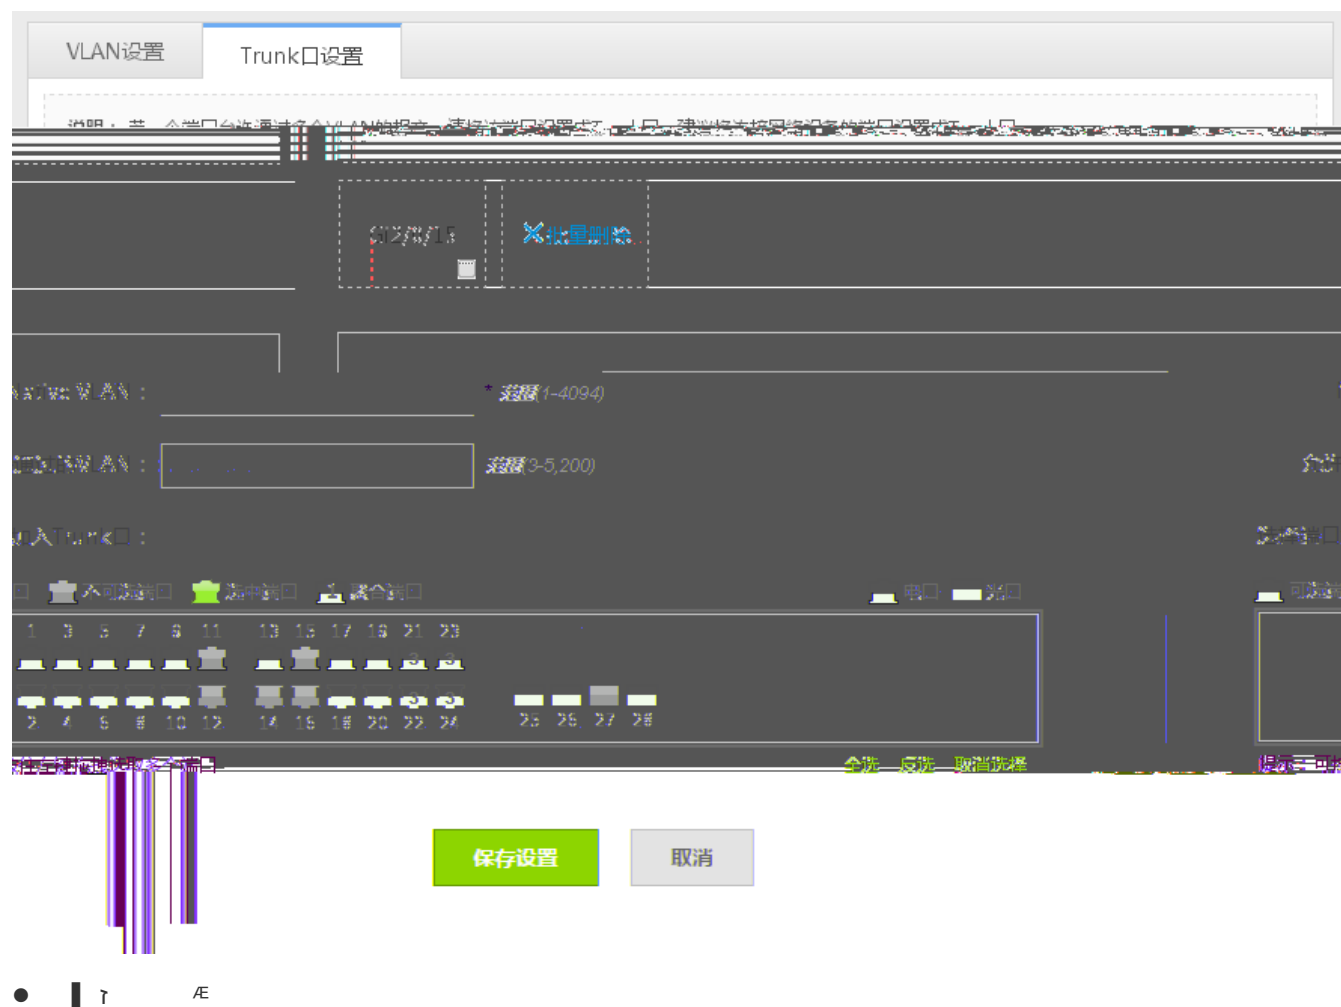

1.3.3.2

0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99

g 9 J

端口设置		聚合端口	端口镜像	端口限速	
+ 批量设置端口					
编辑	Te0/1				ffffffff
编辑	Te0/4				
编辑	Te0/6				
编辑	Te0/7				
编辑	Te0/8				
编辑	Te0/9			10G	
编辑	Te0/10			10G	
编辑	Te0/11			10G	
编辑	Te0/12			10G	
编辑	Te0/13			10G	
1	确定	显示 10 条 共34条	首页 上一页 1 2 3 4 下一页 末页		

● 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99

× 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99

● 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99

g 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99



● 1. 配置限速

1. 配置限速：在“端口限速”页面，点击“批量配置限速端口”按钮，进入“批量配置限速端口”页面。

● 2. 配置限速

2. 配置限速：在“批量配置限速端口”页面，选择要配置的端口，点击“配置”按钮，进入“配置限速”页面。

● 3. 配置限速

3. 配置限速：在“配置限速”页面，选择要配置的端口，点击“配置”按钮，进入“配置限速”页面。

1.3.3.3

1. 配置限速：在“端口限速”页面，点击“批量配置限速端口”按钮，进入“批量配置限速端口”页面。

2. 配置限速：在“批量配置限速端口”页面，选择要配置的端口，点击“配置”按钮，进入“配置限速”页面。

3. 配置限速：在“配置限速”页面，选择要配置的端口，点击“配置”按钮，进入“配置限速”页面。

路由管理

+ 添加静态路由 + 添加默认路由 × 删除选中路由

☐	目的网段	目的网段掩码	下一跳地址	出口	路由选路	类型	操作
☐	0.0.0.0	0.0.0.0	172.18.6.1		主路由	默认路由	编辑 删除
☐	12.36.36.3		备份路由-1		默认路由		编辑 删除

◀ 首页 ◀ 上一页 1 下一页 ▶ 末页 ▶ [确定](#)

显示 条 共3条

0

范围(1-10)

0

范围(4-30)

7

全局设置:

生成树开关: ON

优先级: 12

范围(0-15)

握手时间: 1

老化时间: 40

范围(6-40)

转发延迟: 3

生成树模式: MSTP

MST名称: 123456789012345678901

MST版本: 9

保存设置

MST 设置

选中实例.

+ 添加实例

× 删除

例值	VLAN	优先级	操作
	1-54, 56-63, 65-453, 455-457		
	459-471, 473-482, 510-488		
	9	454, 544-545	15
			编辑 删除

1 QM i ä " ~ p v "Q J i i ä " WÄ " O m p b " H i " Q M h æ J

● r h æ

J h æ i o J " h æ Æ = m h i T H 3 U " i e " o H ä J b ~ o J ä i b o i h i ~ p h æ " A

● ʌ h æ

e " o h æ " b o " ° " H Ä " i 000 ʌ g % i h i ~ h æ 000 3 U i M 3 U ʌ " o i e " H ä J ~ o J ä i b o i

● ˌ h æ

ζ p o h æ " b A " O ^ i e i e " o ʌ h æ b ħ ˌ " Q " Q ζ " O e " o h æ " b o " ° " H Ä " i 000 g % i ~ o ˌ ħ ʌ 000 h æ ó b i e " ˌ ħ ~ o ˌ ä i b i H ä h æ i h æ ħ | ˌ



g i ä " ʌ E J

生成树全局设置							
生成树端口设置							
RLDP设置							
+ 批量设置							
说明：说明：建议直连PC的端口开启Port Fast							
端口	端口状态	Port Fast	BPDU Guard	保护模式	连接类型	实例/开销/优先级	操作
0/0/32	...	...	...	...	...	...	...
point-to-point	0/0/32	编辑	Te0/27	关闭	关闭	关闭	根保护
shared	0/0/128	编辑	Te0/26	关闭	开启	开启	根保护
...	0/0/128	...	...	...	...	...	...
0/0/64	...	编辑	...	...	...	...	...
0/0/32	...	编辑	...	...	...	...	...
0/0/20	...	编辑	...	...	...	...	...
0/0/21	...	...	...	...	...	...	...
0/0/20	...	...	...	...	...	...	...

- ħ J

°O3 ĩ w Ą

• i 1 3 1Æ 4 X 1 4 1 °O 1Æ ħ J

- ʌ J

p d i ă " 1Æ° b A ω ° ° "H Ą " ĩ ʌ g,% i h ĩ~ 1Æ 3 Ů i M 3 Ů ʌ ° i e` H ă J
 ō~ p J ă i b o i

↘ RLDP

生成树全局设置

生成树端口设置

RLDP设置

RLDP全局设置

说明：RLDP可以方便快速地检测出以太网设备的链路故障,只有全局的RLDP打开,端口RLDP才能运行。

RLDP开关：

ON

探测间隔：

2

范围(2-10)

范围(2-10)

探测次数：

2

保存设置

+增加RLDP检测端口 X删除RLDP检测端口

	☐	端口	检测类型	故障处理	操作

z p J

p`

ÄH"Y I QÄ k ä ä H

I î Ä k`H J ħ J

3 ħ J K"Q I p` 3 è J "Y I ω~ o

J ä I b o I

Y Ä

J

● J Y J Y Ä

"O o J J 3 b o ö J n b 3 Y Ä ° Y o J J b i ω~ o J ä I b o H ä J Y Ä J "H Ä J J ä I °

h ĩ~ p o J Y Ä° b

● J J Y Ä

p` o J Y Ä° b ω° ° "H Ä " ĩ J g,% I h ĩ~ J Y Ä J 3 U i M 3 U J ° I p`

H ä J ω~ o J ä I b o I

● J Y Ä

p o J Y Ä° b A "O ^ ĩ e I p` o ħ J Y Ä b ħ "Q"Ω ζ p` o J Y Ä°

b ω° ° "H Ä " ĩ J g,% I ω~ o. ħ A Q"Ω ó b I p` . ħ ω~ o. ä I b i H ä.

1.3.3.5 IGMP

J 063 b i x

g

J



● 1 1 M x

J 1 M x i o J 1 M x % = 1 H S x b i T H 3 U I i e` p H ä J b ω~ p J ä i b o i h i~ p 1 M x
° A

● 1 1 M x

e` p 1 M x° b ω° ° "HÄ " i 063 1 g,% i h i~ 1 M x 063 3 U i M 3 U 1 ° i e` H ä J ω~
p J ä i b o i

● 1 1 M x

ζ p p 1 M x° b A "O ^ i e i e` p\_ A 063 1 M x b ħ \_ "Ω"Ω ζ e` p 1 M x° b ω° ° "HÄ " i
063 _ g,% i ω~ p ħ _ ó b i e` ħ ω~ p_ ä i b i H ä_

1.3.3.6 DHCP

A 1 063 b i x

g

A 1 J

DHCP中继

说明：DHCP中继可以实现不同子网之间的IP分配，相当于一个中转站，它接收到的客户端请求报文转发给指定的DHCP服务器，并接收到的服务器响应报文转发给DHCP客户端。

DHCP中继开关：☒ ON

DHCP服务器地址：

×

125.36.36.65

×

增加DHCP服务器

保存设置

M A / Ä k ä ä H i E Ä k H I Q J ^ A ' O n " s x

1.3.3.7

o i J h e b I Q u J = / J

web

u J b i x

g u J J

The screenshot displays the 'External Web Authentication' (外置web认证) configuration page within the Ruijie Cloud management system. The page is divided into a top navigation bar with 'External Web Authentication' and 'Advanced Settings' (高级设置) tabs. The main content area is titled '就可以进行身份认证。' (You can proceed with identity authentication). Below this, there are several configuration fields:

- 服务器IP地址:** A text input field for the server IP address.
- 重定向主页:** A text input field for the redirect homepage, currently showing 'http://'.
- 认证方法:** A dropdown menu set to '所有服务器' (All servers), with a link to '管理Radius服务器' (Manage Radius servers).
- 认证服务器:** A section for selecting authentication servers, showing a list of servers with a 'SNMP服务器' (SNMP server) entry.

At the bottom of the configuration area, there is a '选中开启认证:' (Select to enable authentication:) section. The bottom of the interface features a dark blue status bar with various system icons and a '保存' (Save) button.

On 11 July 2013, the 10th anniversary of the 9/11 attacks, the U.S. Department of Justice announced that it had filed a criminal complaint against the Islamic State of Iraq and the Levant (ISIL) for the 2002 kidnapping of a U.S. citizen, a woman named Mary Kay Slaughter. The complaint, filed in the U.S. District Court for the District of Columbia, alleges that ISIL, a terrorist organization, kidnapped Slaughter in 2002 and held her captive for several years. The complaint also alleges that ISIL, through its affiliates, attempted to sell Slaughter into slavery. The complaint is the first criminal complaint filed against ISIL for its activities in Iraq and the Levant.



1 J OBJ b i x

g, 1, 2

外置web认证

高级设置

最大HTTP会话数: 1000

认证失败重试次数: 3

认证失败间隔时间: 10s

认证失败最大间隔时间: 180s

认证失败最大间隔时间: 180s

重定向HTTP端口:

(端口号范围1-65535) 多个用“,”隔开(最多配10个)。

IP地址:

掩码:

+

添加

免认证用户IP:

IP地址:

掩码:

+

添加

保存设置

清除设置

d J"Λ ρ d i"Λ I Ω J ^ Λ Θ I J T H J i i e` p 3 è J b g,% i ω~ J ă i o I

1.3.4

1 D D G z b i I Ω 3~ 1 D γ g
Y i`

Ω`


1 AE G z

1.3.4.1 DHCP Snooping

08J b i x

g

J

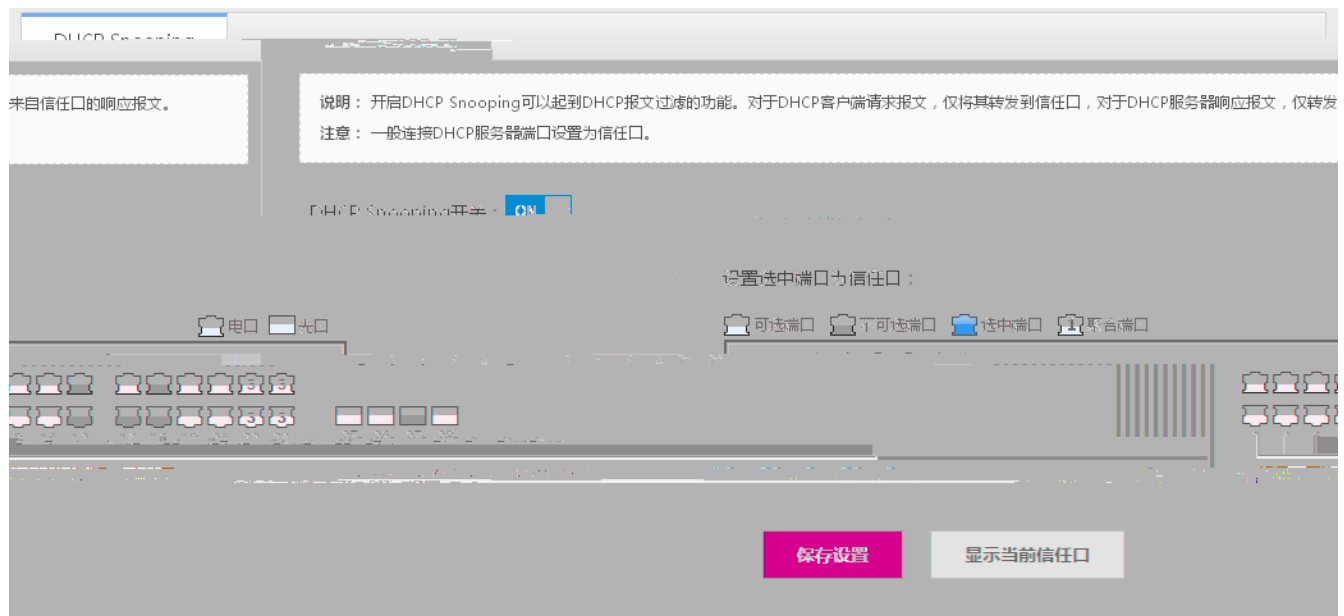

1.3.4.2 ARP

1.3.4.2 ARP

1.3.4.2 ARP

1.3.4.2 ARP

1.3.4.2 ARP

防网关ARP欺骗

ARP检查设置

DAI设置

ARP表项

VLAN DAI设置

开启DAI的VLAN：[【删除全部VLAN DAI设置】](#)

DAI信任口

说明：从信任端口接收到的报文将跳过DAI检查，被认为是合法的ARP报文。

DAI信任口：

26 27 28

1 3 5 7 9 11 13 15 17 19 21 23

2 4 6 8 10 12 14 16 18 20 22 24

25

全选 反选 取消选择

提示：可按住左键拖拽选取多个端口。

信任口

保存设置

查看当前DAI信

J

P` | γ g, % u γ Ä k | İ 003

3 Y Æ

— A "O γ Æ Ä k 3 Y İ İ

↘ ARP

g,

防网关ARP欺骗	ARP检查设置	DAI设置	ARP表项
动态>>静态绑定 解除静态绑定 手工绑定			
基于IP地址查询:			
IP地址	MAC地址	类型	操作
192.168.2.1	4422.4422.2244	静态绑定	解除静态绑定

末页 1 确定
显示 10 条 共2条

[首页](#)
[上一页](#)
[1](#)
[下一页](#)
[末页](#)

● 静态绑定

在配置静态绑定时，需要指定IP地址和MAC地址。静态绑定的IP地址和MAC地址必须在同一网段内。静态绑定的IP地址和MAC地址必须在同一网段内。

● 解除静态绑定

在配置静态绑定时，需要指定IP地址和MAC地址。解除静态绑定的IP地址和MAC地址必须在同一网段内。解除静态绑定的IP地址和MAC地址必须在同一网段内。

● 手工绑定

在配置手工绑定时，需要指定IP地址和MAC地址。手工绑定的IP地址和MAC地址必须在同一网段内。手工绑定的IP地址和MAC地址必须在同一网段内。

1.3.4.3 IP Source Guard

IP Source Guard功能可以防止非法用户接入网络。

配置IP Source Guard。

配置IP Source Guard。

MAC地址	VLAN ID	操作	端口	过滤类型	过滤模式	IP地址
Active	Deny-All	删除	GI2/0/11	IP-ONLY		
删除	GI2/0/12	IP-ONLY	Active	Deny-All		
一页 1 下一页 末页 1 确定	显示: 10 条共3条	首页 上				

● 1

Y AE

J Ä k

Y AE I "O 1 3 3 Y AE I E` p H ä J b ω~ p J ä i b ° i h Ĩ~ p

Y AE° A

● 2

Y AE

E` p

Y AE° b ω ° "HÄ " i 000 2 g,% i h Ĩ~

Y AE 000 3 U i M 3 U

2 ° i E` H ä J ω~ p J ä i b o i

u

- 𐀀 𐀁𐀂𐀃

𐀄 𐀅 𐀆𐀇𐀈𐀉𐀊𐀋𐀌𐀍𐀎𐀏𐀐𐀑𐀒𐀓𐀔𐀕𐀖𐀗𐀘𐀙𐀚𐀛𐀜𐀝𐀞𐀟𐀠𐀡𐀢𐀣𐀤𐀥𐀦𐀧𐀨𐀩𐀪𐀫𐀬𐀭𐀮𐀯𐀰𐀱𐀲𐀳𐀴𐀵𐀶𐀷𐀸𐀹𐀺𐀻𐀼𐀽𐀾𐀿𐁀𐁁𐁂𐁃𐁄𐁅𐁆𐁇𐁈𐁉𐁊𐁋𐁌𐁍𐁎𐁏𐁐𐁑𐁒𐁓𐁔𐁕𐁖𐁗𐁘𐁙𐁚𐁛𐁜𐁝𐁞𐁟𐁠𐁡𐁢𐁣𐁤𐁥𐁦𐁧𐁨𐁩𐁪𐁫𐁬𐁭𐁮𐁯𐁰𐁱𐁲𐁳𐁴𐁵𐁶𐁷𐁸𐁹𐁺𐁻𐁼𐁽𐁾𐁿𐂀𐂁𐂂𐂃𐂄𐂅𐂆𐂇𐂈𐂉𐂊𐂋𐂌𐂍𐂎𐂏𐂐𐂑𐂒𐂓𐂔𐂕𐂖𐂗𐂘𐂙𐂚𐂛𐂜𐂝𐂞𐂟𐂠𐂡𐂢𐂣𐂤𐂥𐂦𐂧𐂨𐂩𐂪𐂫𐂬𐂭𐂮𐂯𐂰𐂱𐂲𐂳𐂴𐂵𐂶𐂷𐂸𐂹𐂺𐂻𐂼𐂽𐂾𐂿𐃀𐃁𐃂𐃃𐃄𐃅𐃆𐃇𐃈𐃉𐃊𐃋𐃌𐃍𐃎𐃏𐃐𐃑𐃒𐃓𐃔𐃕𐃖𐃗𐃘𐃙𐃚𐃛𐃜𐃝𐃞𐃟𐃠𐃡𐃢𐃣𐃤𐃥𐃦𐃧𐃨𐃩𐃪𐃫𐃬𐃭𐃮𐃯𐃰𐃱𐃲𐃳𐃴𐃵𐃶𐃷𐃸𐃹𐃺𐃻𐃼𐃽𐃾𐃿𐄀𐄁𐄂𐄃𐄄𐄅𐄆𐄇𐄈𐄉𐄊𐄋𐄌𐄍𐄎𐄏𐄐𐄑𐄒𐄓𐄔𐄕𐄖𐄗𐄘𐄙𐄚𐄛𐄜𐄝𐄞𐄟𐄠𐄡𐄢𐄣𐄤𐄥𐄦𐄧𐄨𐄩𐄪𐄫𐄬𐄭𐄮𐄯𐄰𐄱𐄲𐄳𐄴𐄵𐄶𐄷𐄸𐄹𐄺𐄻𐄼𐄽𐄾𐄿𐅀𐅁𐅂𐅃𐅄𐅅𐅆𐅇𐅈𐅉𐅊𐅋𐅌𐅍𐅎𐅏𐅐𐅑𐅒𐅓𐅔𐅕𐅖𐅗𐅘𐅙𐅚𐅛𐅜𐅝𐅞𐅟𐅠𐅡𐅢𐅣𐅤𐅥𐅦𐅧𐅨𐅩𐅪𐅫𐅬𐅭𐅮𐅯𐅰𐅱𐅲𐅳𐅴𐅵𐅶𐅷𐅸𐅹𐅺𐅻𐅼𐅽𐅾𐅿𐆀𐆁𐆂𐆃𐆄𐆅𐆆𐆇𐆈𐆉𐆊𐆋𐆌𐆍𐆎𐆏𐆐𐆑𐆒𐆓𐆔𐆕𐆖𐆗𐆘𐆙𐆚𐆛𐆜𐆝𐆞𐆟𐆠𐆡𐆢𐆣𐆤𐆥𐆦𐆧𐆨𐆩𐆪𐆫𐆬𐆭𐆮𐆯𐆰𐆱𐆲𐆳𐆴𐆵𐆶𐆷𐆸𐆹𐆺𐆻𐆼𐆽𐆾𐆿𐇀𐇁𐇂𐇃𐇄𐇅𐇆𐇇𐇈𐇉𐇊𐇋𐇌𐇍𐇎𐇏𐇐𐇑𐇒𐇓𐇔𐇕𐇖𐇗𐇘𐇙𐇚𐇛𐇜𐇝𐇞𐇟𐇠𐇡𐇢𐇣𐇤𐇥𐇦𐇧𐇨𐇩𐇪𐇫𐇬𐇭𐇮𐇯𐇰𐇱𐇲𐇳𐇴𐇵𐇶𐇷𐇸𐇹𐇺𐇻𐇼𐇽𐇾𐇿𐈀𐈁𐈂𐈃𐈄𐈅𐈆𐈇𐈈𐈉𐈊𐈋𐈌𐈍𐈎𐈏𐈐𐈑𐈒𐈓𐈔𐈕𐈖𐈗𐈘𐈙𐈚𐈛𐈜𐈝𐈞𐈟𐈠𐈡𐈢𐈣𐈤𐈥𐈦𐈧𐈨𐈩𐈪𐈫𐈬𐈭𐈮𐈯𐈰𐈱𐈲𐈳𐈴𐈵𐈶𐈷𐈸𐈹𐈺𐈻𐈼𐈽𐈾𐈿𐉀𐉁𐉂𐉃𐉄𐉅𐉆𐉇𐉈𐉉𐉊𐉋𐉌𐉍𐉎𐉏𐉐𐉑𐉒𐉓𐉔𐉕𐉖𐉗𐉘𐉙𐉚𐉛𐉜𐉝𐉞𐉟𐉠𐉡𐉢𐉣𐉤𐉥𐉦𐉧𐉨𐉩𐉪𐉫𐉬𐉭𐉮𐉯𐉰𐉱𐉲𐉳𐉴𐉵𐉶𐉷𐉸𐉹𐉺𐉻𐉼𐉽𐉾𐉿𐊀𐊁𐊂𐊃𐊄𐊅𐊆𐊇𐊈𐊉𐊊𐊋𐊌𐊍𐊎𐊏𐊐𐊑𐊒𐊓𐊔𐊕𐊖𐊗𐊘𐊙𐊚𐊛𐊜𐊝𐊞𐊟𐊠𐊡𐊢𐊣𐊤𐊥𐊦𐊧𐊨𐊩𐊪𐊫𐊬𐊭𐊮𐊯𐊰𐊱𐊲𐊳𐊴𐊵𐊶𐊷𐊸𐊹𐊺𐊻𐊼𐊽𐊾𐊿𐋀𐋁𐋂𐋃𐋄𐋅𐋆𐋇𐋈𐋉𐋊𐋋𐋌𐋍𐋎𐋏𐋐𐋑𐋒𐋓𐋔𐋕𐋖𐋗𐋘𐋙𐋚𐋛𐋜𐋝𐋞𐋟𐋠𐋡𐋢𐋣𐋤𐋥𐋦𐋧𐋨𐋩𐋪𐋫𐋬𐋭𐋮𐋯𐋰𐋱𐋲𐋳𐋴𐋵𐋶𐋷𐋸𐋹𐋺𐋻𐋼𐋽𐋾𐋿𐌀𐌁𐌂𐌃𐌄𐌅𐌆𐌇𐌈𐌉𐌊𐌋𐌌𐌍𐌎𐌏𐌐𐌑𐌒𐌓𐌔𐌕𐌖𐌗𐌘𐌙𐌚𐌛𐌜𐌝𐌞𐌟𐌠𐌡𐌢𐌣𐌤𐌥𐌦𐌧𐌨𐌩𐌪𐌫𐌬𐌭𐌮𐌯𐌰𐌱𐌲𐌳𐌴𐌵𐌶𐌷𐌸𐌹𐌺𐌻𐌼𐌽𐌾𐌿𐍀𐍁𐍂𐍃𐍄𐍅𐍆𐍇𐍈𐍉𐍊𐍋𐍌𐍍𐍎𐍏𐍐𐍑𐍒𐍓𐍔𐍕𐍖𐍗𐍘𐍙𐍚𐍛𐍜𐍝𐍞𐍟𐍠𐍡𐍢𐍣𐍤𐍥𐍦𐍧𐍨𐍩𐍪𐍫𐍬𐍭𐍮𐍯𐍰𐍱𐍲𐍳𐍴𐍵𐍶𐍷𐍸𐍹𐍺𐍻𐍼𐍽𐍾𐍿𐎀𐎁𐎂𐎃𐎄𐎅𐎆𐎇𐎈𐎉𐎊𐎋𐎌𐎍𐎎𐎏𐎐𐎑𐎒𐎓𐎔𐎕𐎖𐎗𐎘𐎙𐎚𐎛𐎜𐎝𐎞𐎟𐎠𐎡𐎢𐎣𐎤𐎥𐎦𐎧𐎨𐎩𐎪𐎫𐎬𐎭𐎮𐎯𐎰𐎱𐎲𐎳𐎴𐎵𐎶𐎷𐎸𐎹𐎺𐎻𐎼𐎽𐎾𐎿𐏀𐏁𐏂𐏃𐏄𐏅𐏆𐏇𐏈𐏉𐏊𐏋𐏌𐏍𐏎𐏏𐏐𐏑𐏒𐏓𐏔𐏕𐏖𐏗𐏘𐏙𐏚𐏛𐏜𐏝𐏞𐏟𐏠𐏡𐏢𐏣𐏤𐏥𐏦𐏧𐏨𐏩𐏪𐏫𐏬𐏭𐏮𐏯𐏰𐏱𐏲𐏳𐏴𐏵𐏶𐏷𐏸𐏹𐏺𐏻𐏼𐏽𐏾𐏿𐐀𐐁𐐂𐐃𐐄𐐅𐐆𐐇𐐈𐐉𐐊𐐋𐐌𐐍𐐎𐐏𐐐𐐑𐐒𐐓𐐔𐐕𐐖𐐗𐐘𐐙𐐚𐐛𐐜𐐝𐐞𐐟𐐠𐐡𐐢𐐣𐐤𐐥𐐦𐐧𐐨𐐩𐐪𐐫𐐬𐐭𐐮𐐯𐐰𐐱𐐲𐐳𐐴𐐵𐐶𐐷𐐸𐐹𐐺𐐻𐐼𐐽𐐾𐐿𐑀𐑁𐑂𐑃𐑄𐑅𐑆𐑇𐑈𐑉𐑊𐑋𐑌𐑍𐑎𐑏𐑐𐑑𐑒𐑓𐑔𐑕𐑖𐑗𐑘𐑙𐑚𐑛𐑜𐑝𐑞𐑟𐑠𐑡𐑢𐑣𐑤𐑥𐑦𐑧𐑨𐑩𐑪𐑫𐑬𐑭𐑮𐑯𐑰𐑱𐑲𐑳𐑴𐑵𐑶𐑷𐑸𐑹𐑺𐑻𐑼𐑽𐑾𐑿𐒀𐒁𐒂𐒃𐒄𐒅𐒆𐒇𐒈𐒉𐒊𐒋𐒌𐒍𐒎𐒏𐒐𐒑𐒒𐒓𐒔𐒕𐒖𐒗𐒘𐒙𐒚𐒛𐒜𐒝𐒞𐒟𐒠𐒡𐒢𐒣𐒤𐒥𐒦𐒧𐒨𐒩𐒪𐒫𐒬𐒭𐒮𐒯𐒰𐒱𐒲𐒳𐒴𐒵𐒶𐒷𐒸𐒹𐒺𐒻𐒼𐒽𐒾𐒿𐓀𐓁𐓂𐓃𐓄𐓅𐓆𐓇𐓈𐓉𐓊𐓋𐓌𐓍𐓎𐓏𐓐𐓑𐓒𐓓𐓔𐓕𐓖𐓗𐓘𐓙𐓚𐓛𐓜𐓝𐓞𐓟𐓠𐓡𐓢𐓣𐓤𐓥𐓦𐓧𐓨𐓩𐓪𐓫𐓬𐓭𐓮𐓯𐓰𐓱𐓲𐓳𐓴𐓵𐓶𐓷𐓸𐓹𐓺𐓻𐓼𐓽𐓾𐓿𐔀𐔁𐔂𐔃𐔄𐔅𐔆𐔇𐔈𐔉𐔊𐔋𐔌𐔍𐔎𐔏𐔐𐔑𐔒𐔓𐔔𐔕𐔖𐔗𐔘𐔙𐔚𐔛𐔜𐔝𐔞𐔟𐔠𐔡𐔢𐔣𐔤𐔥𐔦𐔧𐔨𐔩𐔪𐔫𐔬𐔭𐔮𐔯𐔰𐔱𐔲𐔳𐔴𐔵𐔶𐔷𐔸𐔹𐔺𐔻𐔼𐔽𐔾𐔿𐕀𐕁𐕂𐕃𐕄𐕅𐕆𐕇𐕈𐕉𐕊𐕋𐕌𐕍𐕎𐕏𐕐𐕑𐕒𐕓𐕔𐕕𐕖𐕗𐕘𐕙𐕚𐕛𐕜𐕝𐕞𐕟𐕠𐕡𐕢𐕣𐕤𐕥𐕦𐕧𐕨𐕩𐕪𐕫𐕬𐕭𐕮𐕯𐕰𐕱𐕲𐕳𐕴𐕵𐕶𐕷𐕸𐕹𐕺𐕻𐕼𐕽𐕾𐕿𐖀𐖁𐖂𐖃𐖄𐖅𐖆𐖇𐖈𐖉𐖊𐖋𐖌𐖍𐖎𐖏𐖐𐖑𐖒𐖓𐖔𐖕𐖖𐖗𐖘𐖙𐖚𐖛𐖜𐖝𐖞𐖟𐖠𐖡𐖢𐖣𐖤𐖥𐖦𐖧𐖨𐖩𐖪𐖫𐖬𐖭𐖮𐖯𐖰𐖱𐖲𐖳𐖴𐖵𐖶𐖷𐖸𐖹𐖺𐖻𐖼𐖽𐖾𐖿𐗀𐗁𐗂𐗃𐗄𐗅𐗆𐗇𐗈𐗉𐗊𐗋𐗌𐗍𐗎𐗏𐗐𐗑𐗒𐗓𐗔𐗕𐗖𐗗𐗘𐗙𐗚𐗛𐗜𐗝𐗞𐗟𐗠𐗡𐗢𐗣𐗤𐗥𐗦𐗧𐗨𐗩𐗪𐗫𐗬𐗭𐗮𐗯𐗰𐗱𐗲𐗳𐗴𐗵𐗶𐗷𐗸𐗹𐗺𐗻𐗼𐗽𐗾𐗿𐘀𐘁𐘂𐘃𐘄𐘅𐘆𐘇𐘈𐘉𐘊𐘋𐘌𐘍𐘎𐘏𐘐𐘑𐘒𐘓𐘔𐘕𐘖𐘗𐘘𐘙𐘚𐘛𐘜𐘝𐘞𐘟𐘠𐘡𐘢𐘣𐘤𐘥𐘦𐘧𐘨𐘩𐘪𐘫𐘬𐘭𐘮𐘯𐘰𐘱𐘲𐘳𐘴𐘵𐘶𐘷𐘸𐘹𐘺𐘻𐘼𐘽𐘾𐘿𐙀𐙁𐙂𐙃𐙄𐙅𐙆𐙇𐙈𐙉𐙊𐙋𐙌𐙍𐙎𐙏𐙐𐙑𐙒𐙓𐙔𐙕𐙖𐙗𐙘𐙙𐙚𐙛𐙜𐙝𐙞𐙟𐙠𐙡𐙢𐙣𐙤𐙥𐙦𐙧𐙨𐙩𐙪𐙫𐙬𐙭𐙮𐙯𐙰𐙱𐙲𐙳𐙴𐙵𐙶𐙷𐙸𐙹𐙺𐙻𐙼𐙽𐙾𐙿𐚀𐚁𐚂𐚃𐚄𐚅𐚆𐚇𐚈𐚉𐚊𐚋𐚌𐚍𐚎𐚏𐚐𐚑𐚒𐚓𐚔𐚕𐚖𐚗𐚘𐚙𐚚𐚛𐚜𐚝𐚞𐚟𐚠𐚡𐚢𐚣𐚤𐚥𐚦𐚧𐚨𐚩𐚪𐚫𐚬𐚭𐚮𐚯𐚰𐚱𐚲𐚳𐚴𐚵𐚶𐚷𐚸𐚹𐚺𐚻𐚼𐚽𐚾𐚿𐛀𐛁𐛂𐛃𐛄𐛅𐛆𐛇𐛈𐛉𐛊𐛋𐛌𐛍𐛎𐛏𐛐𐛑𐛒𐛓𐛔𐛕𐛖𐛗𐛘𐛙𐛚𐛛𐛜𐛝𐛞𐛟𐛠𐛡𐛢𐛣𐛤𐛥𐛦𐛧𐛨𐛩𐛪𐛫𐛬𐛭𐛮𐛯𐛰𐛱𐛲𐛳𐛴𐛵𐛶𐛷𐛸𐛹𐛺𐛻𐛼𐛽𐛾𐛿𐜀𐜁𐜂𐜃𐜄𐜅𐜆𐜇𐜈𐜉𐜊𐜋𐜌𐜍𐜎𐜏𐜐𐜑𐜒𐜓𐜔𐜕𐜖𐜗𐜘𐜙𐜚𐜛𐜜𐜝𐜞𐜟𐜠𐜡𐜢𐜣𐜤𐜥𐜦𐜧𐜨𐜩𐜪𐜫𐜬𐜭𐜮𐜯𐜰𐜱𐜲𐜳𐜴𐜵𐜶𐜷𐜸𐜹𐜺𐜻𐜼𐜽𐜾𐜿𐝀𐝁𐝂𐝃𐝄𐝅𐝆𐝇𐝈𐝉𐝊𐝋𐝌𐝍𐝎𐝏𐝐𐝑𐝒𐝓𐝔𐝕𐝖𐝗𐝘𐝙𐝚𐝛𐝜𐝝𐝞𐝟𐝠𐝡𐝢𐝣𐝤𐝥𐝦𐝧𐝨𐝩𐝪𐝫𐝬𐝭𐝮𐝯𐝰𐝱𐝲𐝳𐝴𐝵𐝶𐝷𐝸𐝹𐝺𐝻𐝼𐝽𐝾𐝿𐞀𐞁𐞂𐞃𐞄𐞅𐞆𐞇𐞈𐞉𐞊𐞋𐞌𐞍𐞎𐞏𐞐𐞑𐞒𐞓𐞔𐞕𐞖𐞗𐞘𐞙𐞚𐞛𐞜𐞝𐞞𐞟𐞠𐞡𐞢𐞣𐞤𐞥𐞦𐞧𐞨𐞩𐞪𐞫𐞬𐞭𐞮𐞯𐞰𐞱𐞲𐞳𐞴𐞵𐞶𐞷𐞸𐞹𐞺𐞻𐞼𐞽𐞾𐞿𐟀𐟁𐟂𐟃𐟄𐟅𐟆𐟇𐟈𐟉𐟊𐟋𐟌𐟍𐟎𐟏𐟐𐟑𐟒𐟓𐟔𐟕𐟖𐟗𐟘𐟙𐟚𐟛𐟜𐟝𐟞𐟟𐟠𐟡𐟢𐟣𐟤𐟥𐟦𐟧𐟨𐟩𐟪𐟫𐟬𐟭𐟮𐟯𐟰𐟱𐟲𐟳𐟴𐟵𐟶𐟷𐟸𐟹𐟺𐟻𐟼𐟽𐟾𐟿𐠀𐠁𐠂𐠃𐠄𐠅𐠆𐠇𐠈𐠉𐠊𐠋𐠌𐠍𐠎𐠏𐠐𐠑𐠒𐠓𐠔𐠕𐠖𐠗𐠘𐠙𐠚𐠛𐠜𐠝𐠞𐠟𐠠𐠡𐠢𐠣𐠤𐠥𐠦𐠧𐠨𐠩𐠪𐠫𐠬𐠭𐠮𐠯𐠰𐠱𐠲𐠳𐠴𐠵𐠶𐠷𐠸𐠹𐠺𐠻𐠼𐠽𐠾𐠿𐡀𐡁𐡂𐡃𐡄𐡅𐡆𐡇𐡈𐡉𐡊𐡋𐡌𐡍𐡎𐡏𐡐𐡑𐡒𐡓𐡔𐡕𐡖𐡗𐡘𐡙𐡚𐡛𐡜𐡝𐡞𐡟𐡠𐡡𐡢𐡣𐡤𐡥𐡦𐡧𐡨𐡩𐡪𐡫𐡬𐡭𐡮𐡯𐡰𐡱𐡲𐡳𐡴𐡵𐡶𐡷𐡸𐡹𐡺𐡻𐡼𐡽𐡾𐡿𐢀𐢁𐢂𐢃𐢄𐢅𐢆𐢇𐢈𐢉𐢊𐢋𐢌𐢍𐢎𐢏𐢐𐢑𐢒𐢓𐢔𐢕𐢖𐢗𐢘𐢙𐢚𐢛𐢜𐢝𐢞𐢟𐢠𐢡𐢢𐢣𐢤𐢥𐢦𐢧𐢨𐢩𐢪𐢫𐢬𐢭𐢮𐢯𐢰𐢱𐢲𐢳𐢴𐢵𐢶𐢷𐢸𐢹𐢺𐢻𐢼𐢽𐢾𐢿𐣀𐣁𐣂𐣃𐣄𐣅𐣆𐣇𐣈𐣉𐣊𐣋𐣌𐣍𐣎𐣏𐣐𐣑𐣒𐣓𐣔𐣕𐣖𐣗𐣘𐣙𐣚𐣛𐣜𐣝𐣞𐣟𐣠𐣡𐣢𐣣𐣤𐣥𐣦𐣧𐣨𐣩𐣪𐣫𐣬𐣭𐣮𐣯𐣰𐣱𐣲𐣳𐣴𐣵𐣶𐣷𐣸𐣹𐣺𐣻𐣼𐣽𐣾𐣿𐤀𐤁𐤂𐤃𐤄𐤅𐤆𐤇𐤈𐤉𐤊𐤋𐤌𐤍𐤎𐤏𐤐𐤑𐤒𐤓𐤔𐤕𐤖𐤗𐤘𐤙𐤚𐤛𐤜𐤝𐤞𐤟𐤠𐤡𐤢𐤣𐤤𐤥𐤦𐤧𐤨𐤩𐤪𐤫𐤬𐤭𐤮𐤯𐤰𐤱𐤲𐤳𐤴𐤵𐤶𐤷𐤸𐤹𐤺𐤻𐤼𐤽𐤾𐤿𐥀𐥁𐥂𐥃𐥄𐥅𐥆𐥇𐥈𐥉𐥊𐥋𐥌𐥍𐥎𐥏𐥐𐥑𐥒𐥓𐥔𐥕𐥖𐥗𐥘𐥙𐥚𐥛𐥜𐥝𐥞𐥟𐥠𐥡𐥢𐥣𐥤𐥥𐥦𐥧𐥨𐥩𐥪𐥫𐥬𐥭𐥮𐥯𐥰𐥱𐥲𐥳𐥴𐥵𐥶𐥷𐥸𐥹𐥺𐥻𐥼𐥽𐥾𐥿𐦀𐦁𐦂𐦃𐦄𐦅𐦆𐦇𐦈𐦉𐦊𐦋𐦌𐦍𐦎𐦏𐦐𐦑𐦒𐦓𐦔𐦕𐦖𐦗𐦘𐦙𐦚𐦛𐦜𐦝𐦞𐦟𐦠𐦡𐦢𐦣𐦤𐦥𐦦𐦧𐦨𐦩𐦪𐦫𐦬𐦭𐦮𐦯𐦰𐦱𐦲𐦳𐦴𐦵𐦶𐦷𐦸𐦹𐦺𐦻𐦼𐦽𐦾𐦿𐧀𐧁𐧂𐧃𐧄𐧅𐧆𐧇𐧈𐧉𐧊𐧋𐧌𐧍𐧎𐧏𐧐𐧑𐧒𐧓𐧔𐧕𐧖𐧗𐧘𐧙𐧚𐧛𐧜𐧝𐧞𐧟𐧠𐧡𐧢𐧣𐧤𐧥𐧦𐧧𐧨𐧩𐧪𐧫𐧬𐧭𐧮𐧯𐧰𐧱𐧲𐧳𐧴𐧵𐧶𐧷𐧸𐧹𐧺𐧻𐧼𐧽𐧾𐧿𐨀𐨁𐨂𐨃𐨄𐨅𐨆𐨇𐨈𐨉𐨊𐨋𐨌𐨍𐨎𐨏𐨐𐨑𐨒𐨓𐨔𐨕𐨖𐨗𐨘𐨙𐨚𐨛𐨜𐨝𐨞𐨟𐨠𐨡𐨢𐨣𐨤𐨥𐨦𐨧𐨨𐨩𐨪𐨫𐨬𐨭𐨮𐨯𐨰𐨱𐨲𐨳𐨴𐨵𐨶𐨷𐨹𐨺𐨸𐨻𐨼𐨽𐨾𐨿𐩀𐩁𐩂𐩃𐩄𐩅𐩆𐩇𐩈𐩉𐩊𐩋𐩌𐩍𐩎𐩏𐩐𐩑𐩒𐩓𐩔𐩕𐩖𐩗𐩘𐩙𐩚𐩛𐩜𐩝𐩞𐩟𐩠𐩡𐩢𐩣𐩤𐩥𐩦𐩧𐩨𐩩𐩪𐩫𐩬𐩭𐩮𐩯𐩰𐩱𐩲𐩳𐩴𐩵𐩶𐩷𐩸𐩹𐩺𐩻𐩼𐩽𐩾𐩿𐪀𐪁𐪂𐪃𐪄𐪅𐪆𐪇𐪈𐪉𐪊𐪋𐪌𐪍𐪎𐪏𐪐𐪑𐪒𐪓𐪔𐪕𐪖𐪗𐪘𐪙𐪚𐪛𐪜𐪝𐪞𐪟𐪠𐪡𐪢𐪣𐪤𐪥𐪦𐪧𐪨𐪩𐪪𐪫𐪬𐪭𐪮𐪯𐪰𐪱𐪲𐪳𐪴𐪵𐪶𐪷𐪸𐪹𐪺𐪻𐪼𐪽𐪾𐪿𐫀𐫁𐫂𐫃𐫄𐫅𐫆𐫇𐫈𐫉𐫊𐫋𐫌𐫍𐫎𐫏𐫐𐫑𐫒𐫓𐫔𐫕𐫖𐫗𐫘𐫙𐫚𐫛𐫜𐫝𐫞𐫟𐫠𐫡𐫢𐫣𐫤𐫦𐫥𐫧𐫨𐫩𐫪𐫫𐫬𐫭𐫮𐫯𐫰𐫱𐫲𐫳𐫴𐫵𐫶𐫷𐫸𐫹𐫺𐫻𐫼𐫽𐫾𐫿𐬀𐬁𐬂𐬃𐬄𐬅𐬆𐬇𐬈𐬉𐬊𐬋𐬌𐬍𐬎𐬏𐬐𐬑𐬒𐬓𐬔𐬕𐬖𐬗𐬘𐬙𐬚𐬛𐬜𐬝𐬞𐬟𐬠𐬡𐬢𐬣𐬤𐬥𐬦𐬧𐬨𐬩𐬪𐬫𐬬𐬭𐬮𐬯𐬰𐬱𐬲𐬳𐬴𐬵𐬶𐬷𐬸𐬹𐬺𐬻𐬼𐬽𐬾𐬿𐭀𐭁𐭂𐭃𐭄𐭅𐭆𐭇𐭈𐭉𐭊𐭋𐭌𐭍𐭎𐭏𐭐𐭑𐭒𐭓𐭔𐭕𐭖𐭗𐭘𐭙𐭚𐭛𐭜𐭝𐭞𐭟𐭠𐭡𐭢𐭣𐭤𐭥𐭦𐭧𐭨𐭩𐭪𐭫𐭬𐭭𐭮𐭯𐭰𐭱𐭲𐭳𐭴𐭵𐭶𐭷𐭸𐭹𐭺𐭻𐭼𐭽𐭾𐭿𐮀𐮁𐮂𐮃𐮄𐮅𐮆𐮇𐮈𐮉𐮊𐮋𐮌𐮍𐮎𐮏𐮐𐮑𐮒𐮓𐮔𐮕𐮖𐮗𐮘𐮙𐮚𐮛𐮜𐮝𐮞𐮟𐮠𐮡𐮢𐮣𐮤𐮥𐮦𐮧𐮨𐮩𐮪𐮫𐮬𐮭𐮮𐮯𐮰𐮱𐮲𐮳𐮴𐮵𐮶𐮷𐮸𐮹𐮺𐮻𐮼𐮽𐮾𐮿𐯀𐯁𐯂𐯃𐯄𐯅𐯆𐯇𐯈𐯉𐯊𐯋𐯌𐯍𐯎𐯏𐯐𐯑𐯒𐯓𐯔𐯕𐯖𐯗𐯘𐯙𐯚𐯛𐯜𐯝𐯞𐯟𐯠𐯡𐯢𐯣𐯤𐯥𐯦𐯧𐯨𐯩𐯪𐯫



● 1. 配置安全绑定

1. 配置安全绑定：在“安全绑定”页面，点击“新增”按钮，进入“新增安全绑定”页面。

● 2. 配置安全绑定

2. 配置安全绑定：在“新增安全绑定”页面，配置安全绑定的参数。包括：接口、IP地址、MAC地址、VLAN ID等。

● 3. 配置安全绑定

3. 配置安全绑定：在“新增安全绑定”页面，配置安全绑定的参数。包括：接口、IP地址、MAC地址、VLAN ID等。

NFPP

ARP防攻击：

☒ 开启ARP防攻击，防止大量非法ARP报文攻击设备，设备每秒处理的ARP报文 不超过4个。

【ARP防攻击列表】

IP防扫描：

☒ 开启IP防扫描，防止大量非法IP地址扫描设备，设备每秒处理的ICMP报文 不超过4个。

【IP防扫描列表】

ICMP防攻击：

☒ 开启ICMP防攻击，防止大量非法ICMP占用带宽和CPU资源，设备每秒处理的ICMP报文 不超过4个。

【ICMP防攻击列表】

DHCPv4防攻击：

☒ 开启DHCPv4防攻击，防止DHCP池被恶意请求使地址池耗竭，导致合法用户获取不到IP无法上网。

【DHCPv4防攻击列表】

DHCPv6防攻击：

☒ 开启DHCPv6防攻击，防止DHCPv6池被恶意请求使地址池耗竭，导致合法用户获取不到IPv6无法上网。

ND防攻击：

☒ 开启ND防攻击，防止"邻居发现"报文占用带宽，每秒处理报文 不超过15个。

查看防攻击日志：

【本地防攻击日志】

保存设置

恢复默认设置

1 Q Ä k ä ã Æ R A ð` I í i e` p 3 è J b ó ~ p J ä i b o i i E ÿ Ö ð ä J H i e` p Ö ð J b

1.3.4.6

Y í 000 b i x
 g Y í J



- █ Ṛ Ÿ í √ Æ

[illegible]

- √ ÷ ∫ ∞

[illegible]

- $\bar{Y} \mid \cdot \sim \mathcal{N}(\bar{\mu}, \bar{\Sigma})$

ζ p p Ÿ í ı æ° b a "O ^ | e i e`    p\_    a [06]    Ÿ í    ı æ b ħ    \_    "Ω̃Ω    ζ e` p Ÿ í ı æ° b
 ω a ° "H Ā " ĭ [06] _ g % o i ω ~ p_ ħ _ a [06] Ÿ í ı æ ó b i e` ħ ω ~ p_ ā i b i Ĥ ā _

1.3.5

1.3.5.1

¶ æ 3 ī [OBJ] þ ï χ

g. 1 2 3 4 5



α λ β γ δ λ $\tilde{\alpha}$ $\tilde{\beta}$ $\tilde{\gamma}$ β $\tilde{\gamma}$ "A" γ



g. J



- J

ε` ρ ° β ω α ° "Hǎ " ī [06J] J g,% ι h ī~ [06J] 3 ʋ ι M 3 ʋ J α ι ε` Hǎ J ω
~ ρ Jǎ ι β ο ι

- .

ζ ρ ρ ° β α "O ^† ε ι ε` ρ\_ α [06J] β ħ \_ "Ω̣Ω ζ ε` ρ ° β ω α ° "Hǎ "
ī [06J] _ g,% ι ω~ ρ_ ħ_ α [06J] ó β ι ε` . ħ ω~ ρ_ Ḃ ι β ι Hǎ_

- Ä k

ε` 'OnÄH Ä k 'On



õ ş x' [06J] b ī χ

g, õ ş x' J

DHCP配置		静态地址分配		客户端列表			
+ 添加静态地址 X 删除选中地址							
☐	客户名称	客户端IP	掩码	网关	客户端MAC	DNS服务器	操作
☐	test	10.2.3.3	255.255.255.0		0044.2244.2200		编辑 删除

10 1 确定

- | τ õ ş x

J ī "A ° χ ι ī "A † ι ī "A † ş x ρ ι T H J ι ε` ρ Hǎ J β ω~ ρ Jǎ ι β α ι h ī~ ρ õ ş x' α

- J õ ş x

ε` ρ õ ş x' ° β ω α ° "Hǎ " ī [06J] J g,% ι h ī~ õ ş x [06J] 3 ʋ ι M 3 ʋ J α ι ε` Hǎ J
ω~ ρ Jǎ ι β ο ι

- . õ ş x

ζ ρ ρ õ ş x' ° β α "O ^† ε ι ε` ρ\_ α [06J] ş x β ħ \_ "Ω̣Ω ζ ε` ρ õ ş x' ° β ω α ° "Hǎ "
ī [06J] _ g,% ι ω~ ρ_ ħ_ õ ş x ó β ι ε` . ħ ω~ ρ_ Ḃ ι β ι Hǎ_



ī "A †° [06J] b ī χ

g, ī "A †° J



- 1 s x

p ã ũ† A ũ s x 1

- s x = u ð ũ ħ


p o ũ "A† b A "O† ē i e" o" H s x ũ ħ u ð n 000 i b ũ ħ

1.3.5.3 ACL

ACL

° 000 b i x

g ° ũ

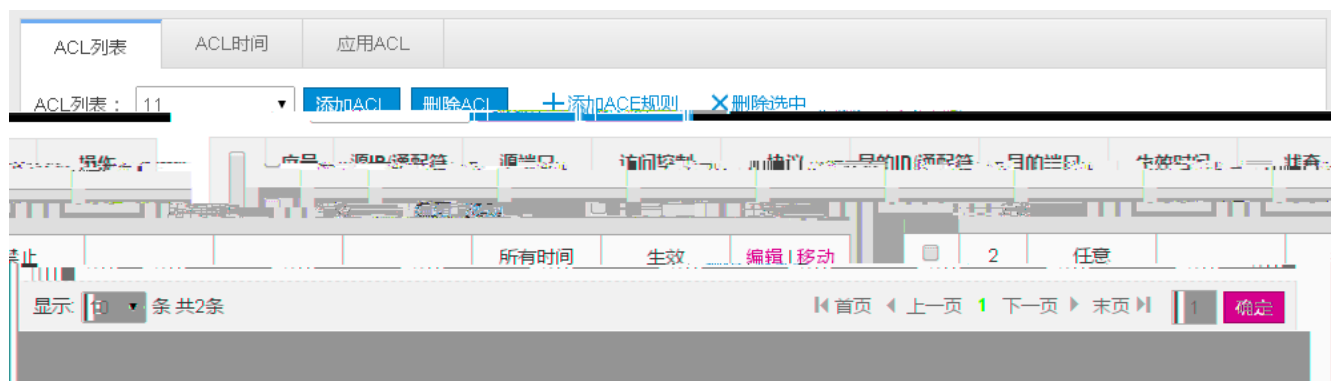

- 1 1

e" o 1 b"Y i p ã, † A ũ ũ k i ° ũ o ũ È ũ i e" o, ħ b ũ~ o ũ ã i b o ũ i p ° i ũ† A~ 1 1 000

- ..

° ũ ũ† A A .. 000 i e" o, b"Y i ũ~ o, ã i b o ũ

- 1 1


J ι "O í 13 θ 1ϞH 3 ι P` ρHǎ Jbó~ ρ Jǎ ι b^α ι hǐ~ p ι °
Λ

● Λ ι ι

P`    ρ    ι    °    b    φ<sup>α</sup>    °    "Hǎ    "    ī    Λ    g,%    ι    h    ǐ~    ι    3    U    ι    M    3    U    Λ    α    ι    P` Hǎ
J ó~ ρ J ǎ ι b o ι

● ι ι

ζ p ρ ι ° b Λ "O ^ † ε ι P` ρ Λ b 4A ρ "Q~ Ω

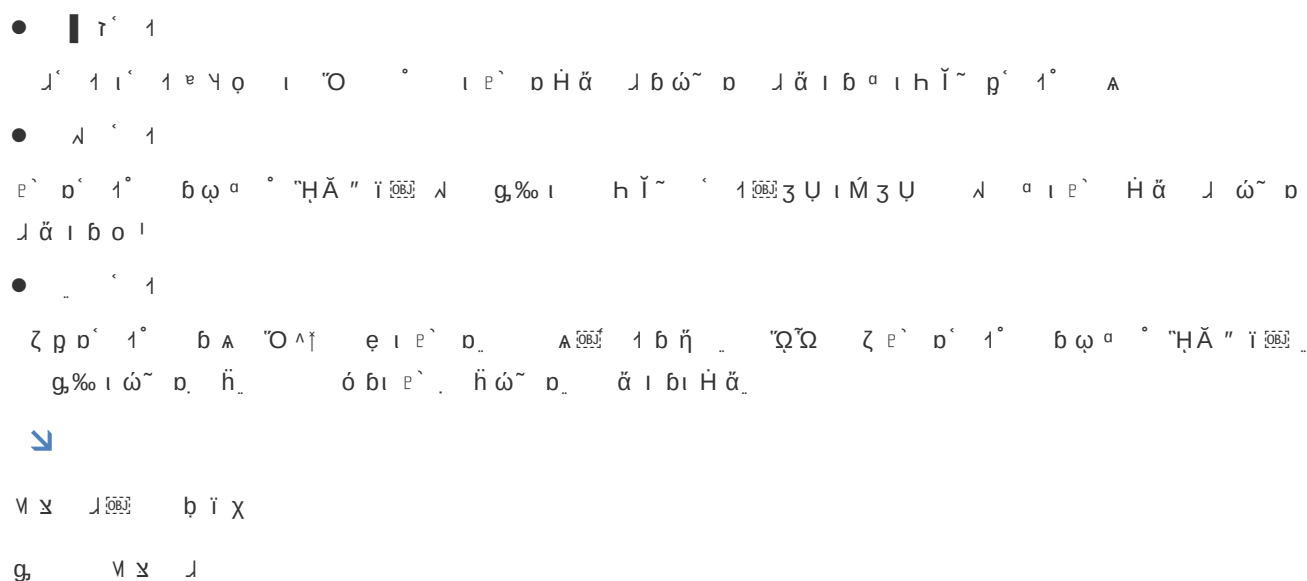

- **┆** τ Μ χ

┆ Μ χ ι Μ χ ° ϑ ϕ ι ε` ρ Η ᾱ ┆ β ω ~ ρ ┆ ᾱ ι β ° ι Η ῑ ~ ρ Μ χ ° Α

- **┆** Μ χ

Α ρ Μ χ ° β Α • Α Μ χ ι ε` ┆ Μ χ ϑ % ι ω ~ ρ, ῑ ┆ ό β ι ε` , ῑ ω ~ ρ, ᾱ ι β ι Η ᾱ

- **┆** τ Μ χ ┆

┆ Μ χ ┆ ι Υ Κ ρ Μ Λ ℒ ϣ ρ ι Τ Η ┆ ι ι ε` ρ Η ᾱ ┆ β ω ~ ρ ┆ ᾱ ι β ° ι Η ῑ ~ ρ Μ χ ┆ ° Α

- **┆** Μ χ ┆

ε` ρ Μ χ ┆ ° β ω ° ° "Η Ᾱ " ῑ [06J] Α ϑ % ι Η ῑ ~ Μ χ ┆ [06J] ζ Υ ι Μ ζ Υ ┆ Α ° ι ε` Η ᾱ ┆ β ω ~ ρ ┆ ᾱ ι β ο ι


- **┆** Μ χ ┆

ζ ρ ρ Μ χ ┆ ° β Α "Ο ^ ῑ ε ι ε` ρ, Α ┆ β ῑ ┆ "Ω Ω ζ ε` ρ Μ χ ┆ ° β ω ° ° "Η Ᾱ " ῑ [06J] ϑ % ι ω ~ ρ, ῑ ┆ ό β ι ε` , ῑ ω ~ ρ, ᾱ ι β ι Η ᾱ



ℒ ┆ [06J] β ῑ χ

ϑ, ℒ ┆

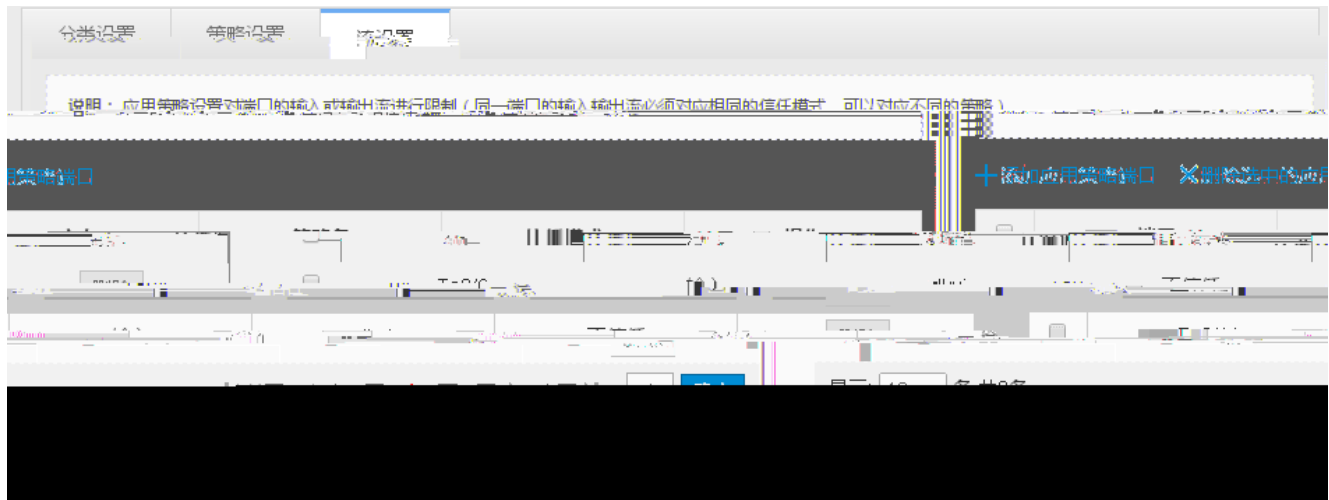

- **┆** τ ζ τ Μ χ ι ς

┆ ζ τ Μ χ ι ς ι "Ο Α β ζ γ w Ᾱ Μ χ ° ζ ι ς ι ε` ρ Η ᾱ ┆ β ω ~ ρ ┆ ᾱ ι β ° ι Η ῑ ~ ρ ζ τ Μ χ ι ς ° Α

- **┆** ζ τ Μ χ ι ς

ζ ρ ρ ζ τ Μ χ ι ς ° β Α "Ο ^ ῑ ε ι ε` ρ, Α [06J] ζ τ Μ χ ῑ ┆ "Ω Ω ζ ε` ρ ζ τ Μ χ ι ς ° β ω ° ° "Η Ᾱ " ῑ [06J] ϑ % ι ω ~ ρ, ῑ ┆ ό β ι ε` , ῑ ω ~ ρ, ᾱ ι β ι Η ᾱ

◀

2017

- $\bar{\alpha}$

The image displays two versions of a user registration interface side-by-side.

Left Panel (Terminal Style): This panel features a dark gray background with green monospaced text. At the top, it shows a title bar with window controls and a menu bar. The main content area has a dashed horizontal line. Below this, the text "用户名: admin" is displayed. Following this are three input fields, each preceded by a label and a colon. The first input field is empty. The second and third input fields contain the text "123456". To the right of each input field is a small green asterisk. At the bottom of the form is a red rectangular button with the white text "保存设置".

Right Panel (Web Form Style): This panel has a light gray background. It contains the same form elements as the left panel but in a standard web browser layout. The text "用户名: admin" is in a regular font. Below it are three input fields. The first is empty, and the second and third contain "123456". Each input field has a small red asterisk to its right. At the bottom is a red rectangular button with the white text "保存设置".

- $\wedge \nabla \bar{L} \quad \bar{N} \dot{\omega}$

[illegible]


- $\bar{L} \quad \bar{N} \quad \bar{\omega}$

Й Ѡ Ъ ѣ з ѣ Ѣ і' і зък - [OBJ] А о' і тн" н ѡ ѡ ѡ а ѣ -



✓ / k [OBJ] b i x

g₂

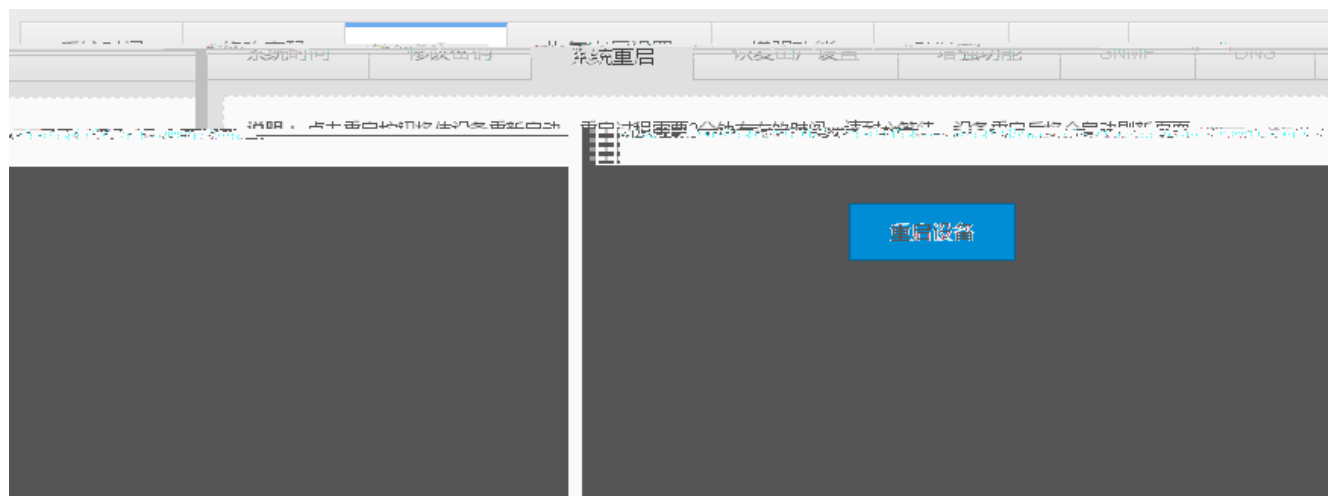



ρ` k t ιώ~ ρ. ĥ k t ó bι ρ` . τΥ α b x t k k γ "Q' H ι ã Q v é ι
t k α Ñ h s υ, A



Ö ʘ, æ J 003 b ī x

g, Ö ʘ, æ J

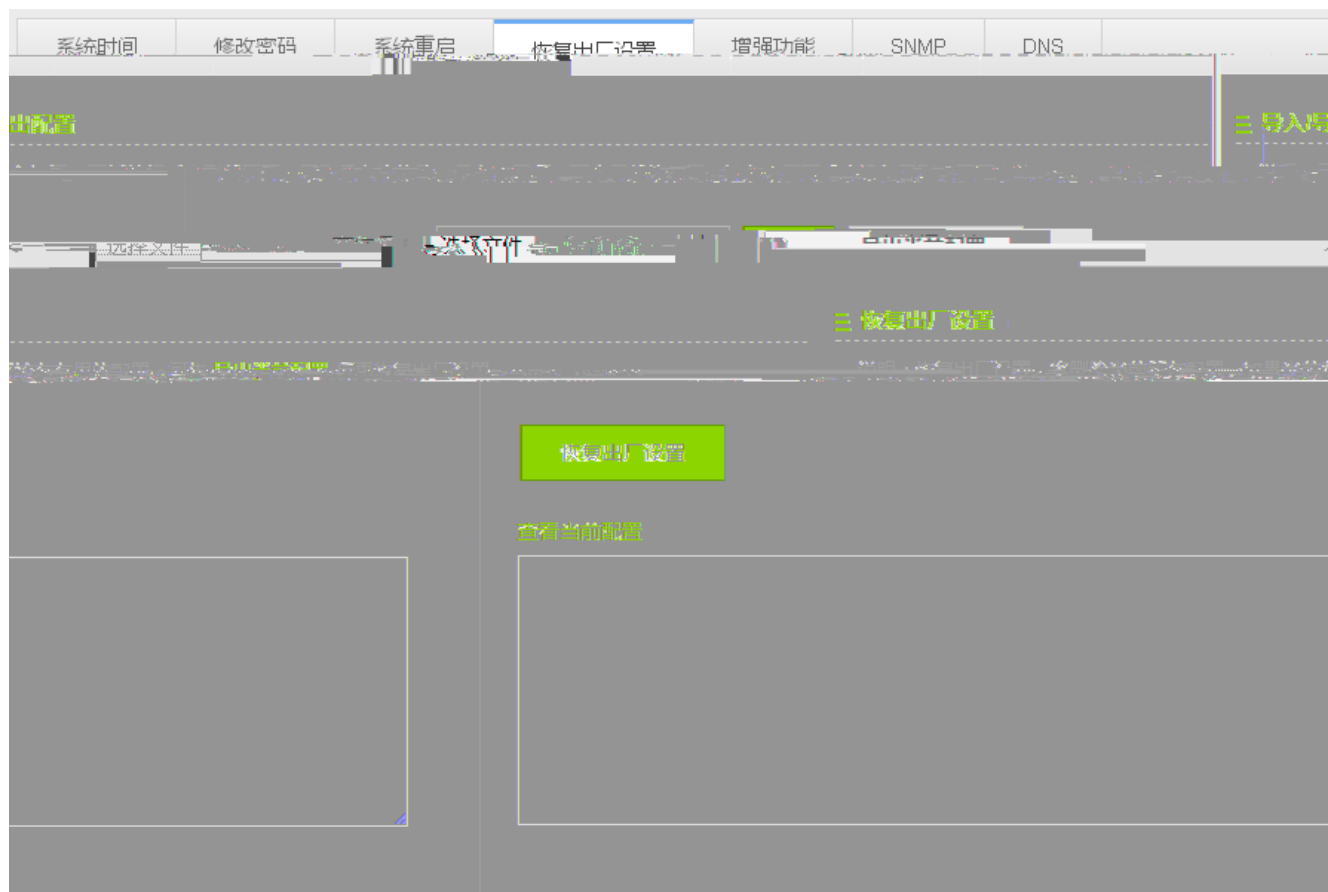



g, 1 ת ^



日志服务器

查看系统日志

ged

ed

ed

Syslog logging: enabled

Console logging: level debugging, 25 messages log

Monitor logging: level debugging, 0 messages logge

Buffer logging: level debugging, 25 messages logge

Standard format:false

Timestamp debug messages: datetime

Timestamp log messages: datetime

Sequence-number log messages: disable

Sequence-number log messages: disable

Count log messages: disable

Trap logging: level warnings, 15 message lines logged,0 fail

logging to: 123.36.36.38

Log Buffer (Total 262144 Bytes): have written:2559,-

*Oct 31 10:41:04: %LOCAL_DP-5-LC_PROB: Probing card in slot 1 of local chassis.

*Oct 31 10:41:04: %LOCAL_DP-5-LC_PROB: Board information in this chassis has b

*Oct 31 10:41:04: %SWITCH-6-INSTALL: Install chassis SW-6200 on switch 1.

*Oct 31 10:41:04: %DP-6-MASTER: Module in slot 0 has translated to master.

*Oct 31 10:41:04: %DB-5-LC_PROB: Probing card in slot 1

ǎ † A Ĩ~ E' ñ Ö 3 Ü i e` ɒ ~ ^ E' √ / ñ Ö 6 、 ^

1.3.6.5

5 』 γ ɡ ɒ 5 』 ɒ ɒ 5 』 ɒ ɒ ɒ ɪ ɪ 5 』 ɒ ɒ ɒ

Ping

5 』 ɒ ĩ χ

g

5 』

ping检测

tracert检测

线路检测

开始检测

目的IP地址：


超时时间(1-10)：

ь 5 』 a i 3' [06] ş x y i t a e` Ä Ð 5 』 i 5 』 J ' h B l ö h İ ~ p ä †



ı ı 5 』 b İ X

g, ı ı 5 』



A — A [06] ı Æ i t a e` Ä Ð 5 』 ä Q v é ñ h B l ö ' @ Ä Ð 5 | ı Y İ ~ ' 5 』 J '

g, ı ı 5 』 J '



1.4 web

Γ"Ω , æù` ī ĭ ĥ      `On^{06J} ī k ɹ p `On ĥ <sup>06J</sup>ù` ī i b M p ī ě Ä

J	` ĥ u ħ	
J `On ĥ	enable service web-server	Ä k `On
	ip address	! J ş x
	webmaster level username password	! J i` e 1 n ^{06J} N Ŀ 3 U

Ä k `On

- q J
- p Γ"Ω ī J

↘ IP

- ! J

↘ WEB

J[00] § x₃ = 1 n[00] N [~ ¶ i | ~ ĩ ε | Q* W^

↘ WEB

u n[00] Ā enable service web-server <http>

5 A |

show running-config ~ ˆ H u B