

RG-IIB-K75AS/ RG-IIB-K86AS

()

1	1
2	1
3	1
4	2
5	1
6	1
7	1
8	2
9	1

()

RG-IIB-K75AS

RG-IIB-K86AS

LCD-BOE

LCD-LG

3840X2160

3840X2160

E c O

		0 -40
		10% - 90% RH
		-20 -60
		10% - 90% RH

()

HDMI	2
VGA	1
OPS-C	1
USB3.0	4
USB2.0	2
TOUCH-USB	2
LAN	2
	1
RS-232	1
	1
S/PDIF	1

()

1

5000m

5000m

5000m

3

2

4

3

4

“

”

()

()

/PCS

1

2

VESA	PE	0.04mm*150mm*190mm
------	----	--------------------

1

8*80m

8

Φ4*10mm

8mm

()


()

1

160KG


85mm

C

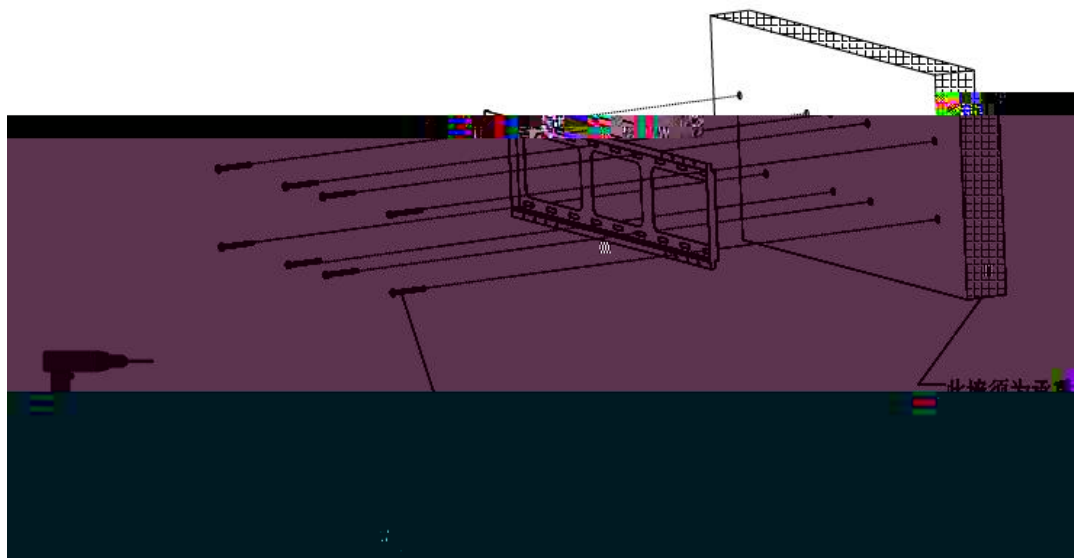

4


D

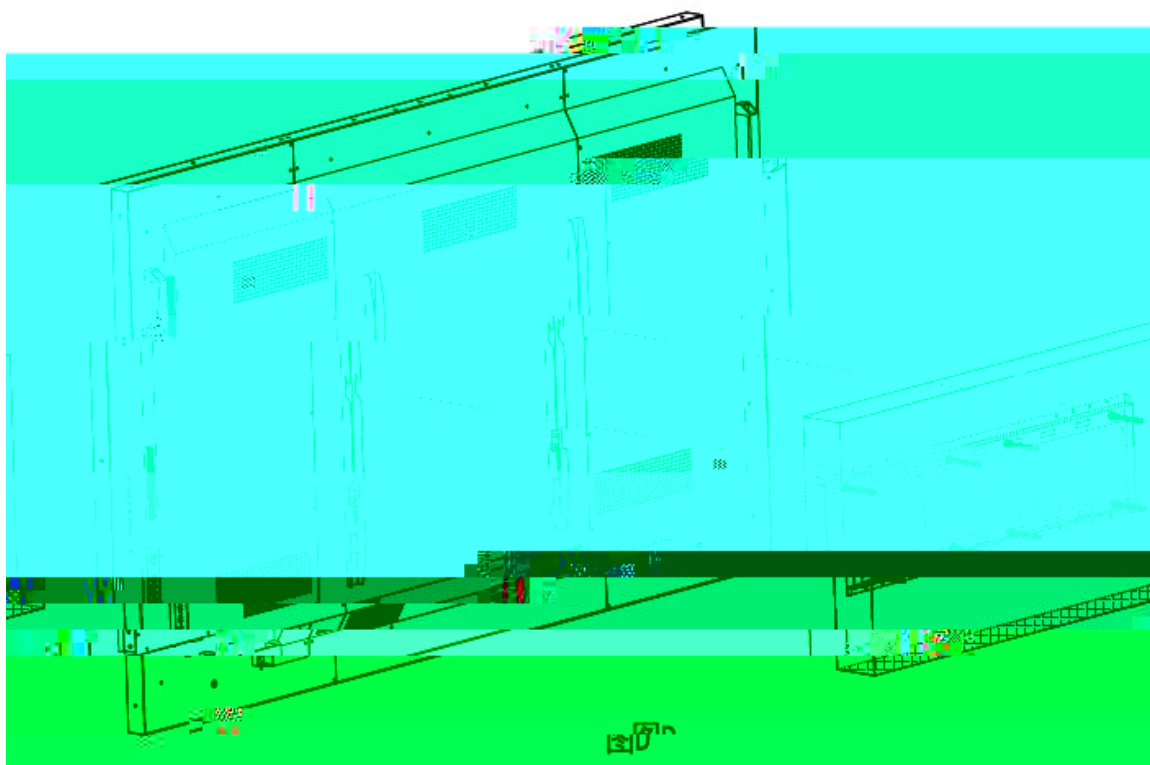

5

M5*100

E

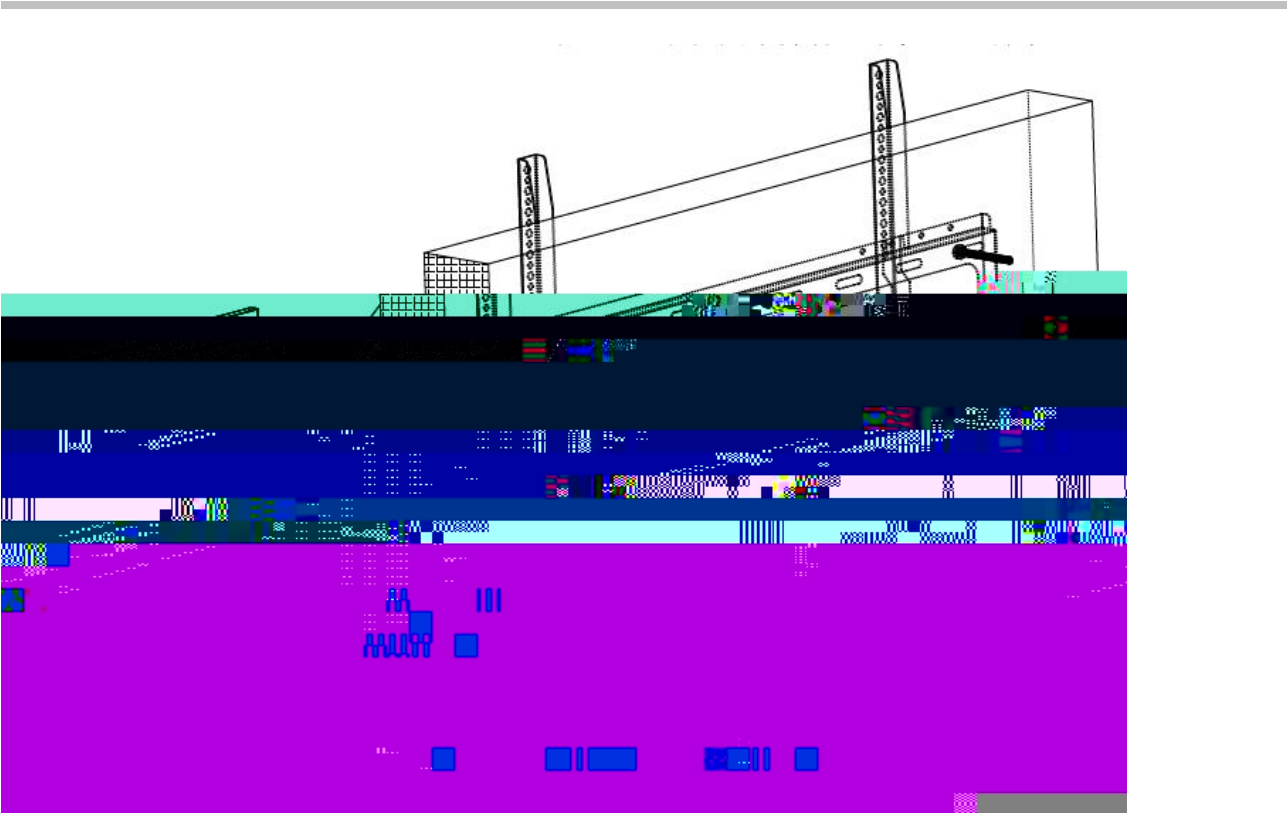

()

()

1 100~240V 500

()

USB



2

MstarUpgrade_848.bin

U

USB

USB2.0

U

“

”

10S

“

”



4

“ Ruijie ” LOGO

õ z ”]

M y

i

Trouble shooting

1

1

2

USB TOUCH

HDMI
