
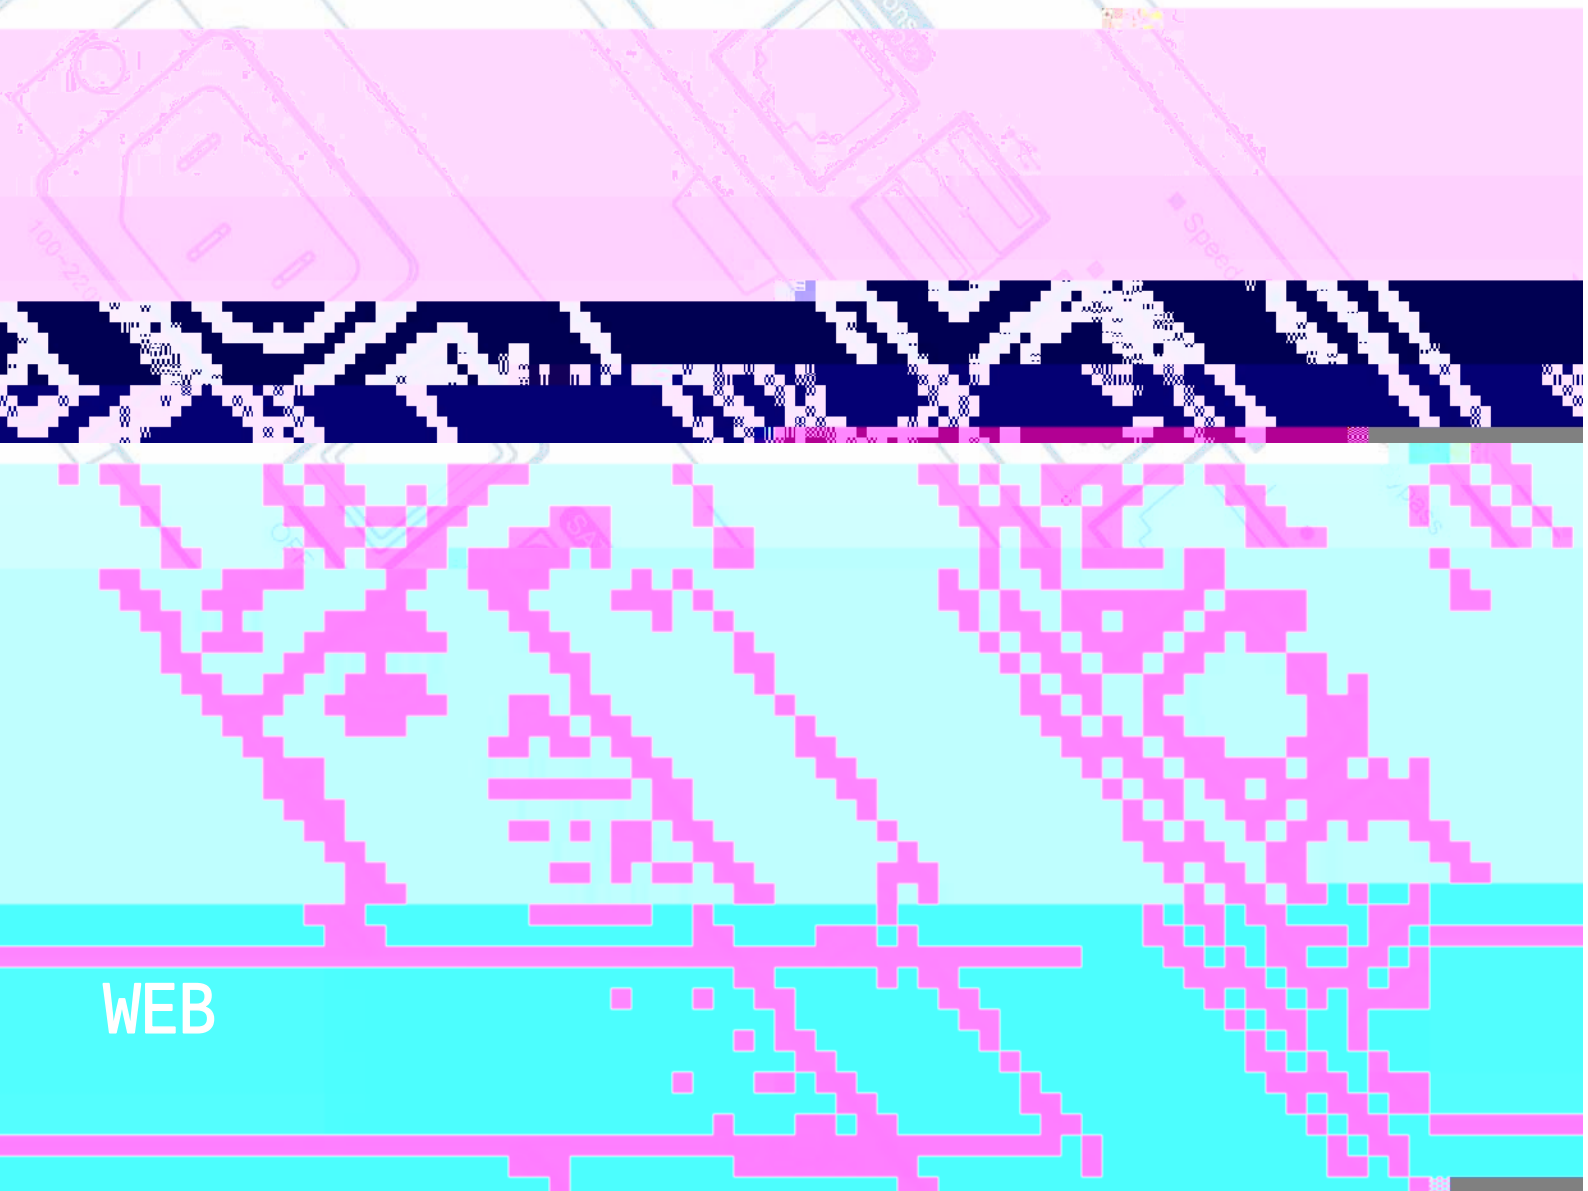




WEB

UG0EVW

V414

5354043045

<https://www.ruijiery.com/>

<https://ocs.ruijie.com.cn/?p=smb>

<https://www.ruijie.com.cn/service.aspx>

7

4001-000-078

<http://bbs.ruijiery.com/>

<https://www.ruijie.com.cn/service/know.aspx>

4001000078@ruijie.com.cn



1.

[]

[]

$\sim \{ i \mid i^{111} \}$

$[\{ i \mid i^{111}]$

22

2.




/

3.

2

2.1

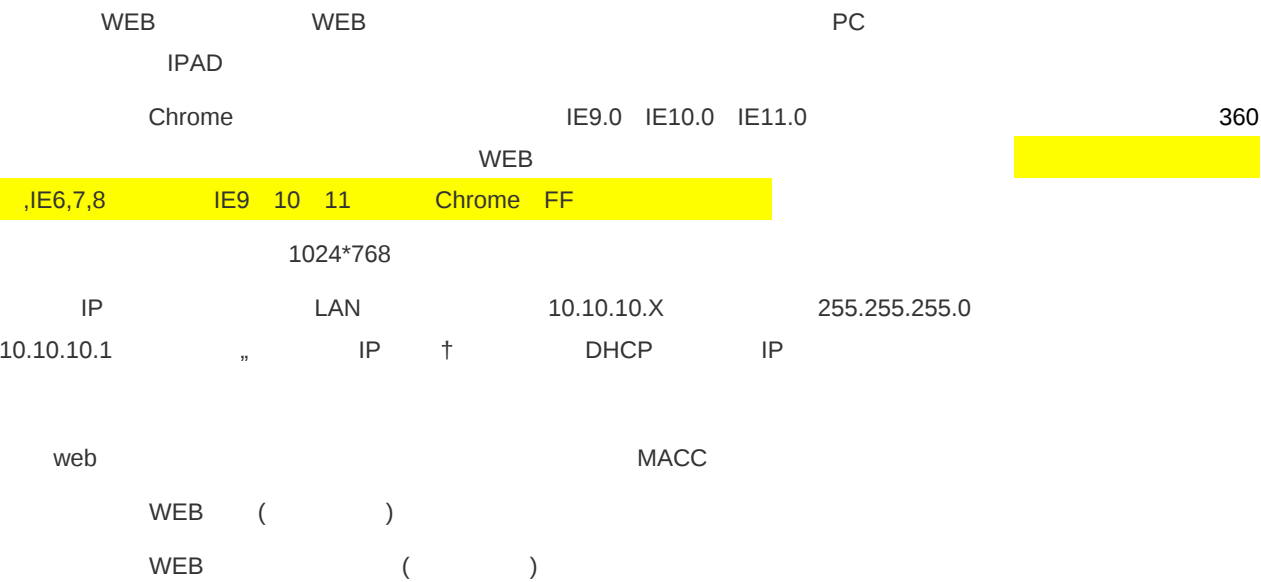


IP (LAN 10.10.10.10)

Chrome
web

10.10.10.10

web


admin

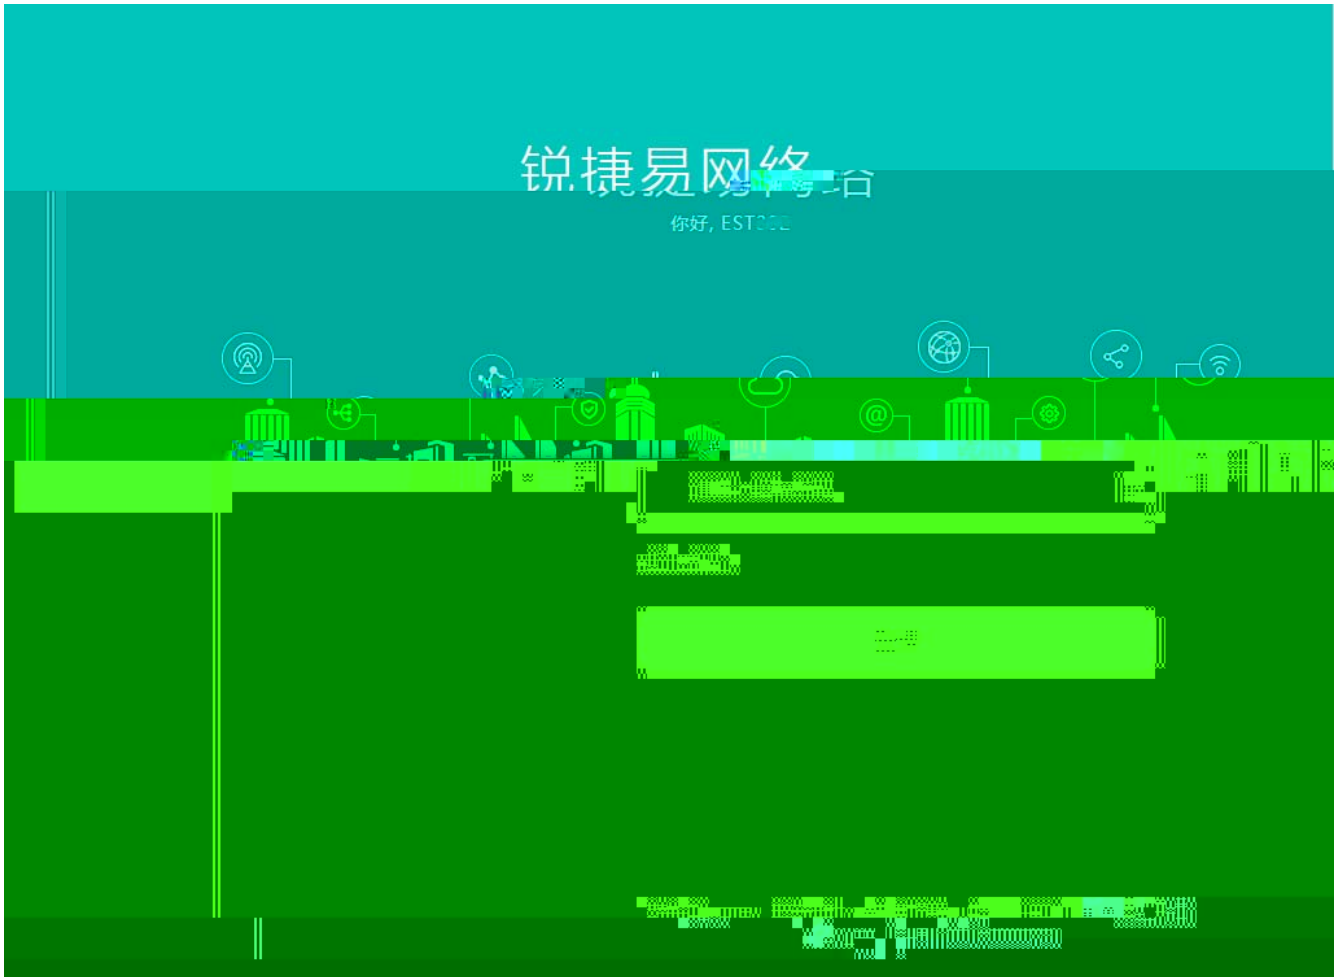

2.2

web

” †

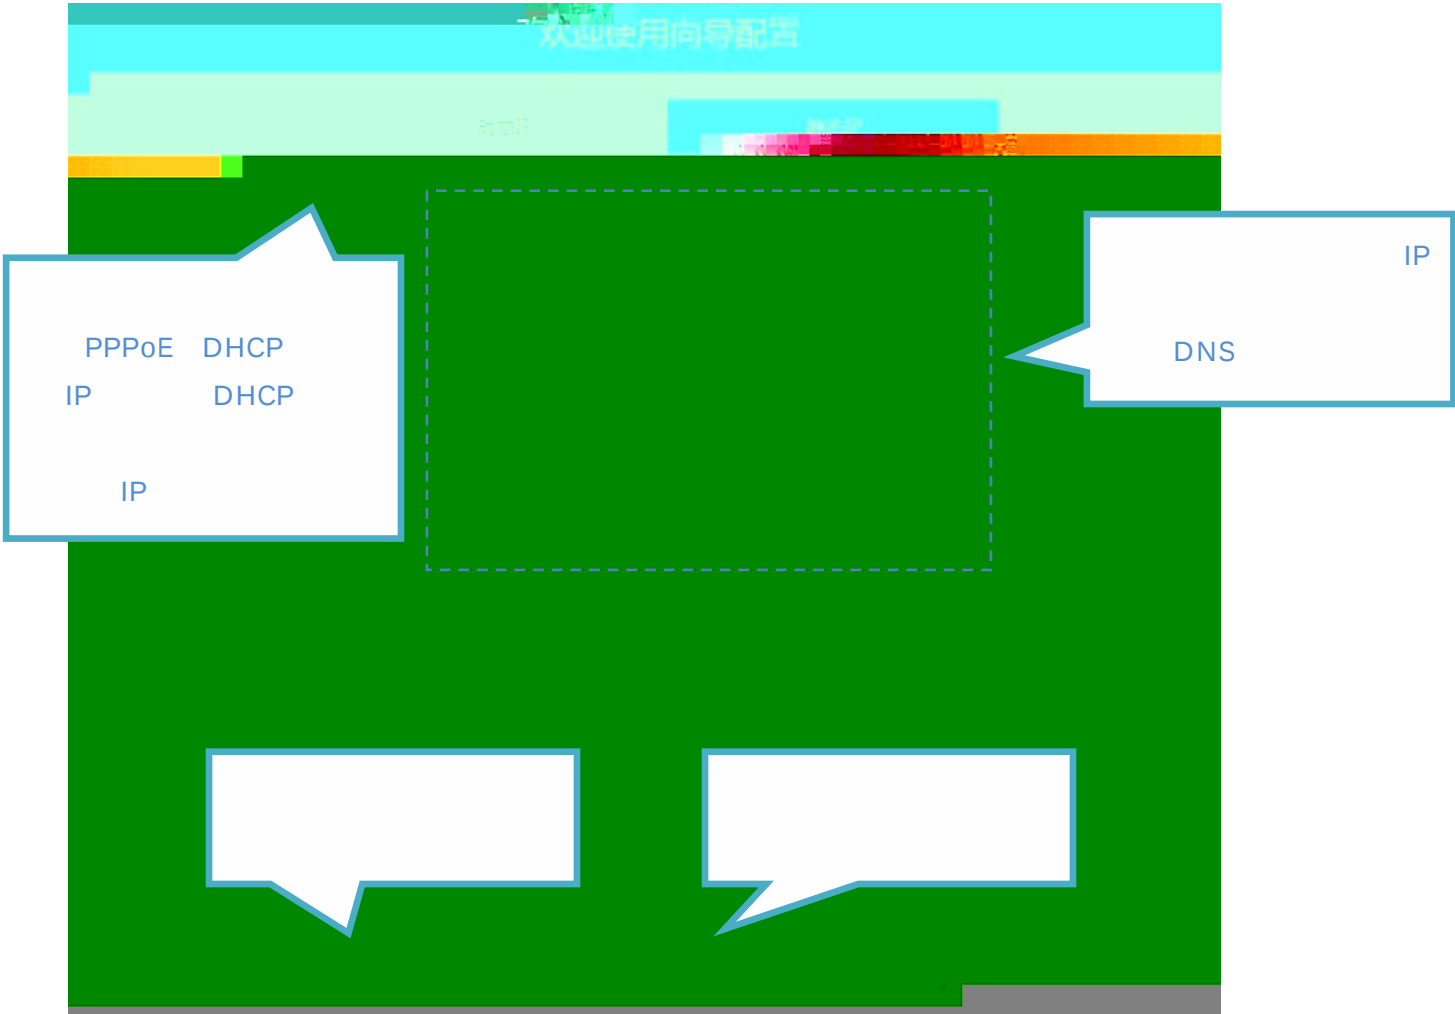


2.3 Web



APP



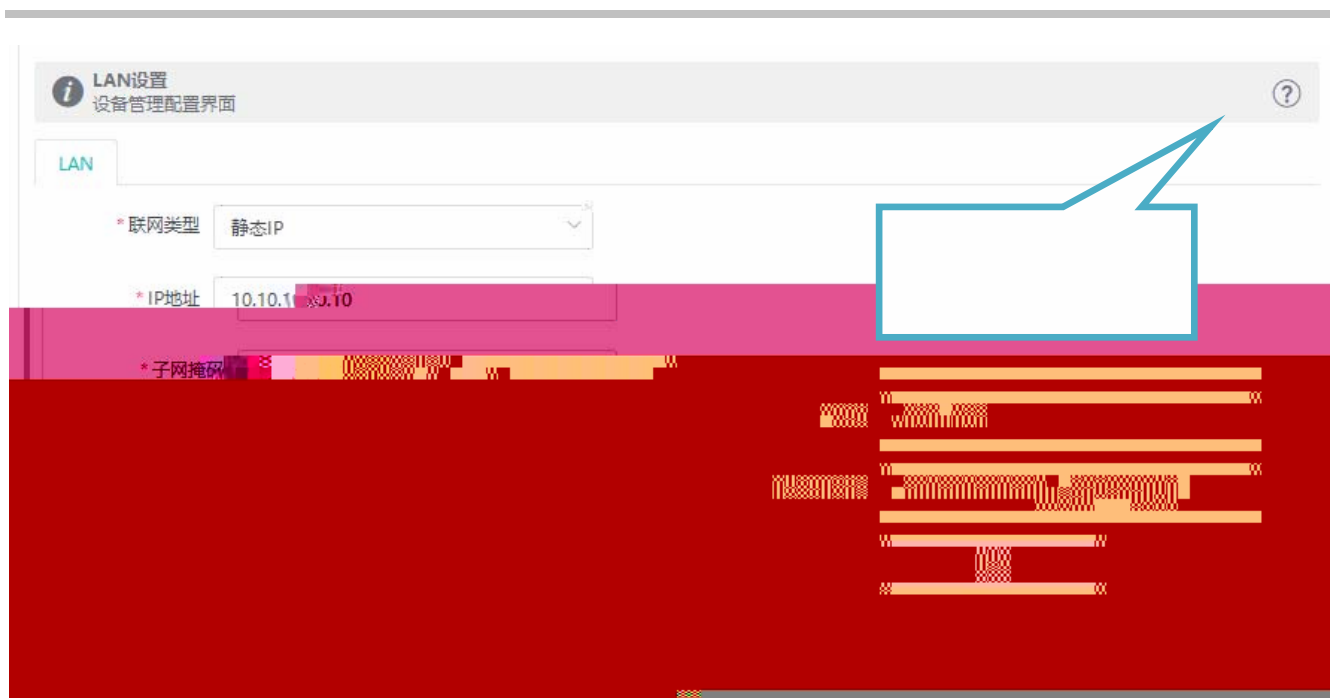

3 Eweb

3.1

The screenshot displays the Eweb web interface for a Ruijie device. The interface is divided into several sections:

- 设备概况 (Device Overview):** Located at the top, it shows three key metrics: 内存使用率 (Memory Usage) at 47%, 桥接组总设备数 (Total Bridge Group Device Count) at 2, and system information including 系统运行: 03时21分48秒 (System Running: 03:21:48) and 系统时间: 2021年10月12日 19:26:44 (System Time: 2021-10-12 19:26:44).
- 桥接组信息 (Bridge Group Information):** Located on the right side, it shows 设备名称: Ruijie (Device Name: Ruijie), MAC: [redacted], and 设备模式: CPE (Device Mode: CPE). It also includes a 锁状态: 已锁定 (Lock Status: Locked) and a button to 重新解锁 (Relock).
- 接口信息 (Interface Information):** Located at the bottom, it shows two interfaces: LAN1 and LAN2, both with IP address 10.10.10.11.
- Table:** A table with columns: 序号 (Serial Number), 设备名称 (Device Name), 关联时间 (Associated Time), RSSI, 速率(Mbps) (Rate (Mbps)), 频段 (Frequency Band), 信道 (Channel), 状态 (Status), 角色 (Role), MAC, and IP. The first row shows a device with serial number 0, name 在架 (In Rack), associated time 2021-10-12 16:00, and IP 10.10.10.11.

Three blue callout boxes are present:

- Box 1: Points to the 设备概况 section.
- Box 2: Points to the 桥接组信息 section.
- Box 3: Points to the 接口信息 section.

3.2

3.2.1 LAN

LAN

IP


IP



3.3 WiFi

3.3.1

3.3.1.1 CPE

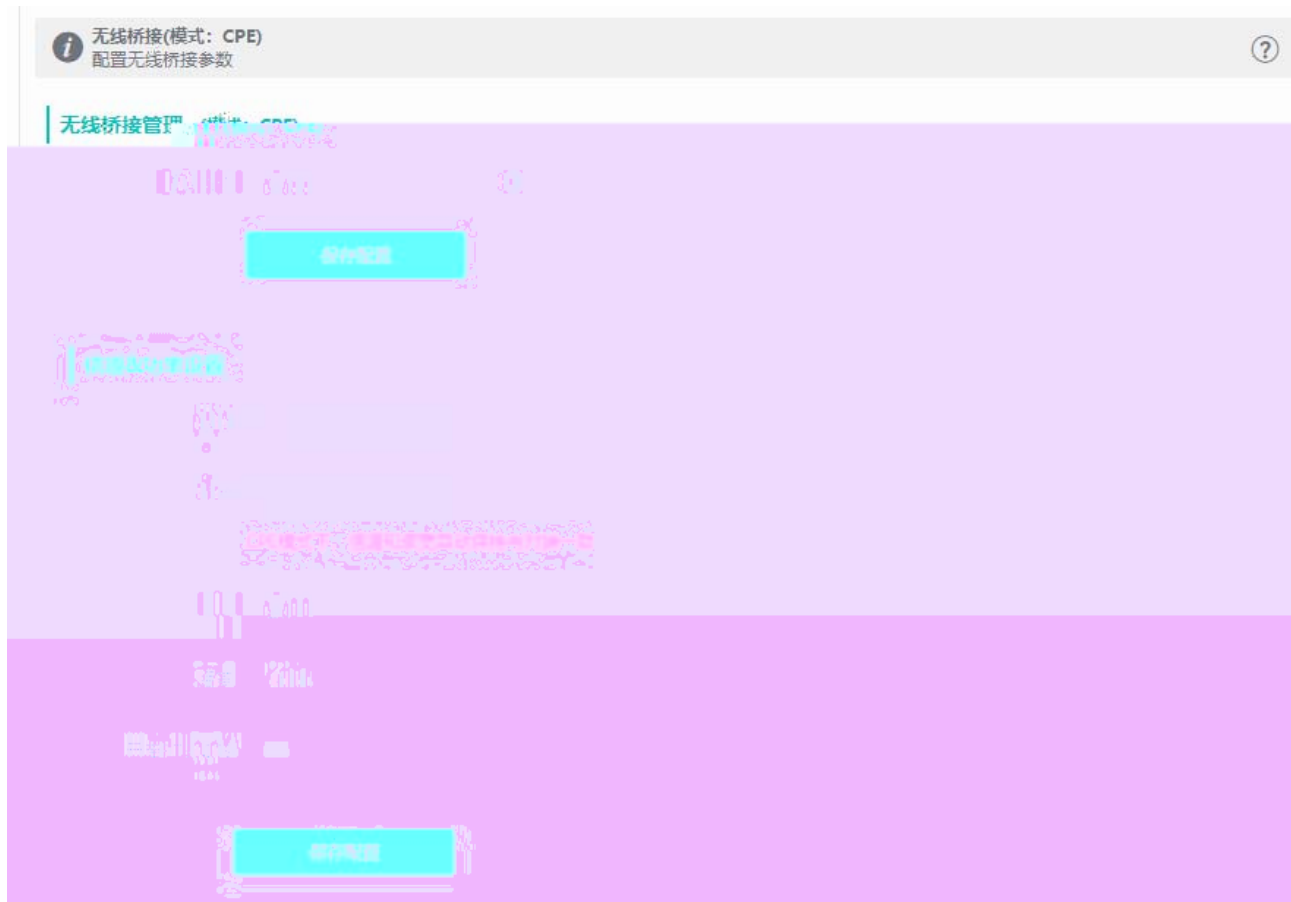

3.3.1.2 AP




3.4

3.4.1

ping

”

†

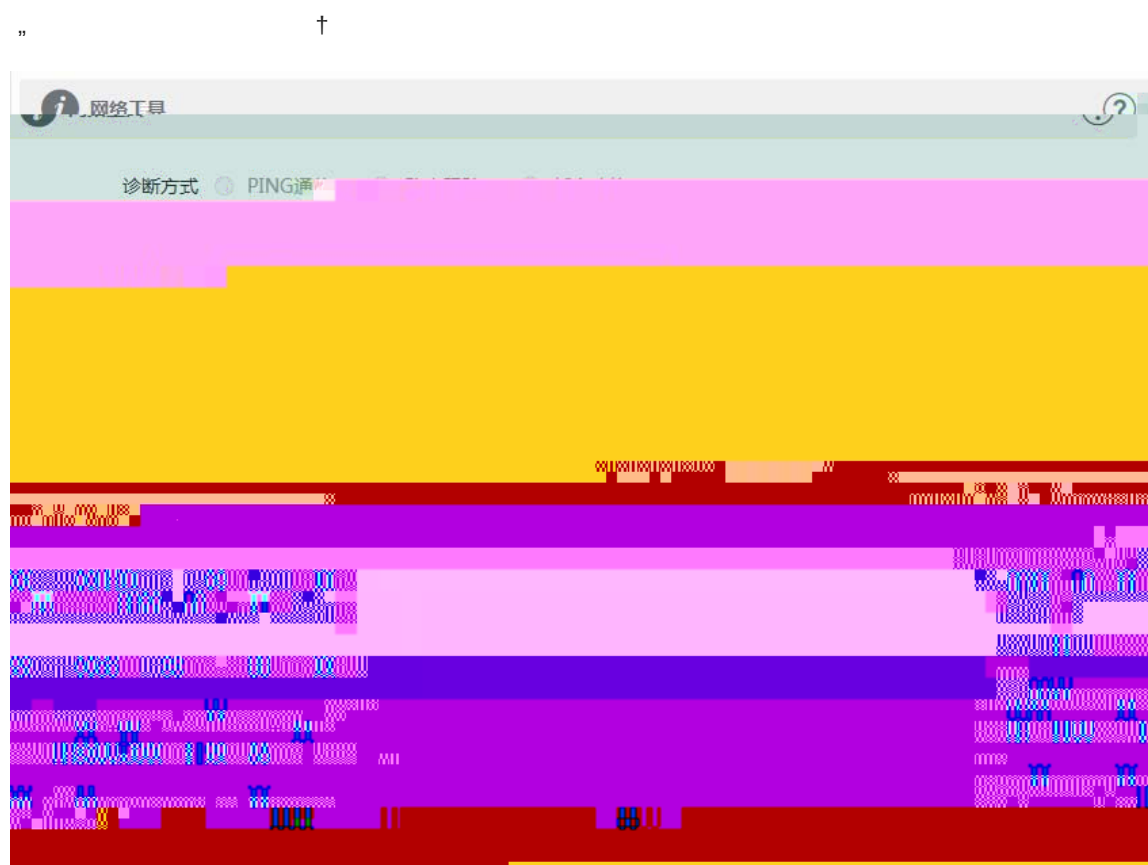

”

†



3.4.2



3.5

3.5.1

时间设置

查看 设置系统时间。

当前时间： 2018年04月24日 16:34:16

设置时间：☒ 网络获取时间 ☐ 手动设置时间

保存

” ↑

时间设置

查看 设置系统时间。

当前时间： 2018年04月24日 16:35:19

设置时间：☐ 网络获取时间 ☒ 手动设置时间

时间：

3.5.2

设备密码

修改设备密码

旧密码


新密码

* 确认新密码


登录器时间 3600

3.5.3

3.5.3.1

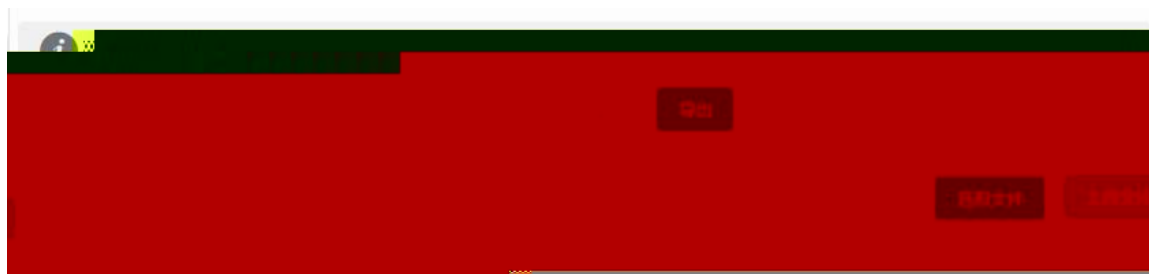

3.5.3.2

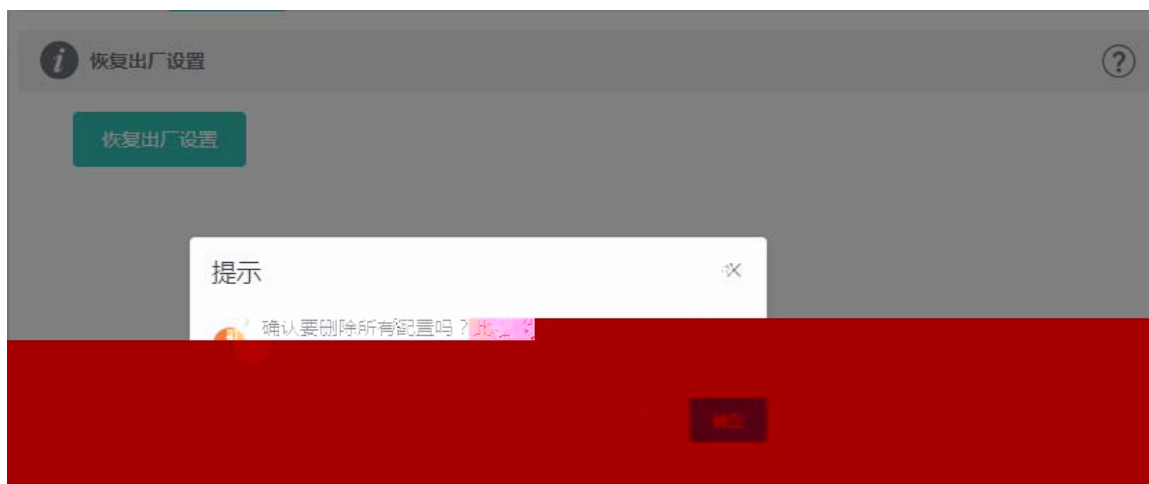

web



4

1 Web

- 1) LAN
- 2) “ IP ” DHCP IP
IP LAN IP , LAN IP
10.10.10.10 255.255.255.0 IP 10.10.10.X X 2 254
255.255.255.0
- 3) ping
- 4) (admin)

2

Reset
Reset 5 Reset
http://10.10.10.10

3

32
8 A 255.0.0.0 16 B 255.255.0.0 24
C 255.255.255.0 32 IP 255.255.255.255