





I AP AM5528



RG-AM5528

10cm

3

I AP AM5528



RG-AM5528

10

RG-AM5528

I AP AM5514



RG-AM5514

10cm

I AP AM5514



RG-AM5514

♪ RG-AM5514



ñ

.



fi

10



I

AP



天



MAP552

♪


♪

♪

fi

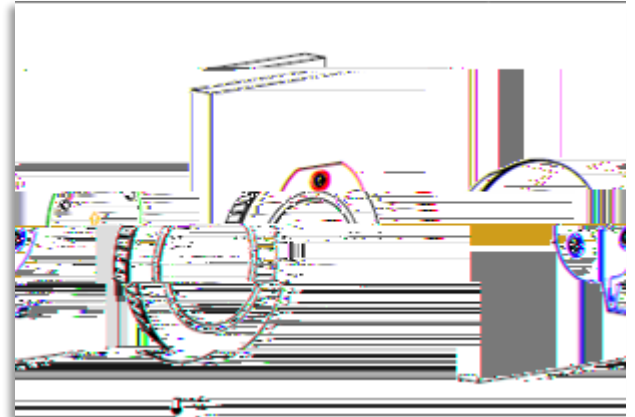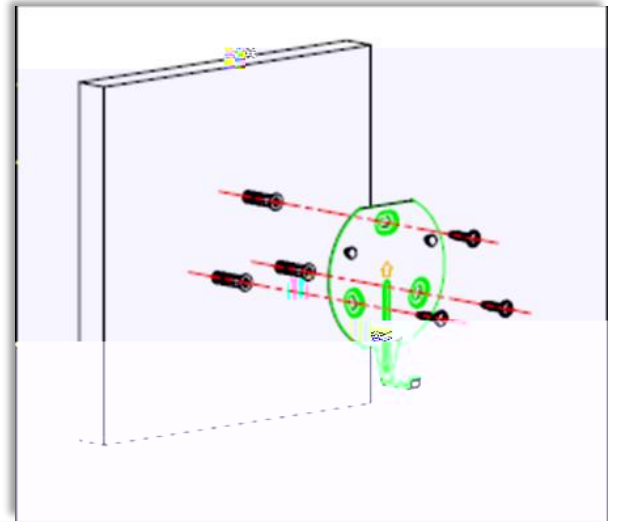

MAP552-W

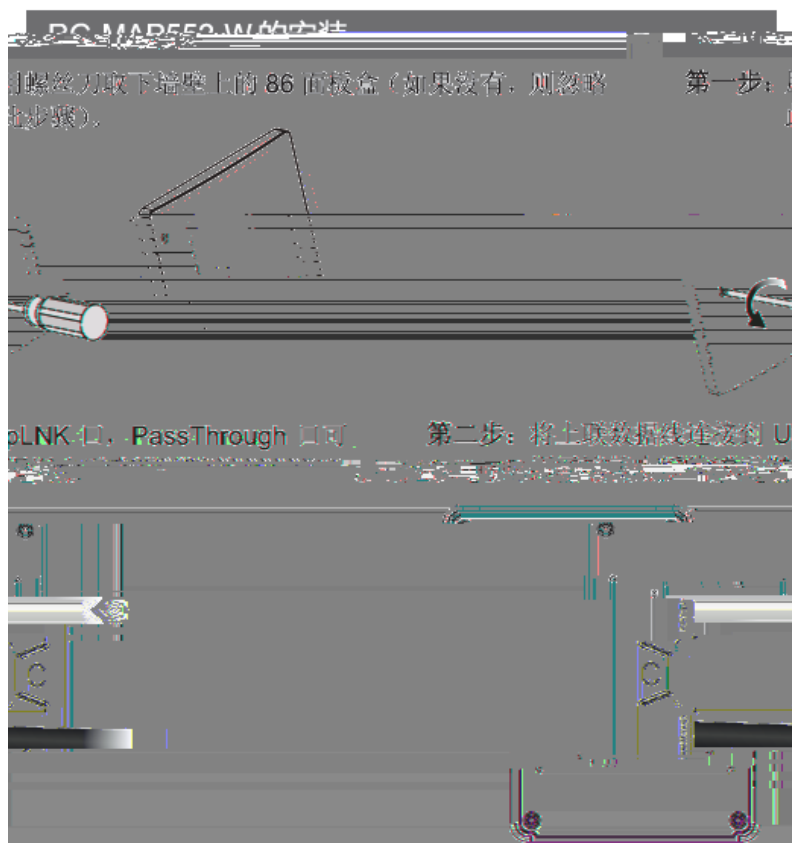

第二步：将MAP552-W左右两边的螺丝孔对准86底盒里的螺丝



I AP



♪ AP

♪		2.5Hz	AP	
♪		0.25Hz	2s 2s	AP
♪	MS			
	4		3.8s	0.2s
AP		MS		
fi		(2.5Hz):		LED ON





♪ + AP AP AC
 ♪ AP AP ruijie enable
 apdebug
 ♪ AP AP session slot slot-id AP
 AP debug
 fi AP show dvmg stae AP

```
Ruijie#show dvmg state
```

index	slot-id	turn	dev-state	online-time	next-execute-time	ifname	mac	ip
online	0-2-2-21	0-2-2-49	5	5869 6c14 b799	1	13	CARD	Run


```

+      AP      AP      AP  AP
      AP
      FLASH      11.1 B9P2      AP
      AP      AM5514&AM5528      AP(MAP552-W
MAP552\MAP552-S )      AC      AP      AP
AP      AP
Ruijie(config)# ac-controller
Ruijie(config-ac)# active-bin-file am5528.bin
Ruijie(config-ac)# active-bin-file map552s.bin
Ruijie(config-ac)# ap-image auto-upgrade

```

```

Ruijie#show tftp-server updating-list

```

Tftp Address	Interface	File Name	File Size	File Type	File Path
192.168.1.1	GigabitEthernet0/24	am5528.bin	1048576	bin	/var/tftp
192.168.1.1	GigabitEthernet0/24	map552s.bin	1048576	bin	/var/tftp

AC AP show
 yhuvlrq < vorw + AP

```
PJ13AC#show ver all slot
AP(19#4F_new-AM5528-1)'s version:
Product ID : AM5528
System uptime : 0:27:3
Hardware version : 1.00
Software version : 1.00
AP(19#4F_1fen24)'s version:
Product ID : AM5528
System uptime : 0:27:3
Hardware version : 1.00
Software version : 1.00
```

www.ruijie.com.cn

www.ruijie.com.cn/service.aspx

support.ruijie.com.cn

webchat.ruijie.com.cn

4008-111-000