:

:

RG-AP520(DA) 60°

: ,

, ,

IP43 : ,

AP520DA AP AP

-15dB

AP

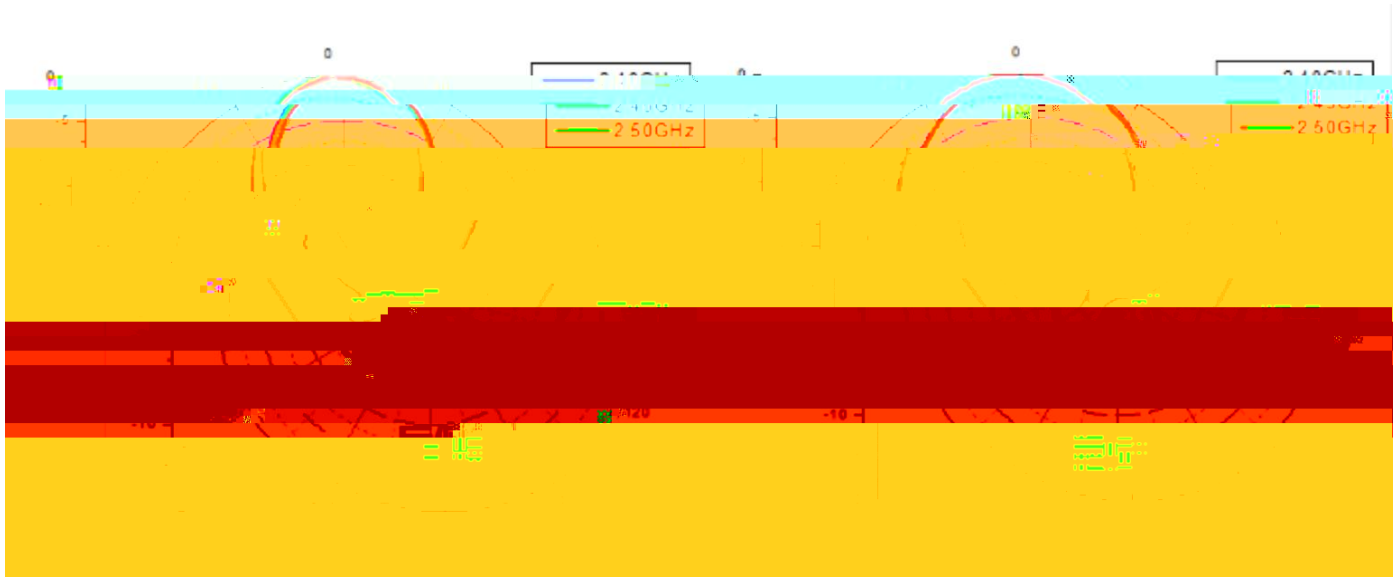

AP
30
AP
50

iPhone6
plus
40Mbps

: AP

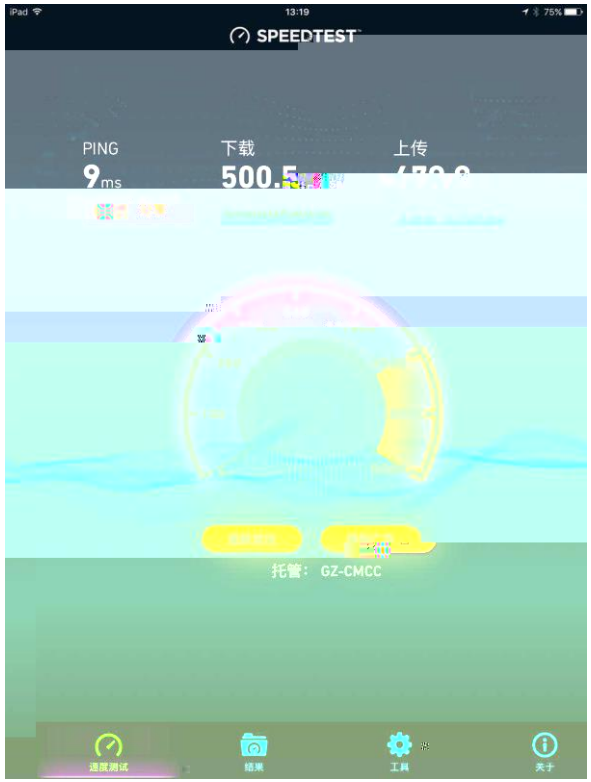

500kBps 4M ping

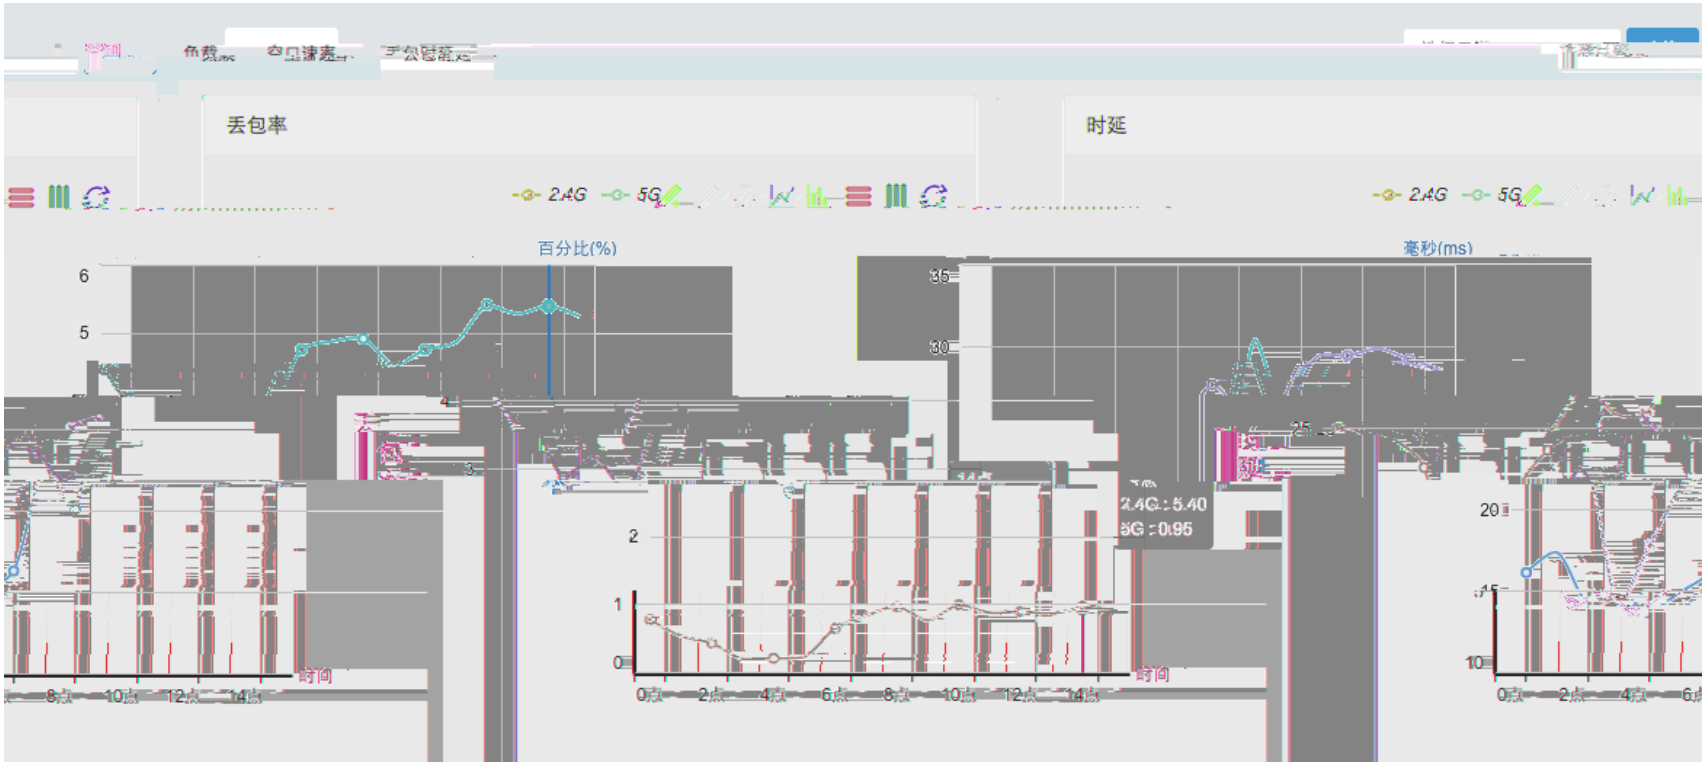

WIFI

3650

3 AP520-I AP520DA

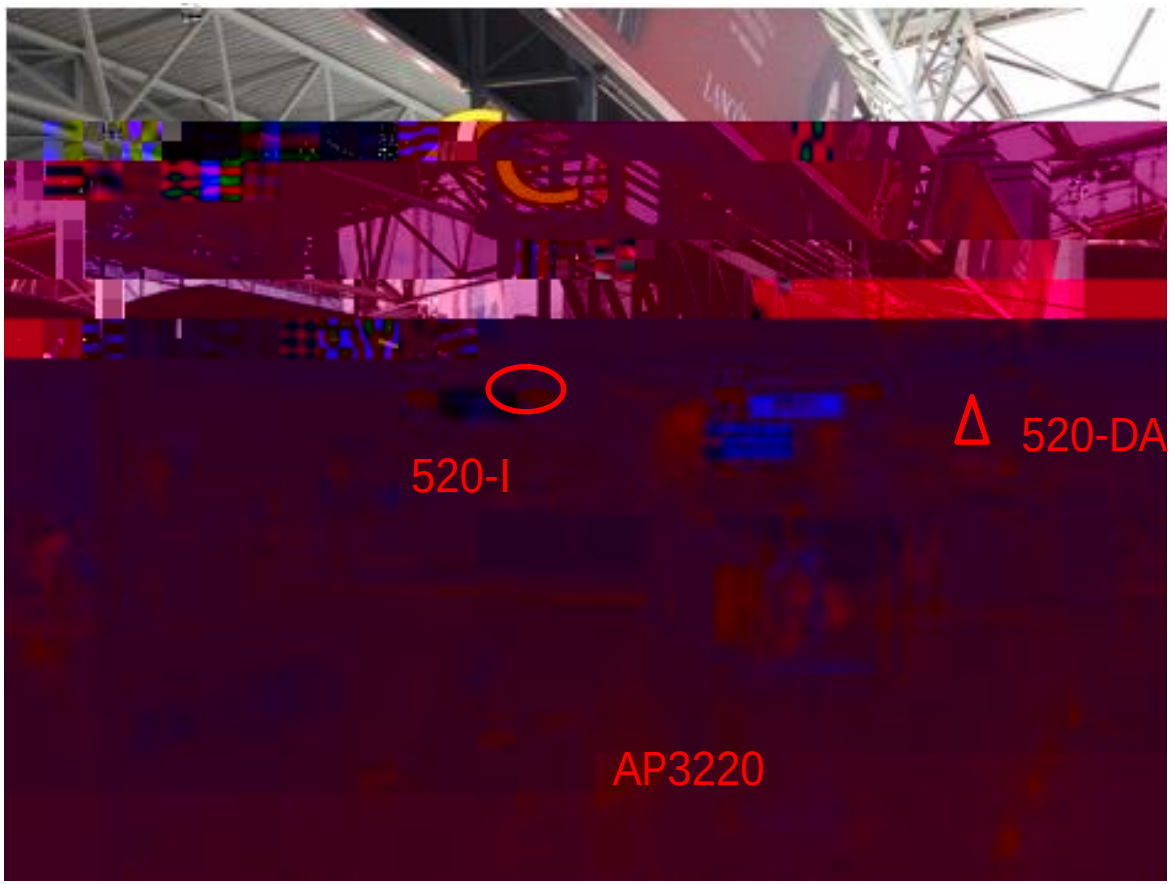

30 0

AP 30 0 AP520DA

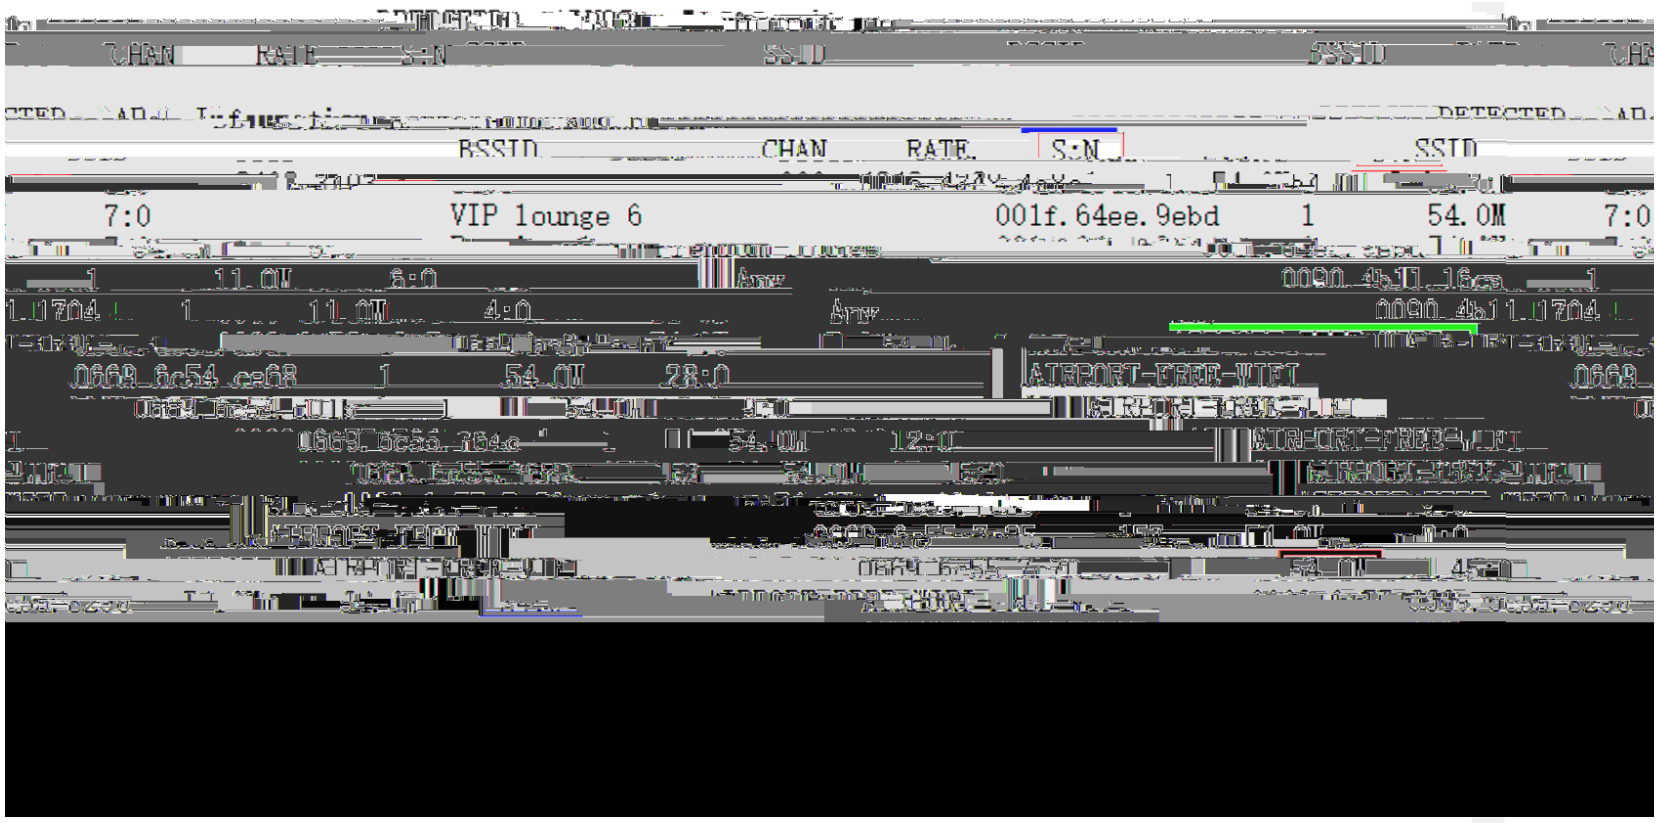

RG-AP520(BT)	4.0	802.11ac

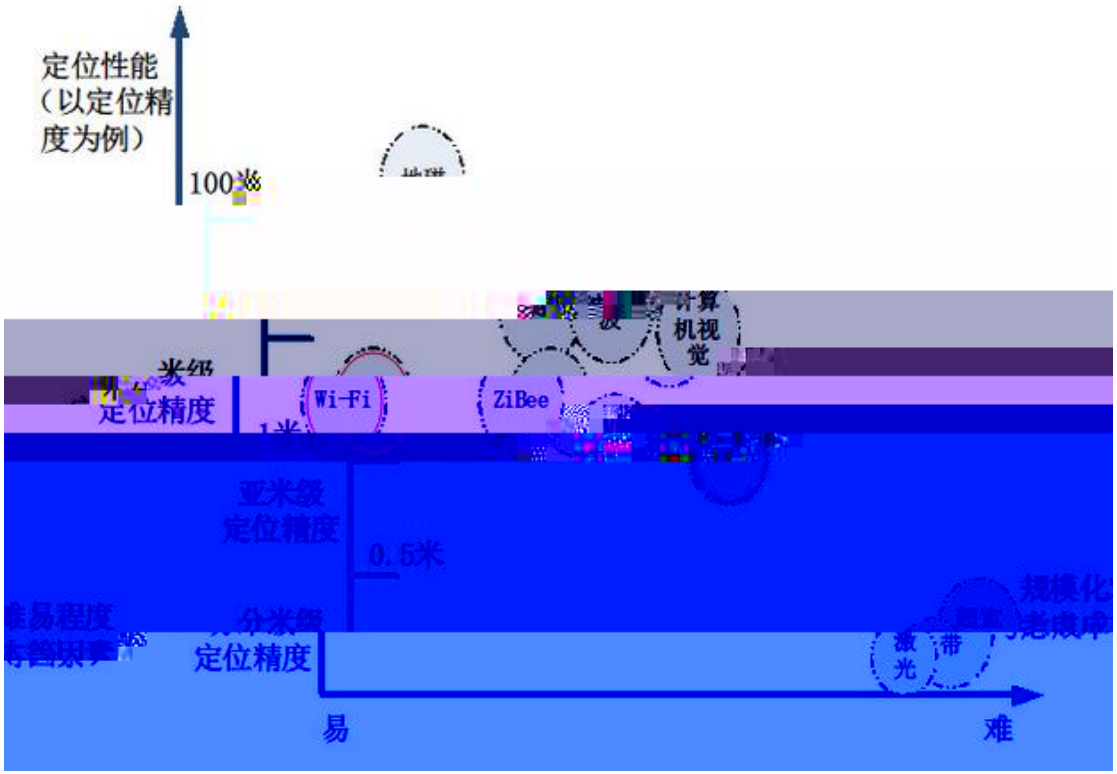

“

”　BLE

Beacon　　BLE

ID

ID

ID

iBeacon

商户进入微信公众号
Store
（4）微信服务器推送信息到用户微
将从微信
后台申请到
（2）
AP520

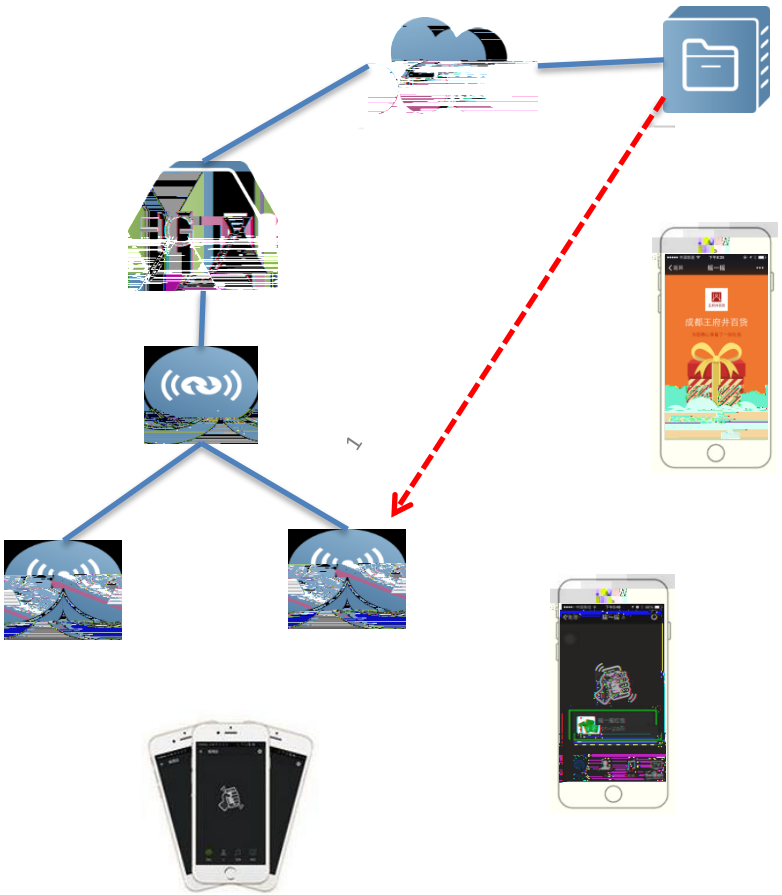
成都王府井百货

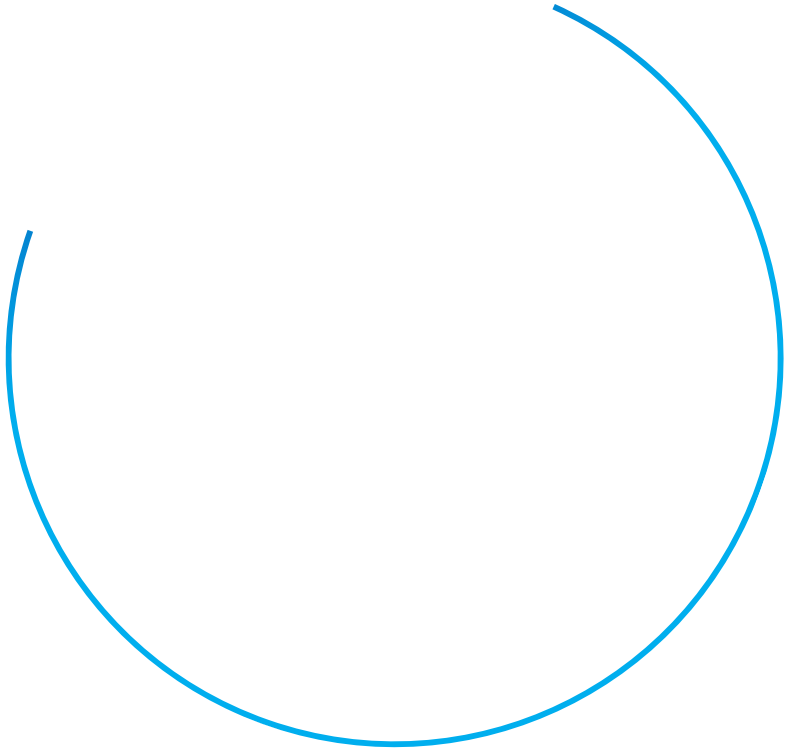

Ibeacon

AP ibeacon ibeacon uuid uuid major major minor minor ibeacon uuid uuid major major minor minor

uuid	uuid	16	32
Major:	major	16	4
Minor :	minor	16	

AP no ibeacon

Ibeacon

4.0

nRF Master Control Pannel

scan

ibeacon

距离（米）	0.5	5	10	15	20	25	30
-90	[illegible]	-68	-74	-82	-88	-94	-94

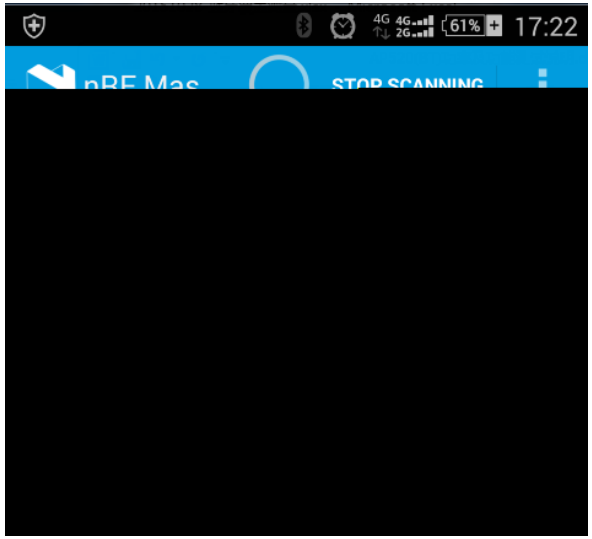

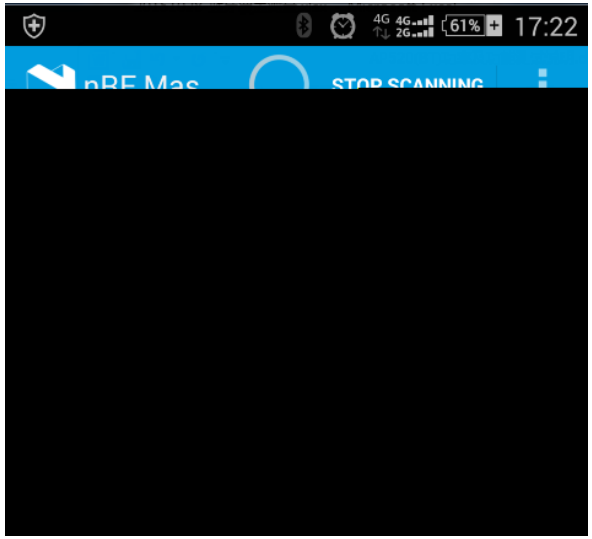

Ibeacon

“ IOS7+ ” “ 4.3+" "
4.0+"

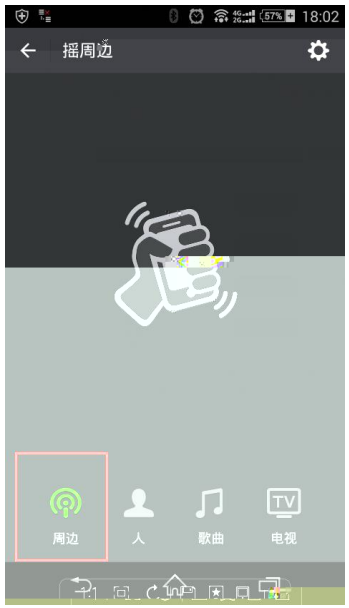

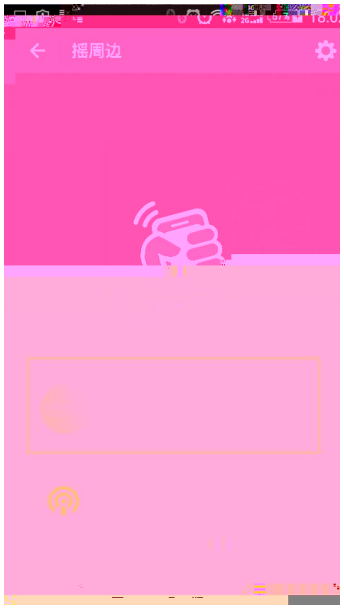

AP520-I G2 X-sense 3 AP
AP /

AP 2

POE AP520-I(G2) 1 POE AP520-I(G2)

AP520-I(G2) 2 MAP552(SR) 1 AP520-I(G2) MAP MAP552(SR)

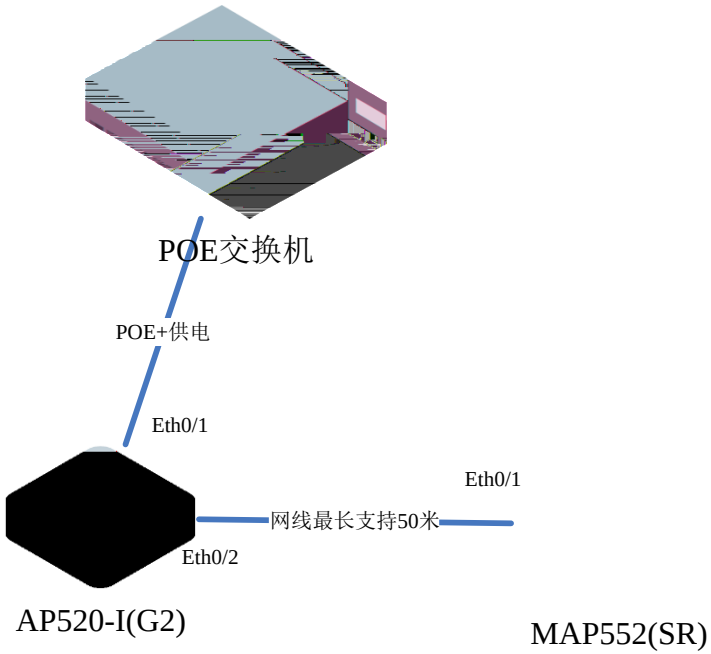

MAP552(SR)　　AP520-I(G2)
LICENSE

, AP-GROUP

LICENSE

MAP552(SR) LICENSE

AP520-I(G2)

MAP552(SR)

AP520-I(G2) AP-NAME MAP552(SR) XXX-SR AP520-I(G2) 520g2 MAP552(SR) 520g2-SR

MAP552(SR) MAP552(SR) MAP552(SR)
MAP552(SR) MAP552(SR)

.

AP520-I(G2) MAP552(SR) AC show ap-sr summary AP AP

```
Ruijie#sh ap-sr summary
---------- show ap status ----------
t-sel:0x0 t-sel:0x0
Command executed successfully

AP sr number: 1

AP Name                                  IP Address      Mac Address     Master AP       Radio  Radio  State
---------------------------------------- --------------- --------------- --------------- ------ ------ ------
520g2-sr                                 192.168.1.56    00d0.f822.3576 00d0.f822.33dd 1     0 2     0 Run
```

AP520-I(G2)　　MAP552(SR)

AP520-I(G2)　　MAP552(SR)　　AP520-I(G2)　　MAP552(SR)

MAP552(SR)

AP520-I(G2)　　MAP552(SR)

AP

AP520-I(SR)

CAPWAP

MAP552(SR) LICENSE AC CAPWAP AC CAPWAP 4K

IP

MAP552(SR) IP IP IP

AP520-I(G2) POE AP520-I(G2)+MAP552(SR) POE+ MAP552(SR)

AP520-I(G2) 12W AP520-I(G2)+ +MAP552(SR) 24W AP

AP520-I(G2) MAP552(SR) RJ45 50

www.ruijie.com.cn

www.ruijie.com.cn/service.aspx

support.ruijie.com.cn

webchat.ruijie.com.cn

4008-111-000