

RG-AP730(TR) 产品介



目录

Contents

产品概

产品形

典型

应用

RG-AP730 TR

802.11ac wave2

AP

5G

1.73Gbps

2.4G

400Mbps(

11ac

)

2.6Gbps

RG-AP730(TR) 11ac wave2 3

/

AP530-I V1.5X

AP530

V1.1X

RG-AP730

概

1000Base-T

AP

100

100m

PoE+(802.3at)

DC48V,0.6A

RG-

目录

Contents

产品概

产品形

典型


应用

AP产品形



2 (LAN1 802.3at(POE+)
,LAN2)
400M+866.5M+866.5M
iBeacon
USB2.0
DC48V

AP

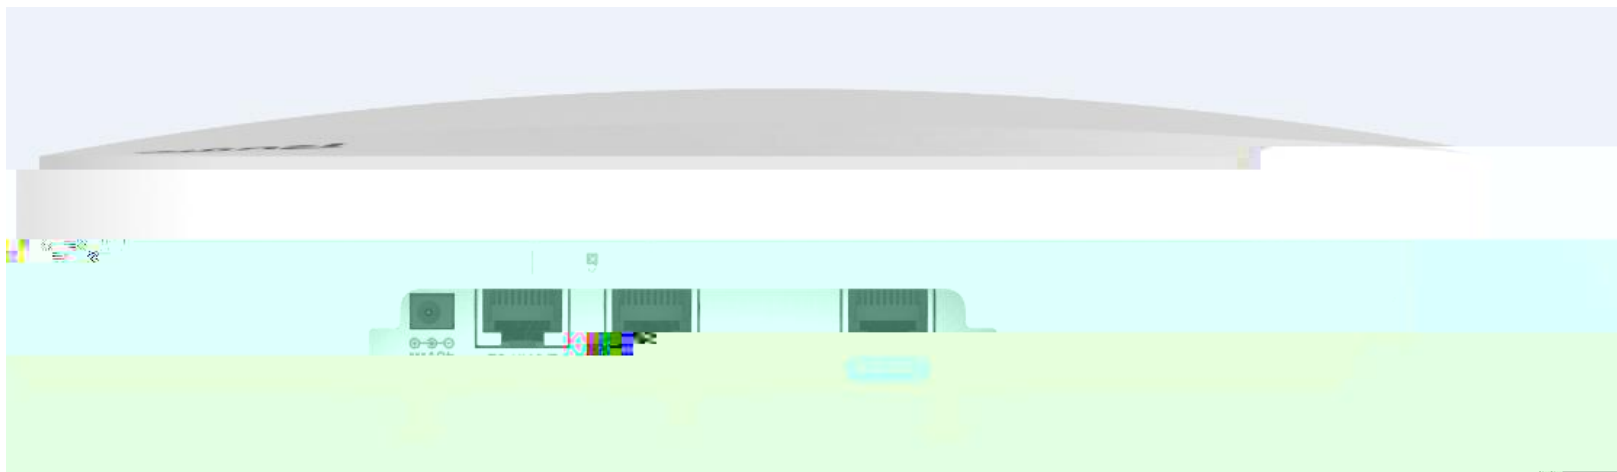

DC 48V

LAN1

LAN2

RJ45 Console

AP



Reset

—	AP /	
3Hz	AP uboot	
—	AP	
3Hz 3	AP Link down	
—	AP CAPWAP	
3Hz	AP	
—	AP	

目录


Contents

产品概

产品形

典型

应用

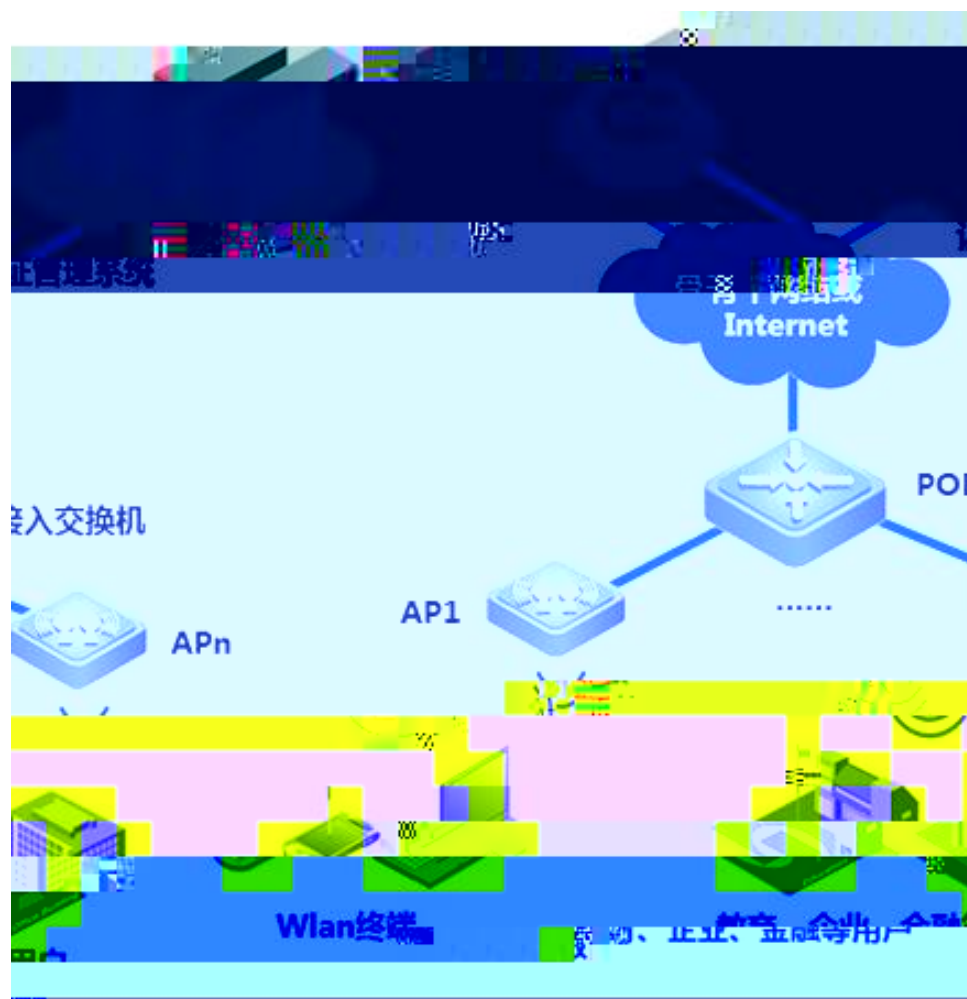

助服务

www.ruijie.com.cn

www.ruijie.com.cn/service.aspx

support.ruijie.com.cn

技术支持