




WEB

copyright © 2017

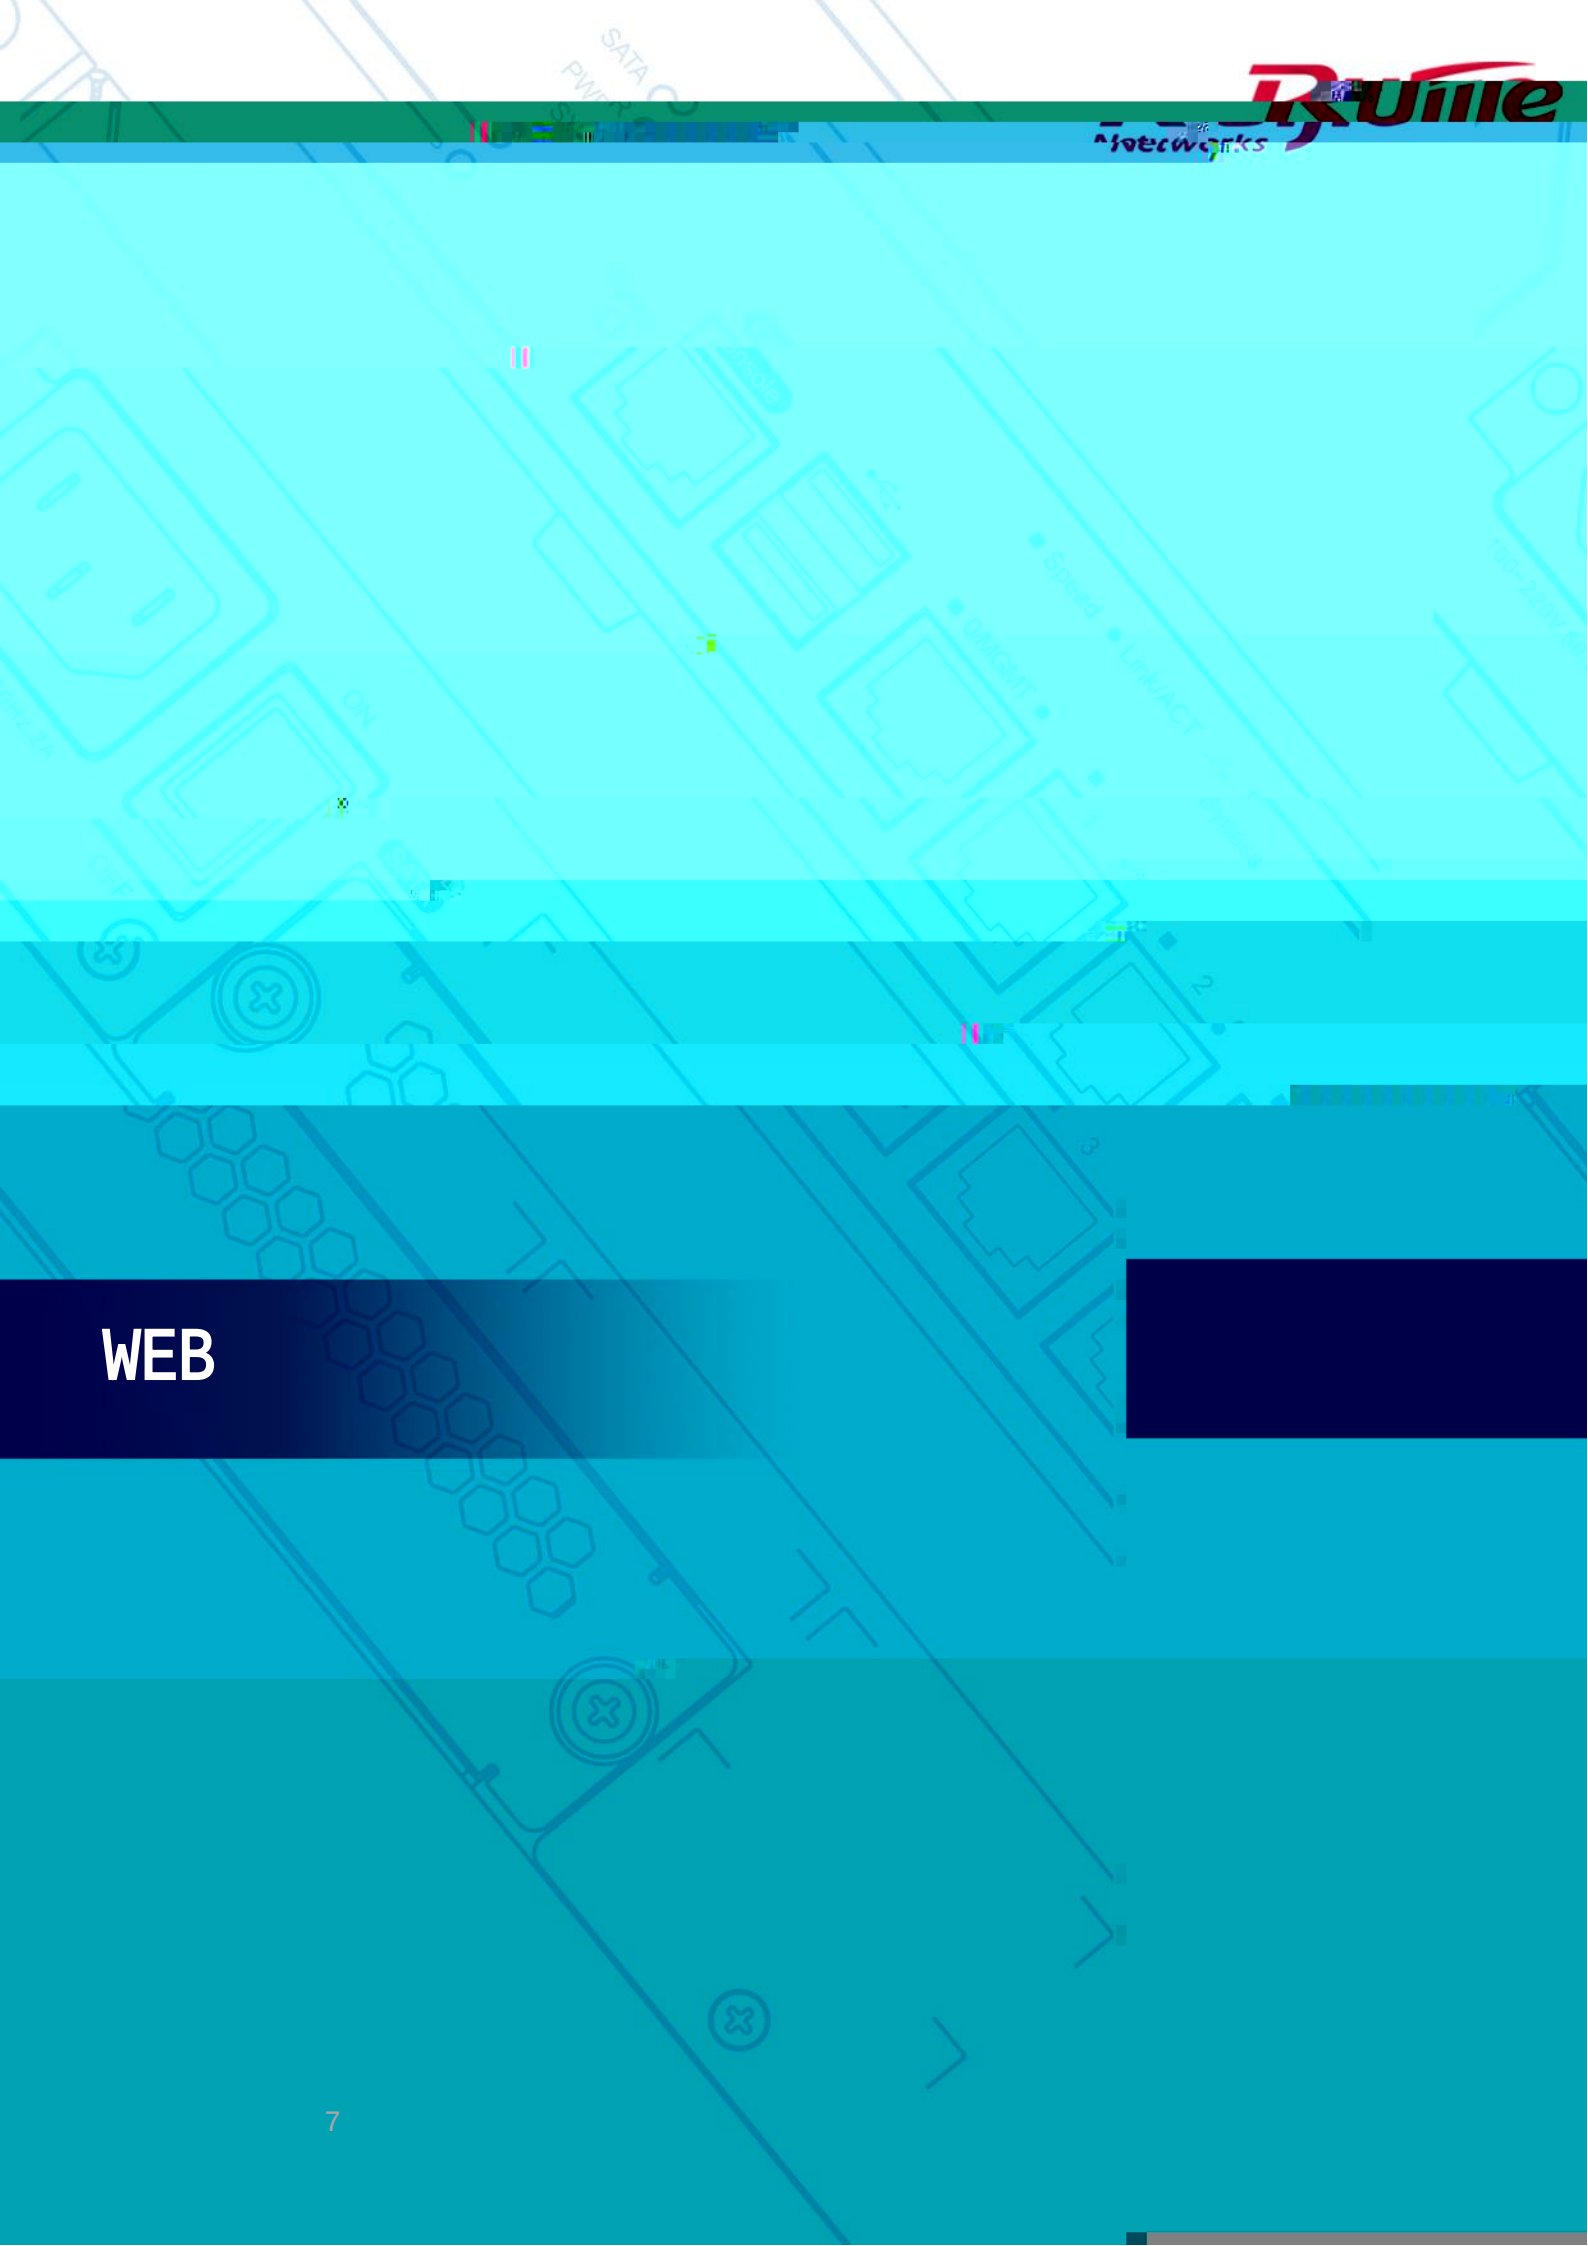

-
-
-

-

<http://www.rui>



/



- WEB WEB AP WEB AP PC
- IPAD

- IE9.0 IE10.0 IE11.0 Chrome IE 360
- WEB

! ,IE6,7,8 IE9 10 11 Chrome FF

- 1024*768 1280*1024 1440*960

- WEB ()
- WEB ()
- IP (LAN 192.168.110.1)



WEB

WEB	

WEB


IP

admin

http://ip

<http://192.168.110.1>



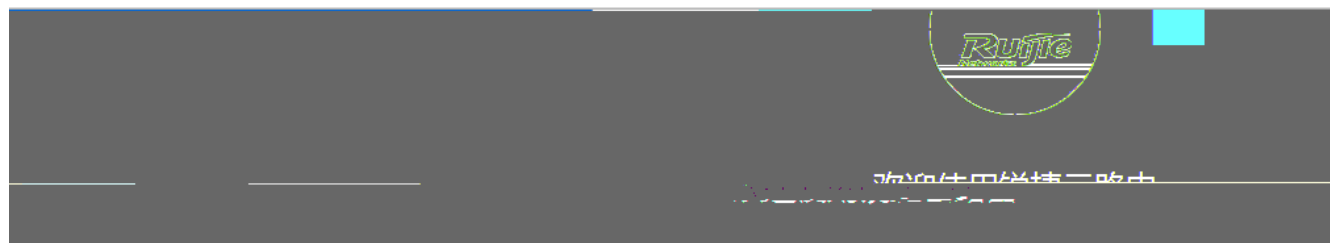

管理密码

管理密码

当前密码是admin, 建议

下一步

返回上一步



1-2. DHCP

三网设置




WiFi

1.3.1.2



场景选择

F初次使用的用户。

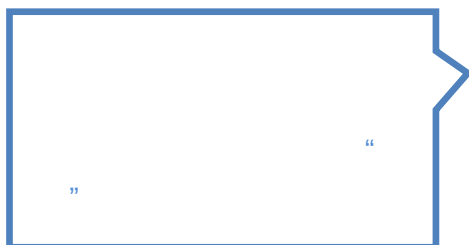☐ 需要初始配置

通过简单的初始配置操作，对几个重要的参数进行配置。适合于

☒ 直接进入系统

希望直接进入系统，配置所需操作。适合于熟悉系

下一步

1.3.3

1.3.3.1

上网设置

PPPOE DHCP

联网类型

静态地址 ▼

IP地址

192.168.23.180

子网掩码

255.255.255.0 ▼

网关地址


192.168.23.1

DNS服务器


114.114.114.114

保存&应用

PPPOE

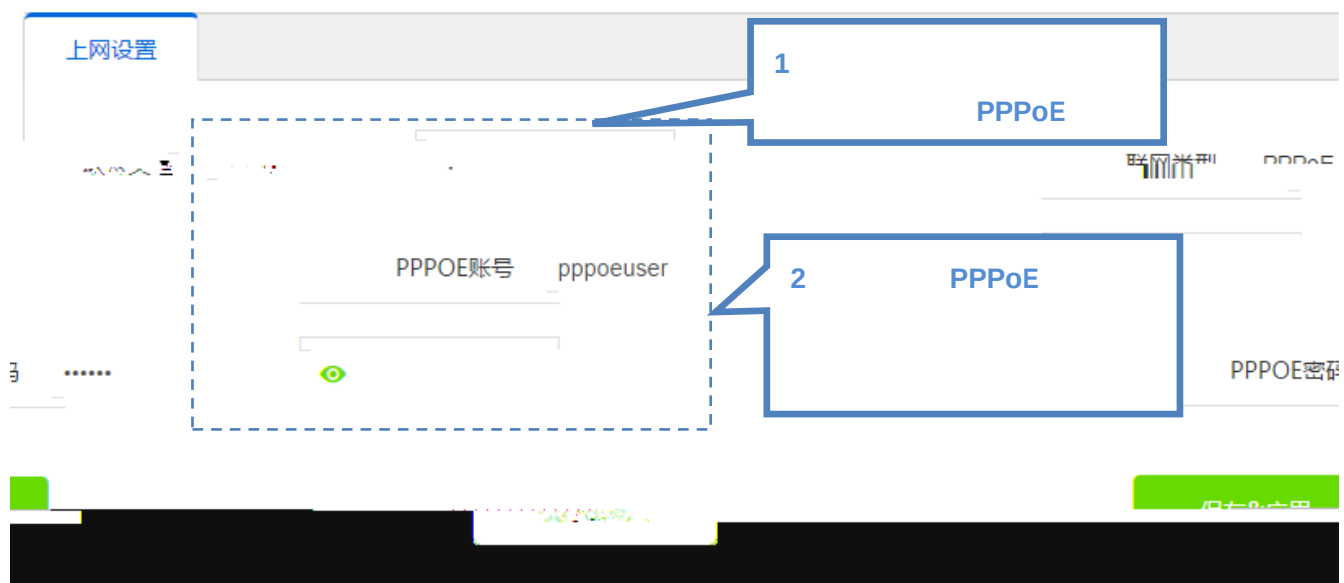

DHCP

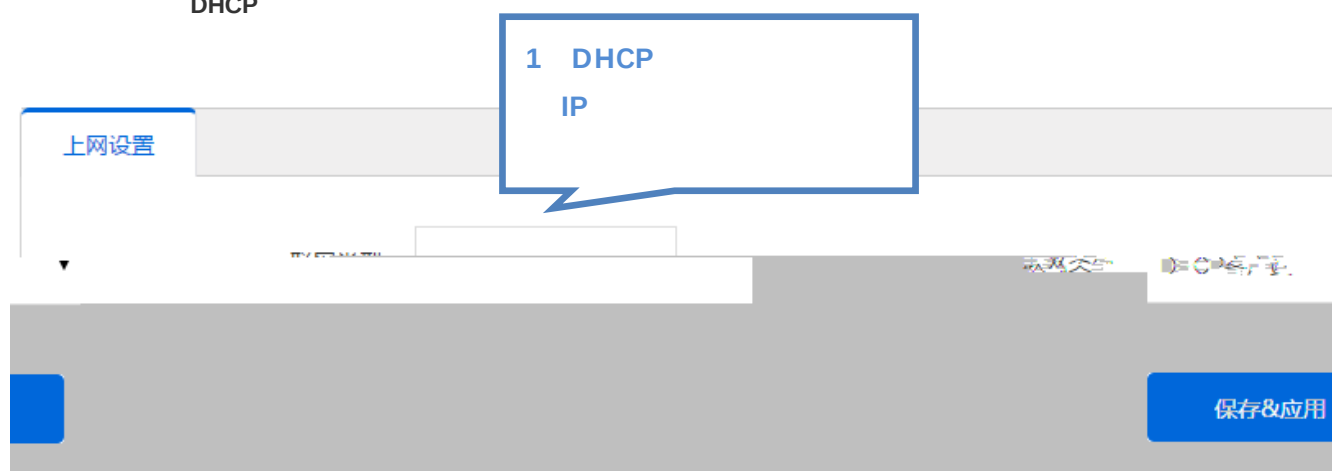

WAN

1.3.3.2

有线内网设置

无线内网设置

内网口IP地址

192.168.112.165

子网掩码

255.255.255.0

可以分配的IP数

151

租用时间(分钟)

480

保存&应用

有线内网设置

无线内网设置

内网口IP地址

192.168.120.1

子网掩码

255.255.255.0

关闭DHCP服务 ☐

分配的开始IP

192.168.120.

100

可以分配的IP数

151

租用时间(分钟)

5

保存&应用

DHCP

IP

DHCP

PC

IP

1.3.3.3 WiFi

WiFi设置

说明：修改WiFi设置需要重启无线模块进程，因此导致已关联的终端要重新关联上设备，出现短暂的断网是属于正常现象。

2.4G WiFi列表

否

否

修改 | 删除

是否加密

是否隐藏

操作

否

否

修改 | 删除

+ 添加WiFi

信道：自动, 强度：穿墙 修改

名称

ruijie_RG-EG150

WiFi

2.4G 5G 4 WiFi 2.4G WiFi 4

1-13

1.3.3.4 WEB

Wifidog



WiFi

基本设置 高级设置 访问规则

☒ (注：WEB认证作用于WiFi热点ruijie_RG-EG150)

Web认证类型 WiFi

有线口认证 ☐

Portal认证URL

Portal服务器网址：例如WifiDog默认为http://112.124.31.88/auth/wifidogAuth

Portal认证地址

Portal服务器IP地址：例如WifiDog默认为112.124.31.88

AC

基本设置 高级设置 访问规则

启用web认证 ☒ (注：WEB认证作用于WiFi热点ruijie_RG-EG150)

Web认证类型 portal EG150+ AC+ portal AC NAS

Portal服务器网址：例如WifiDog默认为http://112.124.31.88/auth/wifidogAuth

Portal服务器网址：例如WifiDog默认为http://112.124.31.88/auth/wifidogAuth

Portal服务器地址 NAS AC IP

中移动规范设备名称(可选)

云AC通信密钥 AC

基本设置

高级设置

访问规则

网站IP白名单

+

直通目的IP地址

网站URL白名单

www.ruijie.com.cn

+

直通目的网站URL

网站URL黑名单

www.173.com

+

拦截目的网站URL

用户IP白名单

+

直通源IP地址

用户MAC白名单

11:22:33:44:55:66

+

直通源MAC地址

Web

1.3.3.5

无线定位

启用无线定位

IP

无线定位端口


12092

保存&应用


1.3.3.6

1.3.4

1.3.4.1

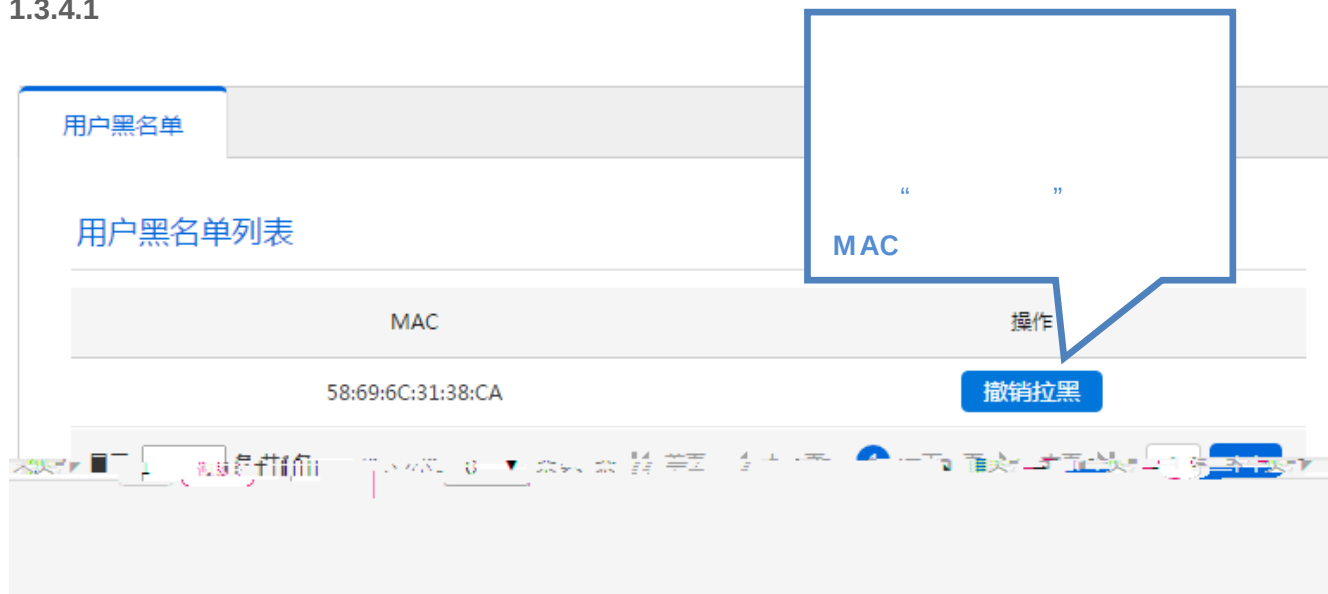

1.3.4.2 QOS

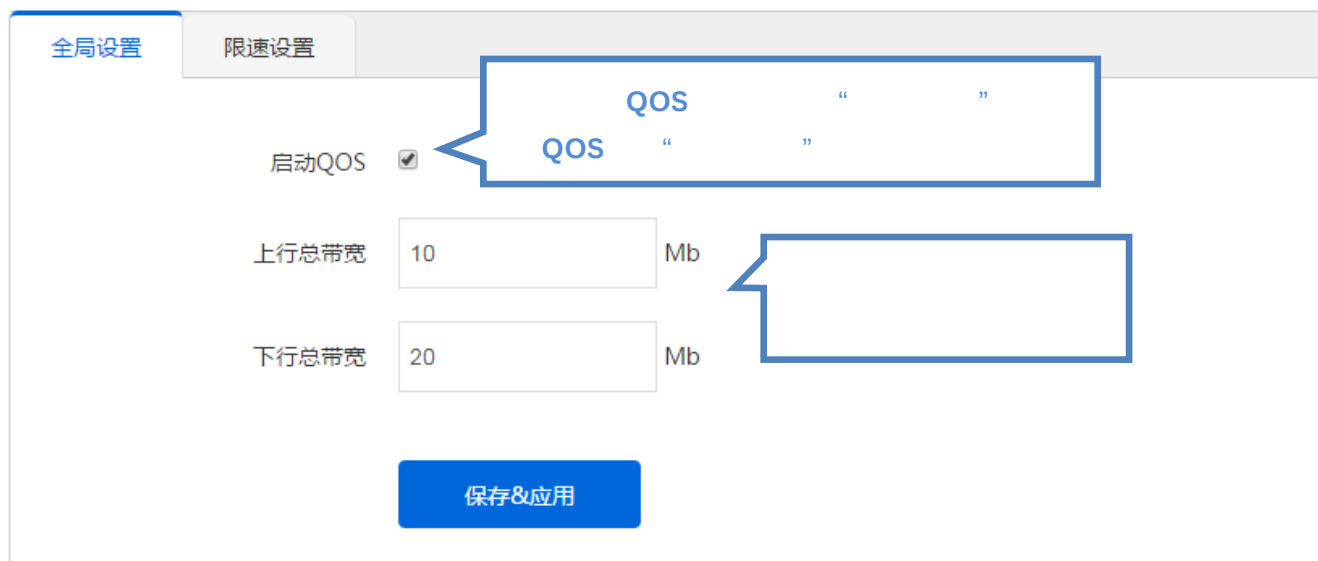

全局设置

限速设置

删除

添加

IP地址或网段

kbit/s

kbit/s

kbit/s

kbit/s

保存&应用

IP

IP

QOS


QOS

1.3.4.3 CWMP

ACS URL

1.3.4.4

1.3.4.6

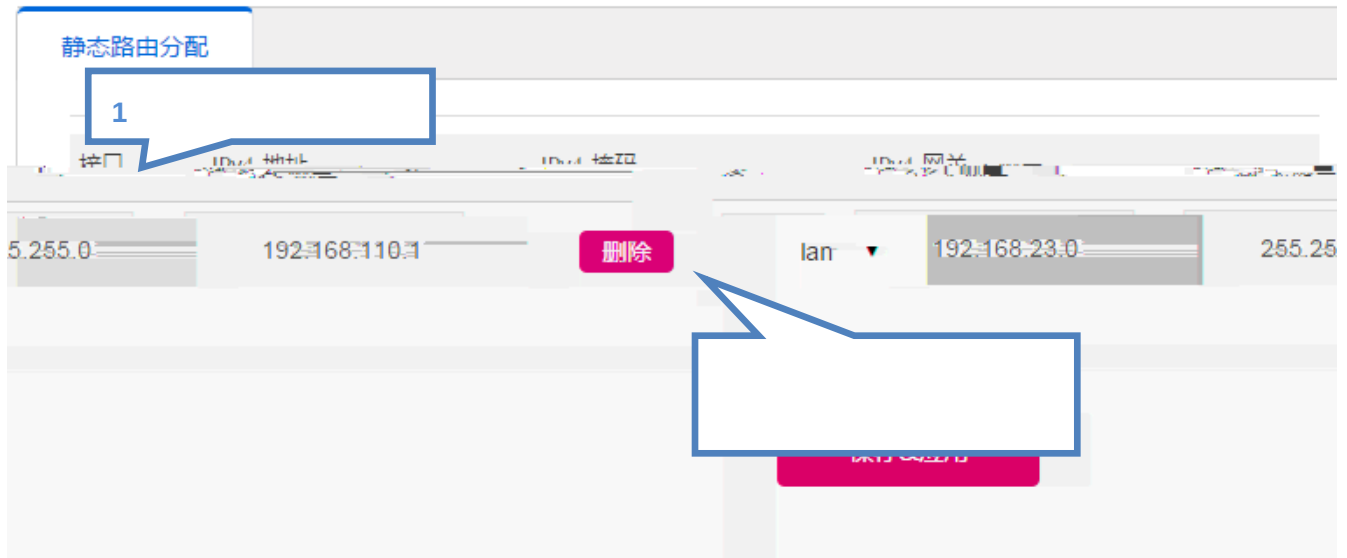

Ipv4-

1.3.4.7 ibeacon

蓝牙ibeacon

UUID ? 使用格式 FDA50693-A4E2-4FB1-AFCF-C6EB07647825

Major ? 范围 0 ~ 65535

Minor ? 范围 0 ~ 65535

1.3.4.8

The screenshot shows a network diagnostic tool interface. At the top, there are three tabs: "一键搜集" (One-click Collection), "网络诊断" (Network Diagnosis), and "抓包诊断" (Packet Capture Diagnosis). The "网络诊断" tab is selected.

Below the tabs, there is a section titled "一键搜集故障信息" (One-click Collection of Fault Information). This section contains three sub-sections: "Ping", "Traceroute", and "Nslookup".

The "Ping" section is expanded, showing a list of IP addresses and their corresponding ping results. The results are displayed in a table format with columns for IP address, ping time, and packet loss. The table shows the following data:

IP Address	Ping Time (ms)	Packet Loss (%)
111.13.100.92	46.133	0
111.13.100.92	63.337	0
111.13.100.92	145.107	0
111.13.100.92	14.681	0

Below the table, there is a section titled "w.baidu.com ping statistics ---". This section contains the following text:

```

ets transmitted, 5 packets received, 0% packet loss
trip min/avg/max = 46.133/85.406/145.107 ms

```

On the right side of the interface, there is a section titled "11.13.100.92: seq 62 64 66 68 70". This section contains the following text:

```

--- www
5 pack
round-

```

Annotations in blue boxes highlight specific parts of the interface:

- A box labeled "Ping Traceroute Nslookup" points to the three sub-sections in the "一键搜集故障信息" section.
- A box labeled "ping ip" and "Ping" points to the "Ping" sub-section.
- A box points to the "Ping" sub-section.



1.3.5

1.3.5.1



1.3.5.2



1.3.5.3 /

/
