

WEB

RGOS11.9(6)B1P3

V1.0

copyright © 2020



<http://www.ruijie.com.cn/>

<http://ocs.ruijie.com.cn>

<http://www.ruijie.com.cn/fw/>

7×24

4008-111-000

<http://bbs.ruijie.com.cn/portal.php>

<http://www.ruijie.com.cn/fw/wt/>

4008111000@ruijie.com.cn

1.

[] []

{ x | y | ... }

[x | y | ...]

//

2.






/

3.

1 AP-Eweb

1.1

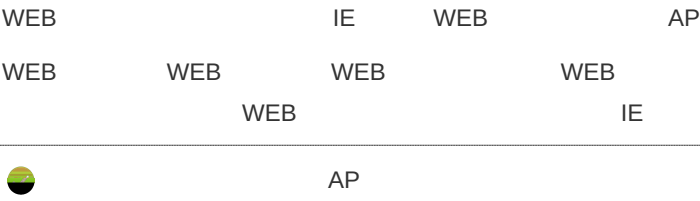

1.2

<u>WEB</u>	WEB

1.2.1 WEB



WEB

1-1



WEB
WEB HTTP AJAX

WEB WEB WEB PC
IPAD
IE9.0 IE10.0 IE11.0 Google chrome IE 360
WEB
1280*1024 1920*1080 1440*960

AP WEB
AP WEB
AP IP


WEB

WEB	
IP	192.168.110.1


/	
admin / admin	



WEB IP IP IP http://ip
<http://192.168.110.1>

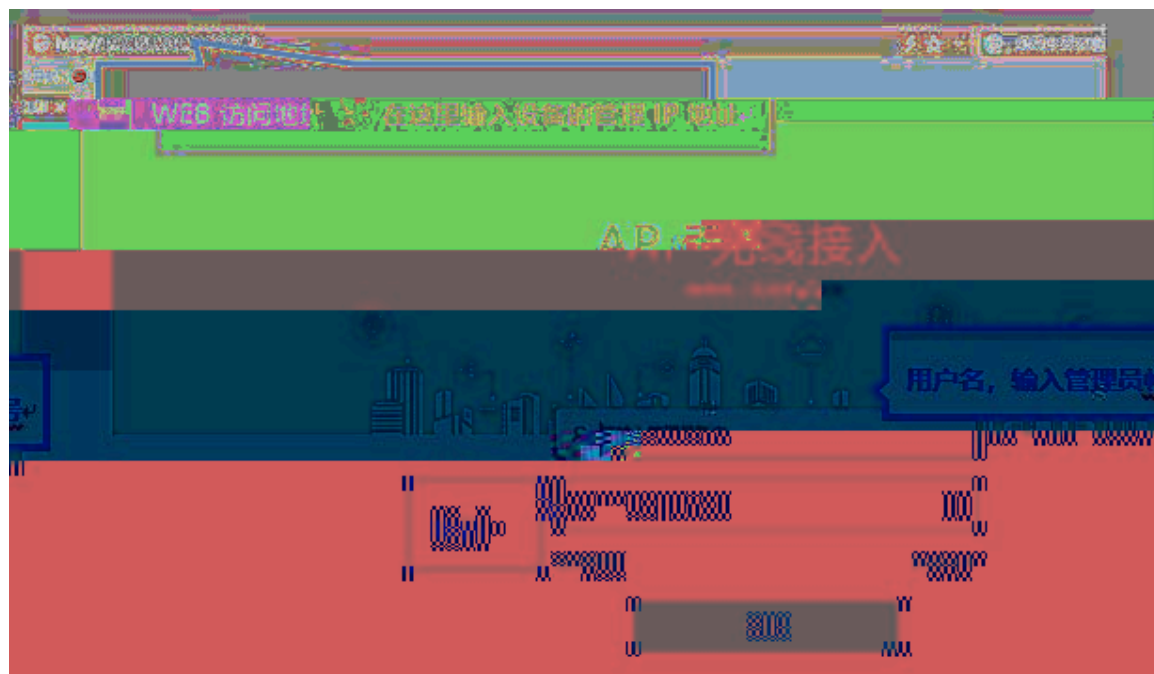

< >

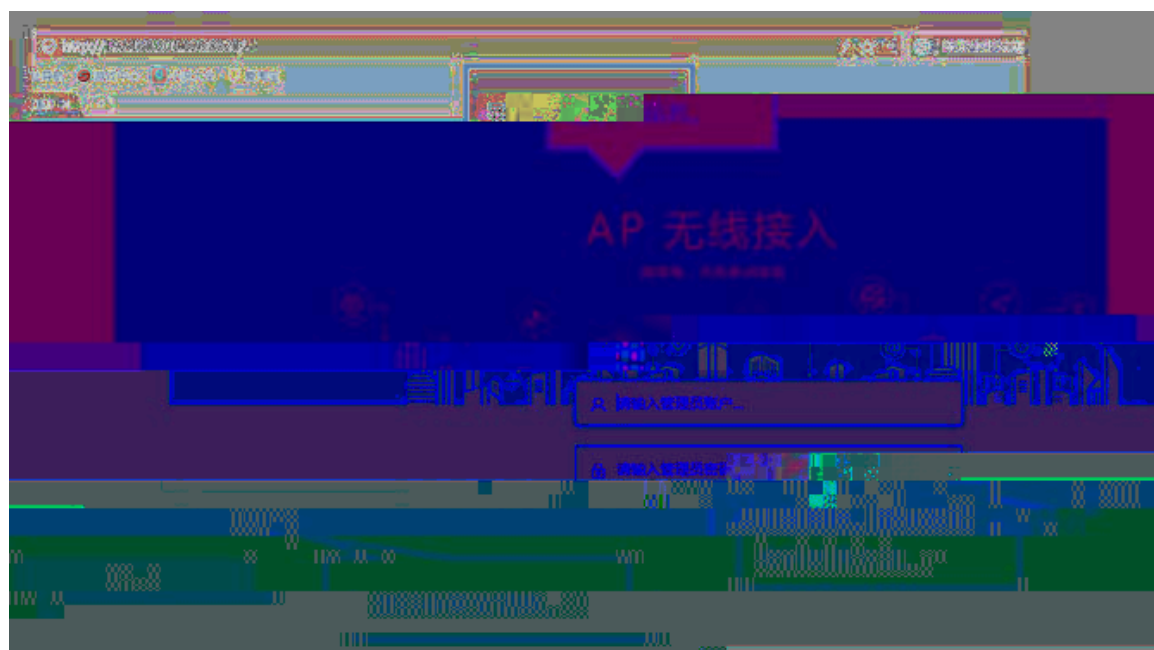

10

5

10

10

1.3 AP-Eweb

1.3.1

Wi-Fi

Wi-Fi .



AP

VLAN:

vlan

(vlan IP) DHCP(vlan dhcp)

AP

WAN

(vlan IP) DHCP(vlan dhcp) PPPOE

-IP

WAN IP

-

WAN IP

-


PPPOE -

PPPOE

PPPOE -

PPPOE

DHCP-

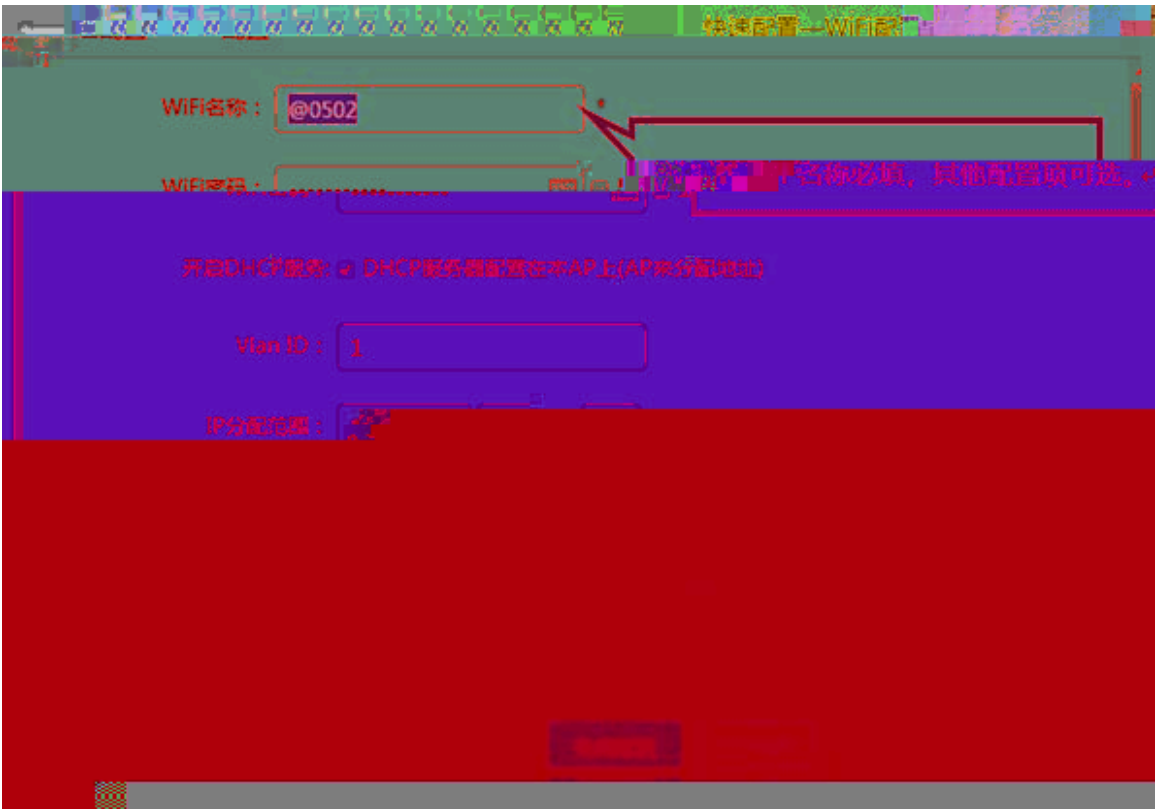

Wi-Fi

SSID

Wi-Fi

Wi-Fi WAP/WAP2

DHCP

DHCP

VLAN ID

VLAN

IP

DHCP

DHCP

DNS

DNS


DNS

DNS


1.3.2

1.3.2.1 AP

“ ” AP AP MAC AP

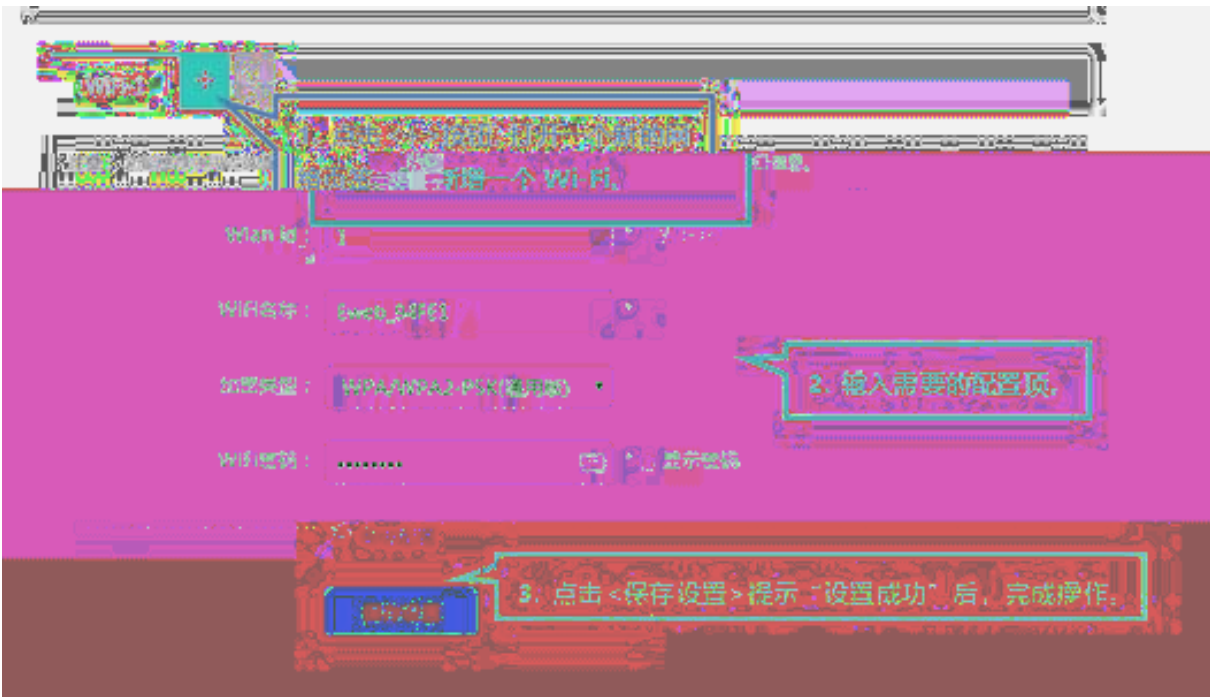

1.3.2.2

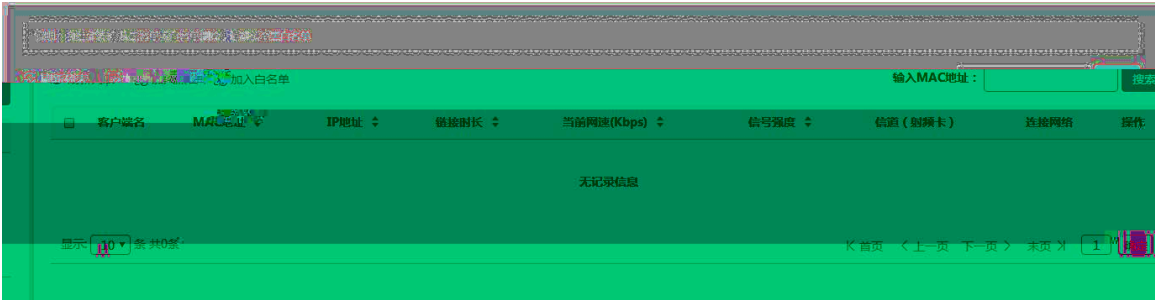


1.3.2.3 DHCP

DHCP DHCP DHCP


1.3.2.3.1 DHCP

AC

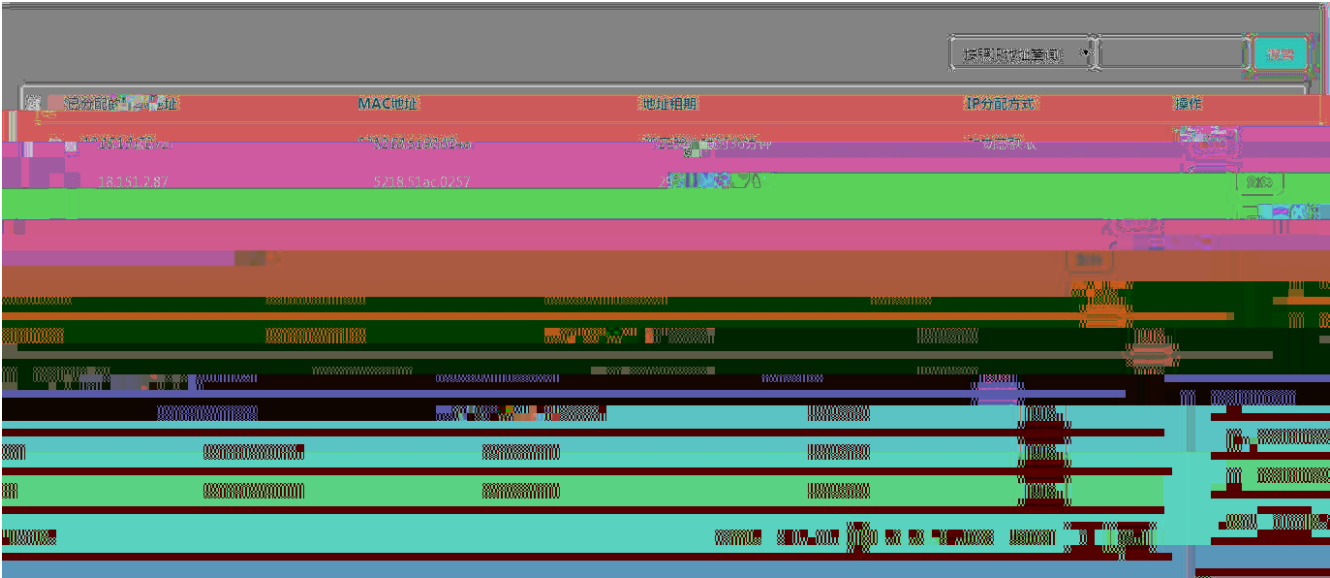

1.3.2.3.2 DHCP

DHCP

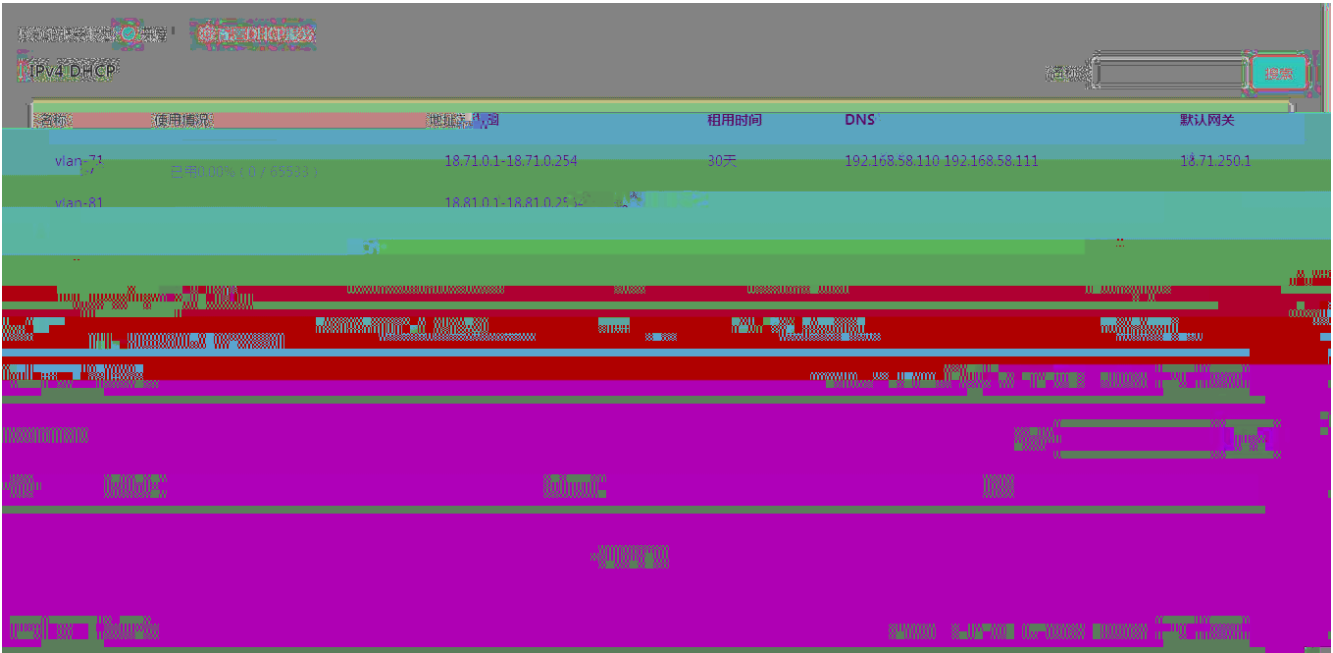


1.3.3

1.3.3.1

1.3.3.1.1

Wi-Fi AP

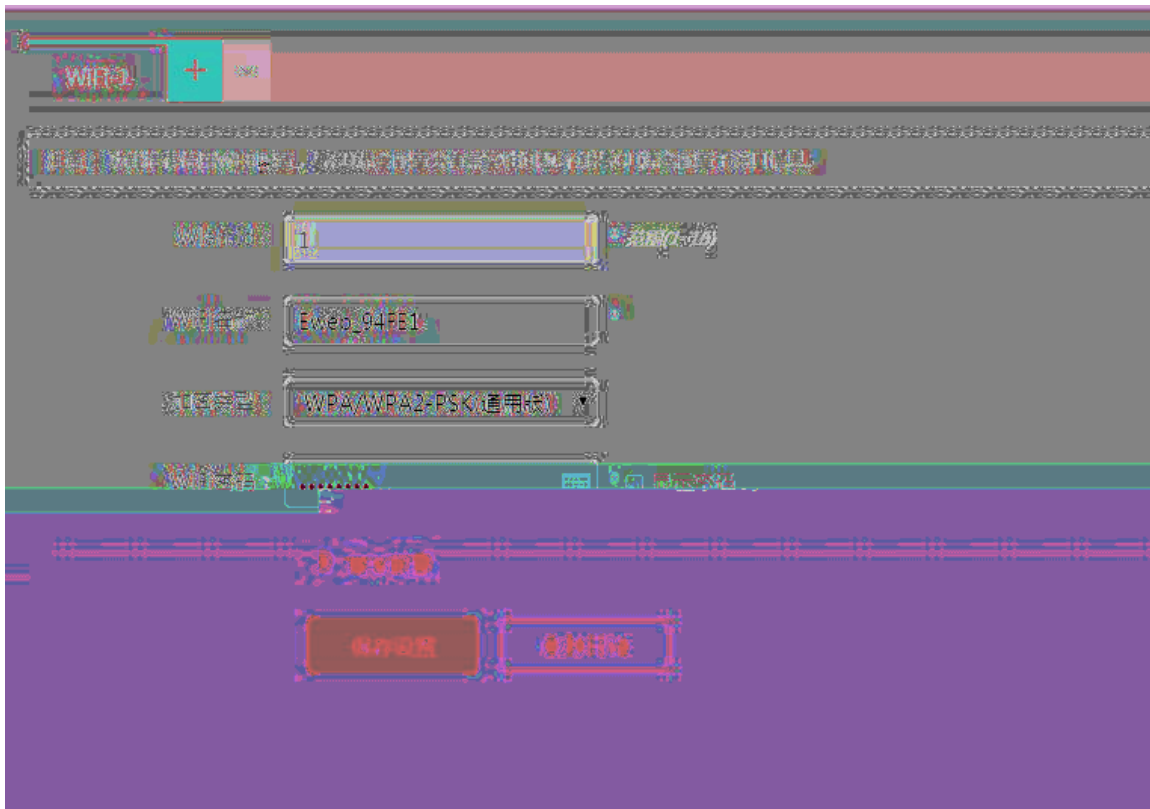

Wlan id

Wi-Fi

SSID

Wi-Fi

WPA/WPA2-PSK

WPA

WPA/WPA2-802.1x

Radius

WPA

WPA2

Wi-Fi**Wi-Fi**

SSID

SSID

UTF-8:

UTF-8

WEB

UTF-8

UTF-8

GBK:

PC

GBK

Wi-Fi

radio1

2.4G

vlan

wlan



wlan qos wlan based * per user limit up streams average data rate ** burst data rate **

wlan qos wlan based * per user limit down streams average data rate ** burst data rate **

5G

5G

5G

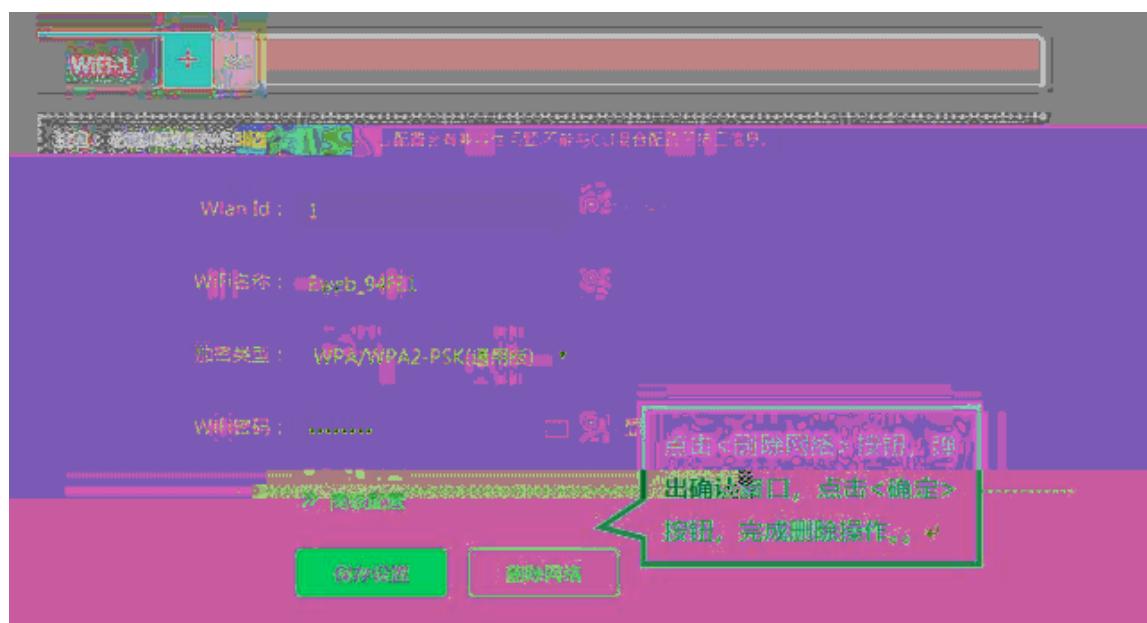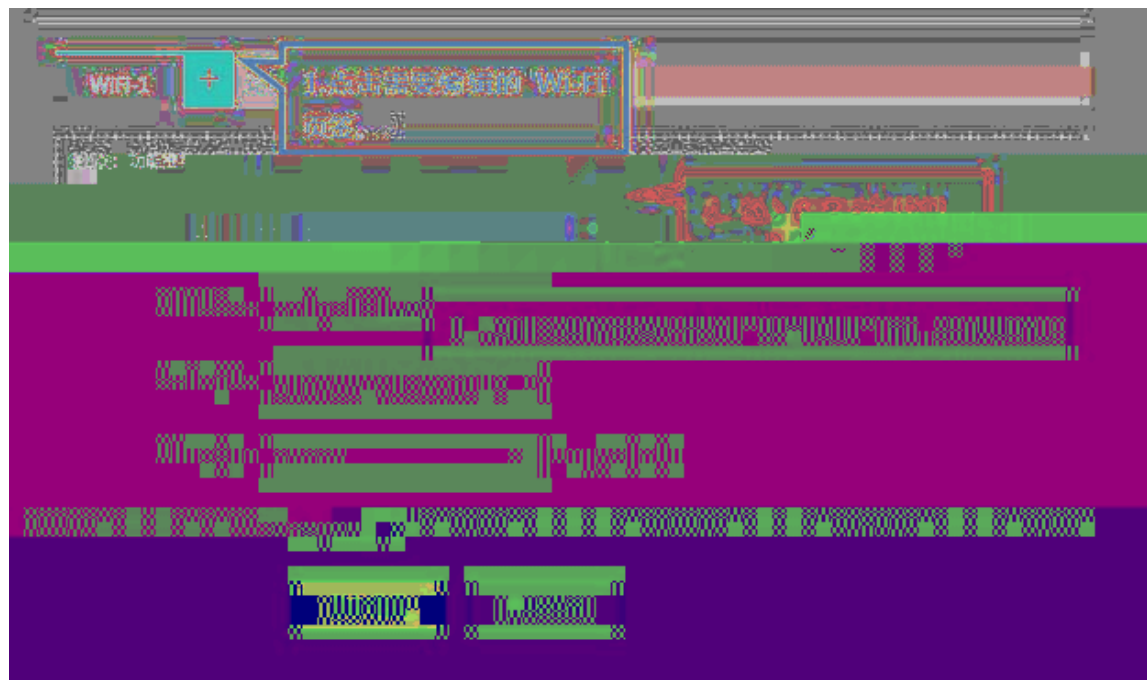

1.3.3.2 AP


1.3.3.2.1

Wi-Fi


2G

5G

2.4G

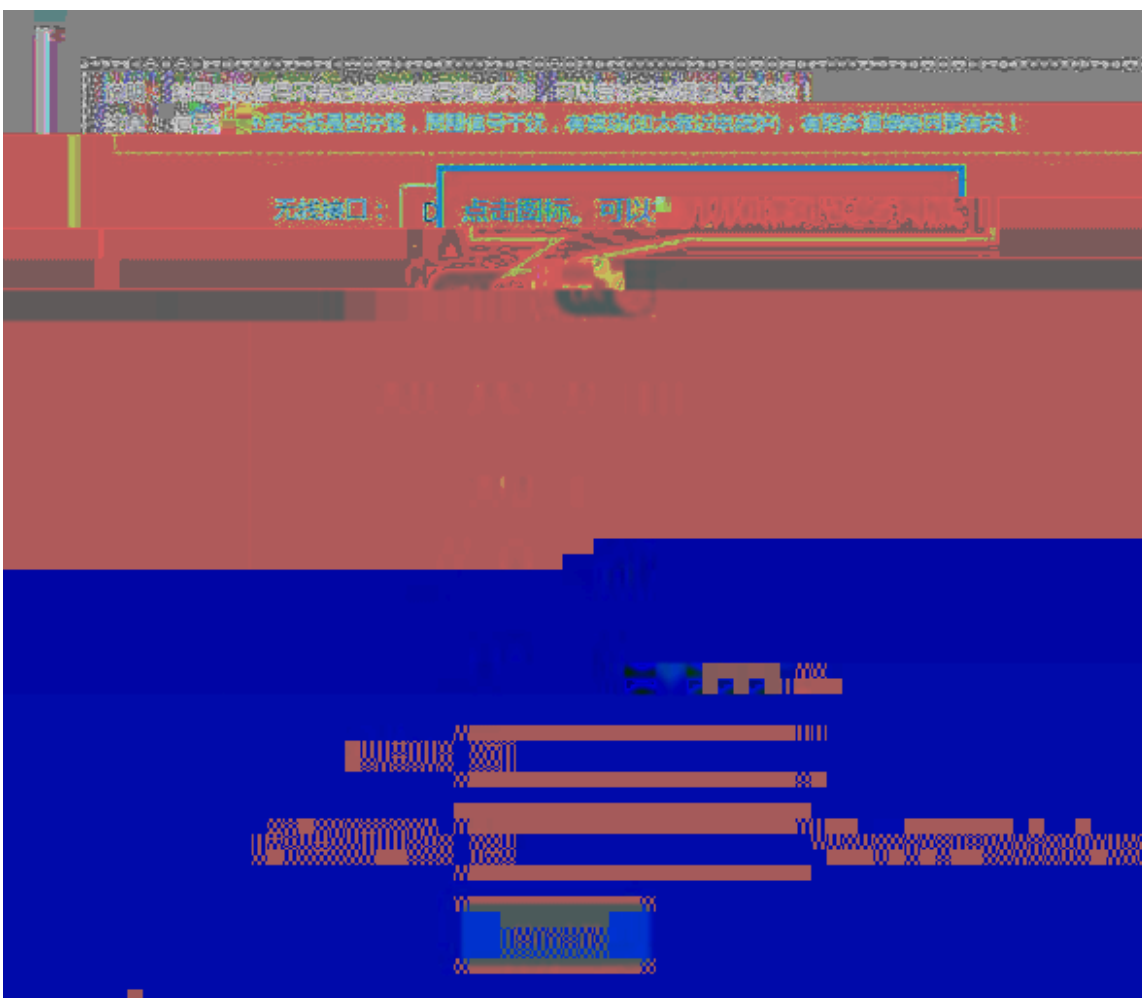

5G

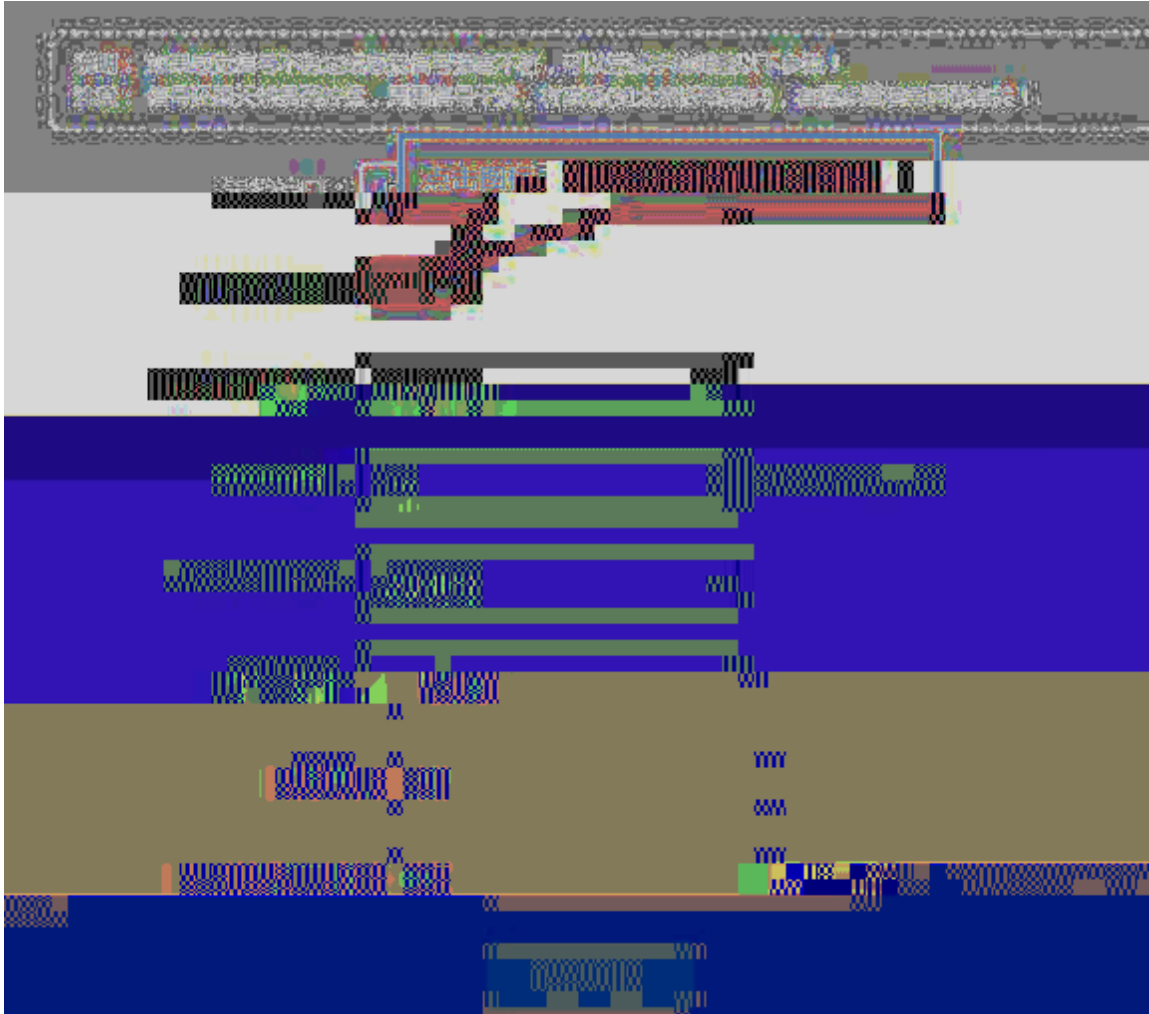

dot11radio 1/0 , dot11radio 2/0,
dot11radio 1/0 , dot11radio 2/0 dot11radio 3/0

2.4G 5G


dot11radio 1/0 2.4G

dot11radio 1/0 interface dot11radio 1/0 shutdown | no shutdown

30 80 100



MAC

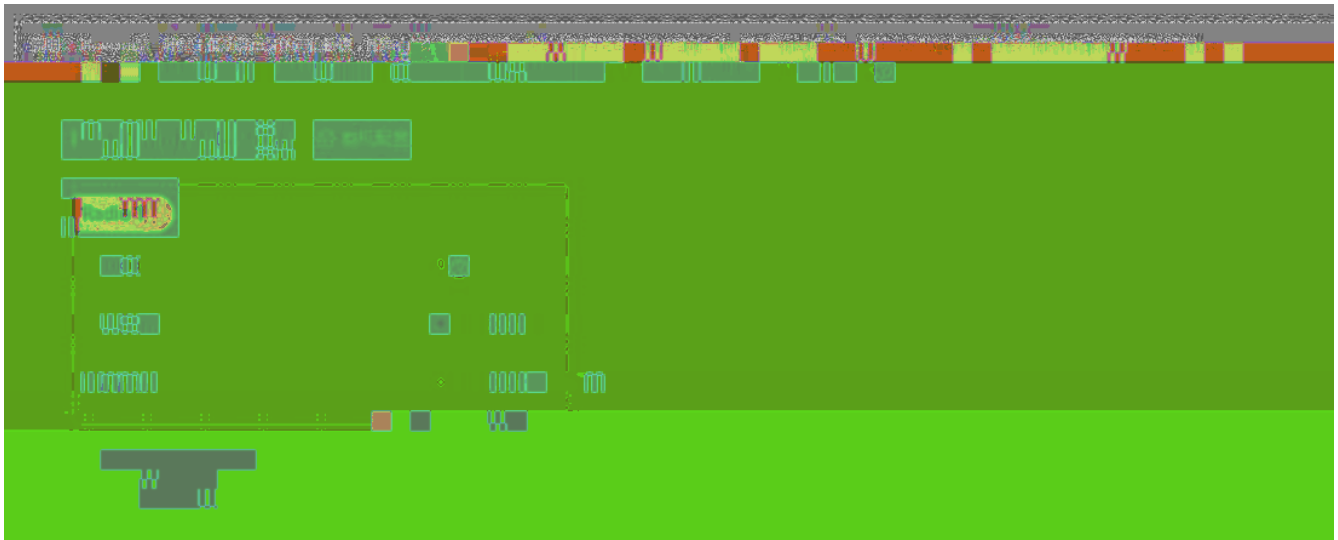

1.3.3.2.4




1.3.3.3

1.3.3.3.1

ap

AP

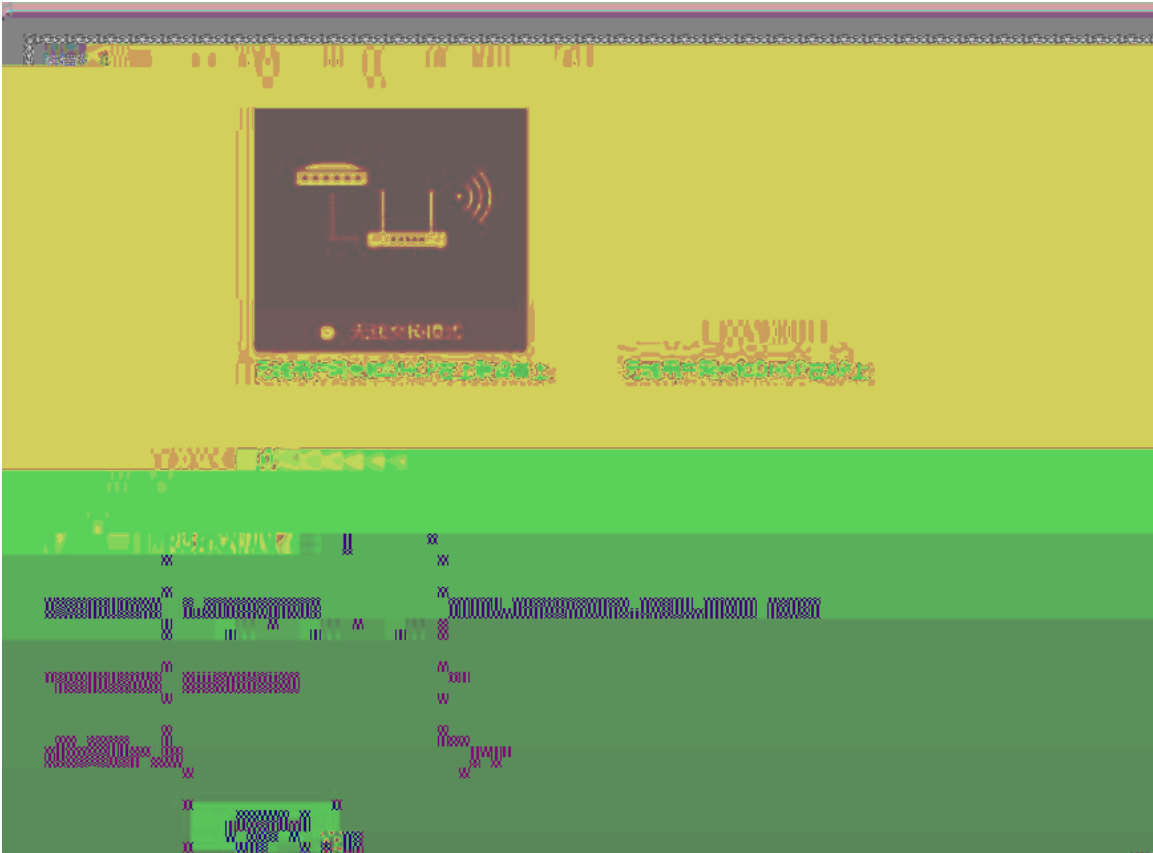

AP

VLAN: vlan
 (vlan IP) DHCP(vlan dhcp)

AP

WAN

 (vlan IP) DHCP(vlan dhcp) PPPOE

-IP

WAN IP

-

WAN IP

PPPOE -


PPPOE

PPPOE -

PPPOE

DHCP-

1.3.3.3.2

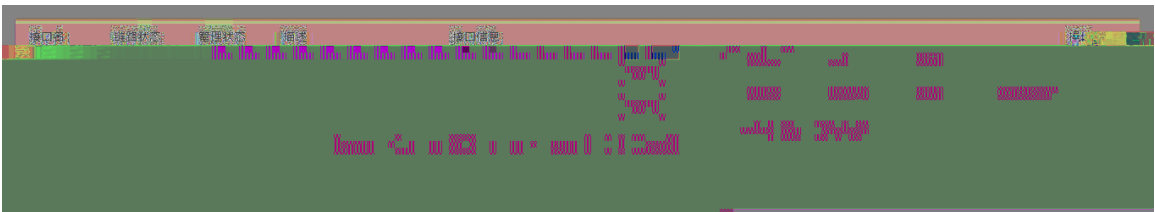

IP

IPv4

IPv4

IPv6

IPv6


AP

Lan


VLAN ID

VLAN


1.3.3.3.3 VLAN

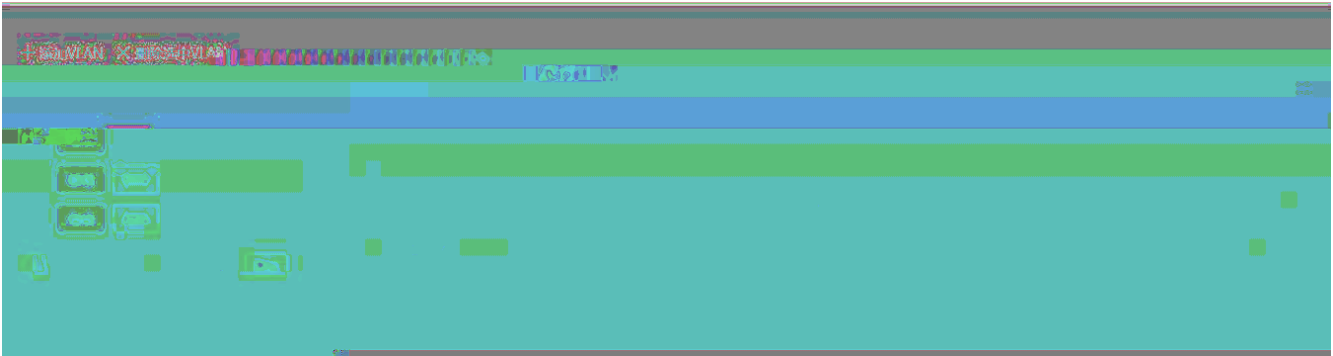


VLAN

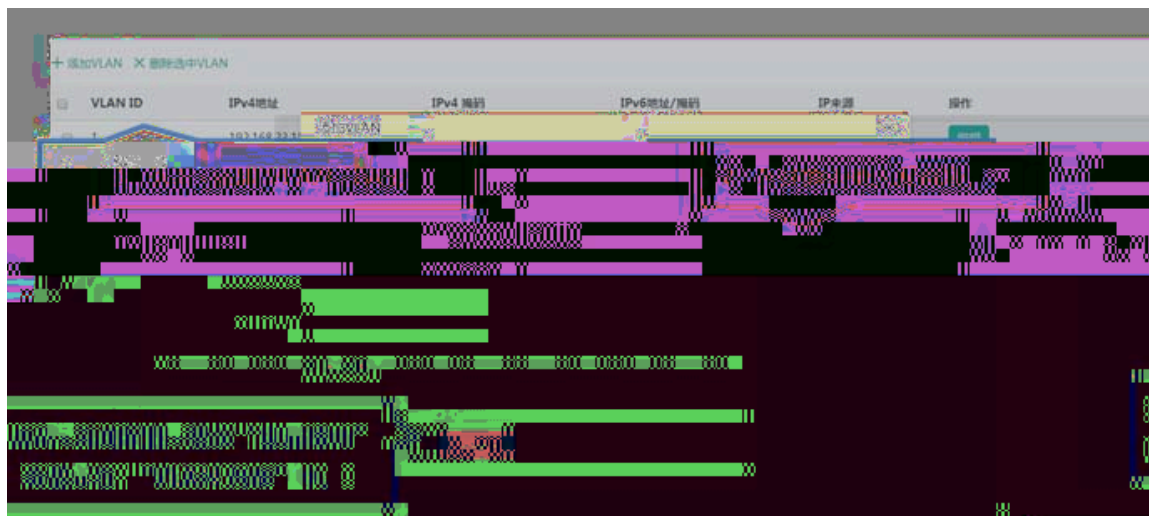


VLAN

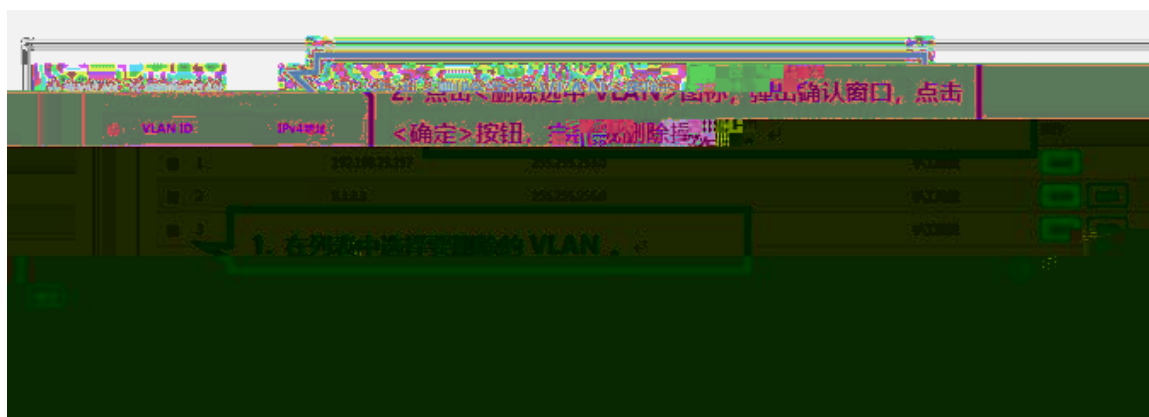


VLAN

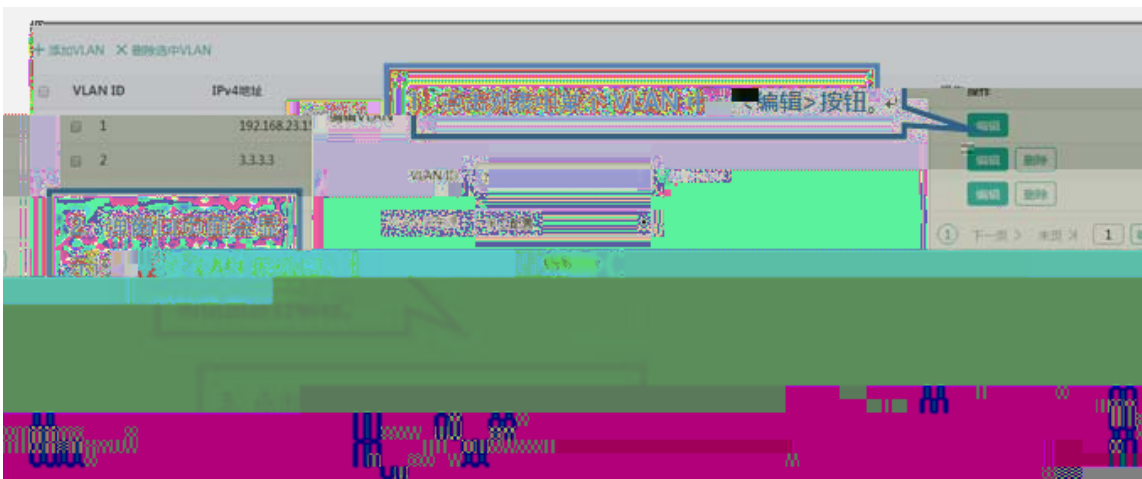


VLAN

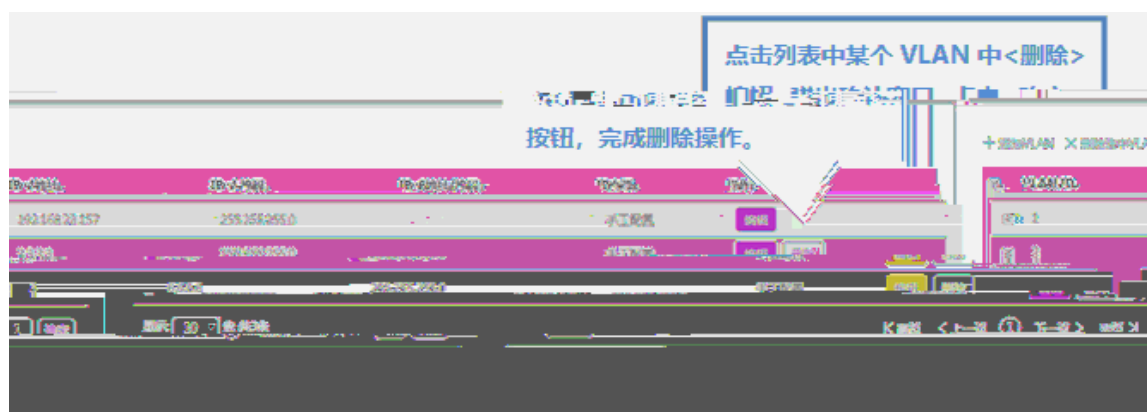


1.3.3.3.4

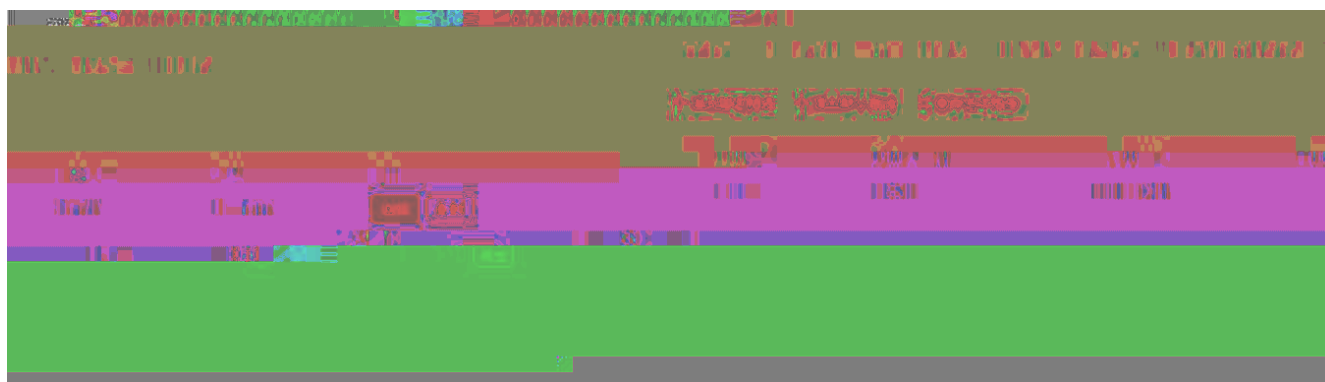


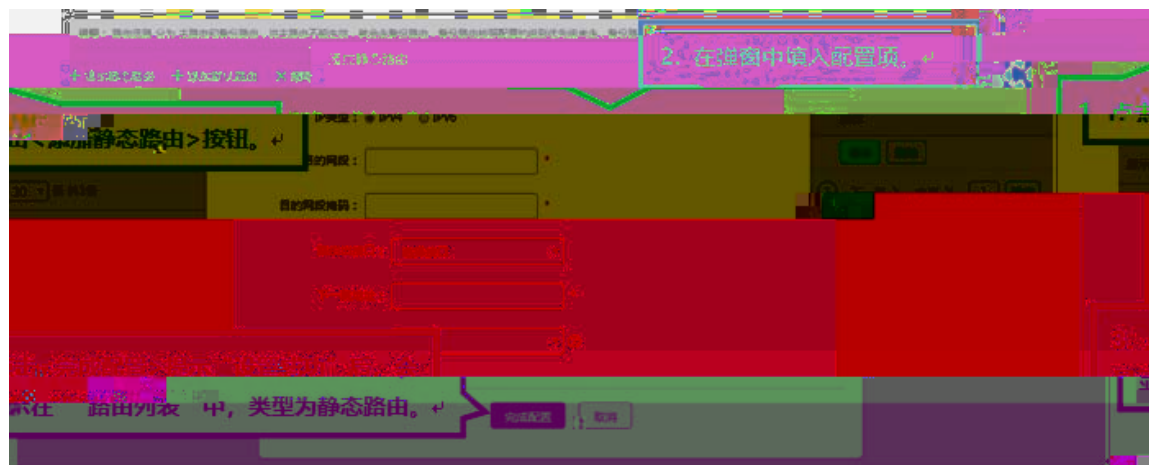

1


2

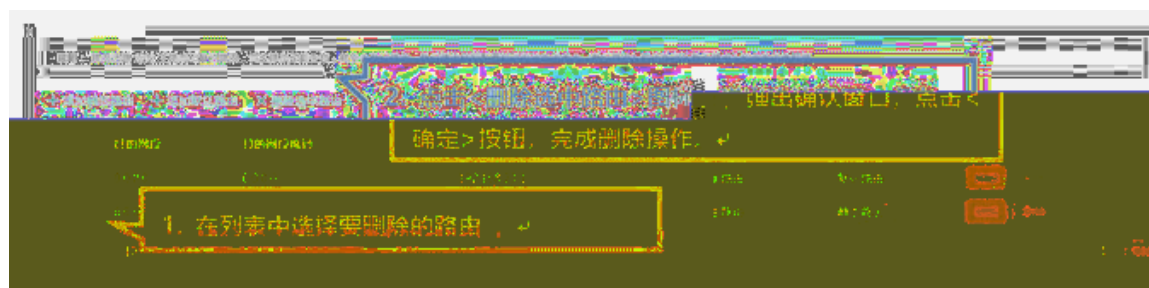

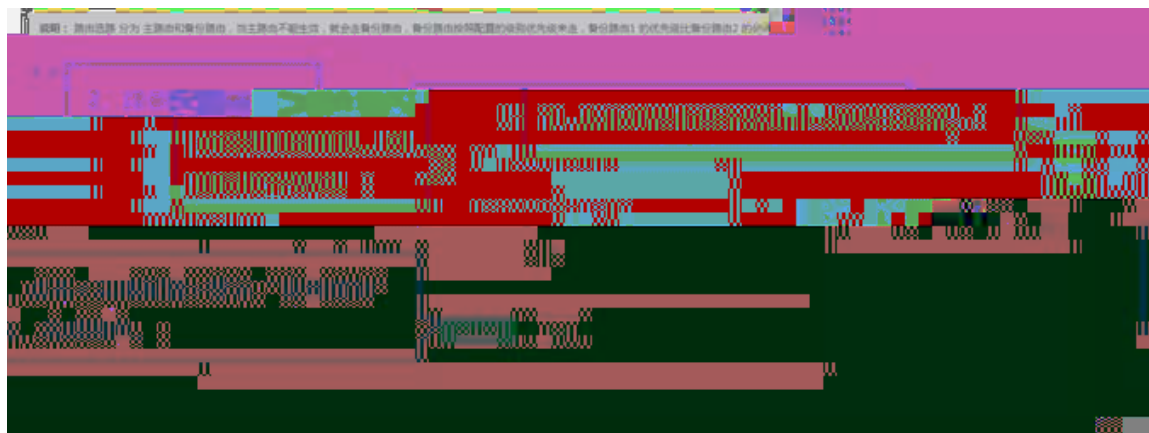

1.3.3.3.5 DHCP

DHCP

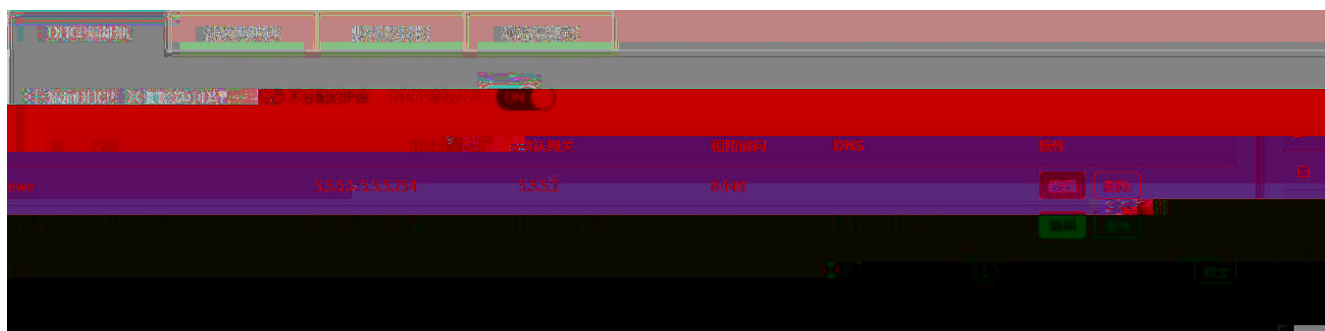

DHCP



DHCP

Dhcp

DHCP

IPv4 IPv6.

IP

DNS

DNS

DNS

DNS

OPTION138

AP IP AP AC AC loopback


OPTION43

AP IP AP AC AC loopback


DHCP




IP

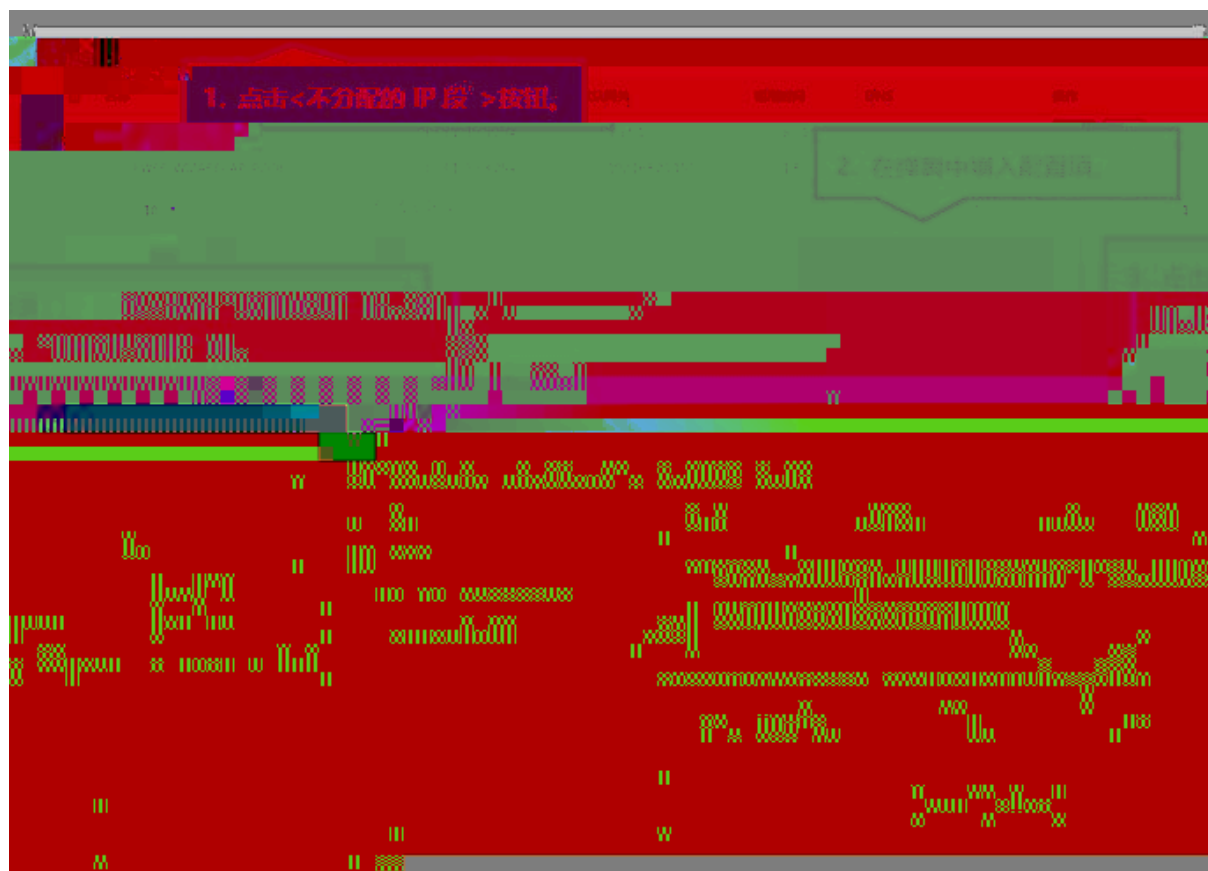

DHCP

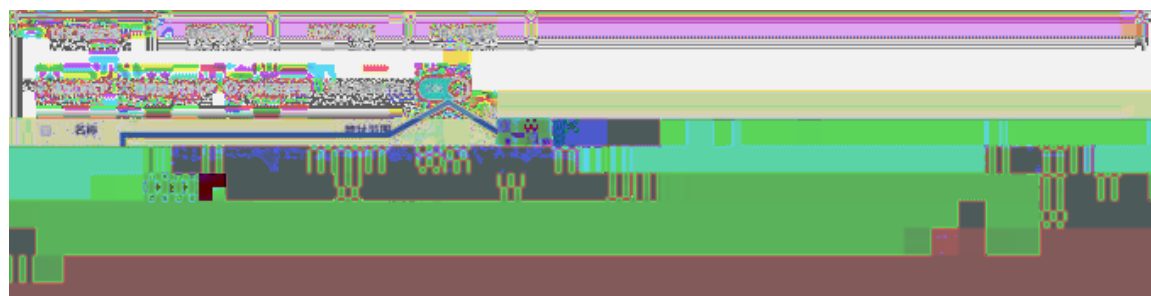


DHCP

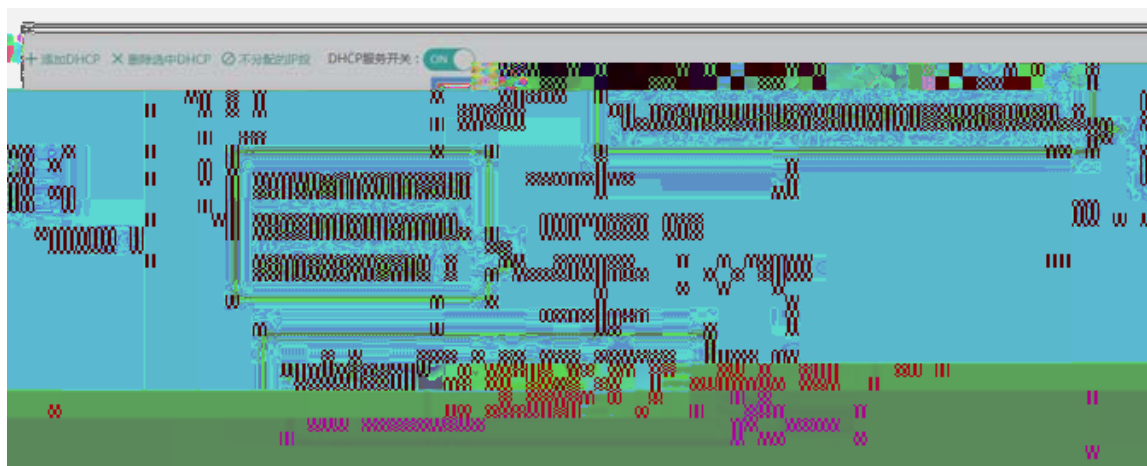


DHCP

DHCP

DHCP

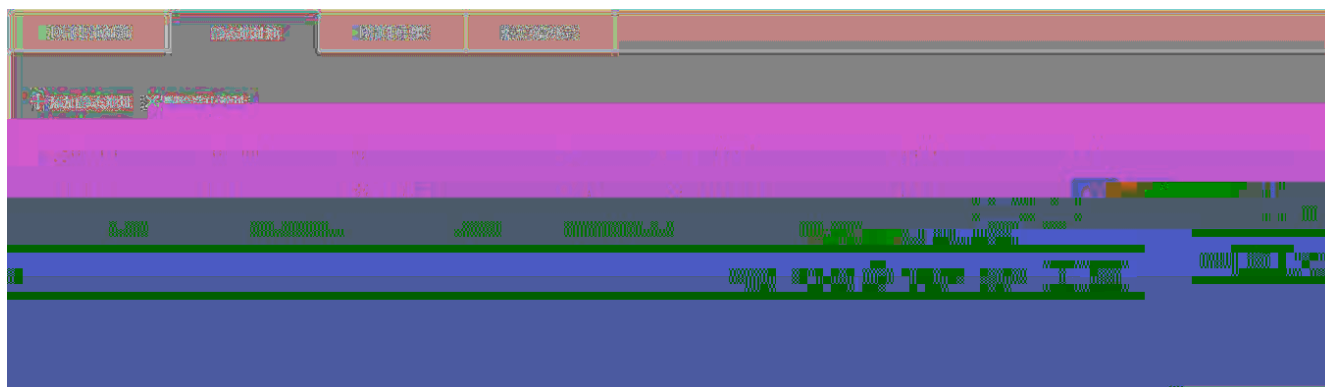

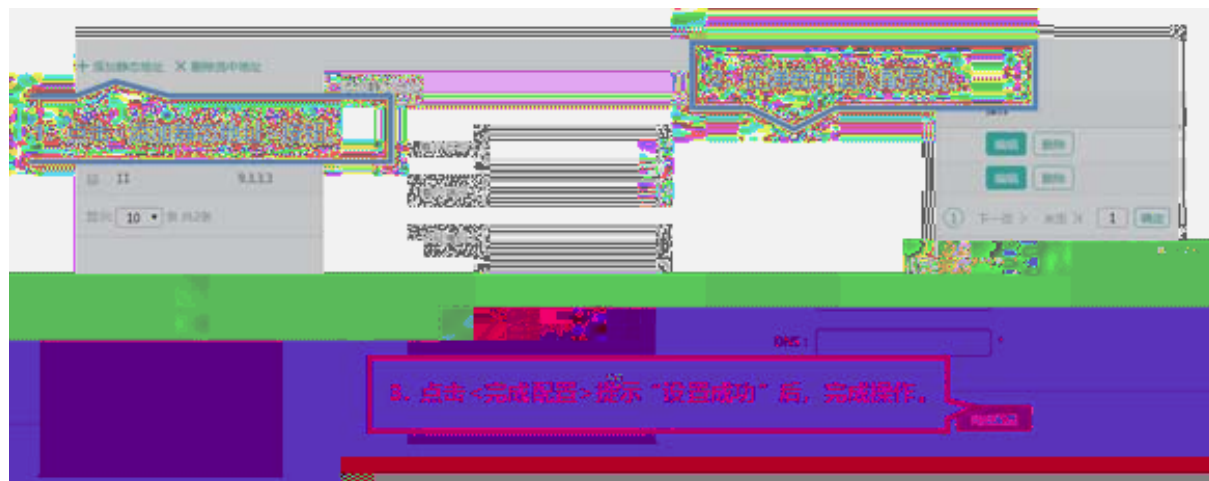

IP

IP


IP

MAC


MAC

DNS

DNS

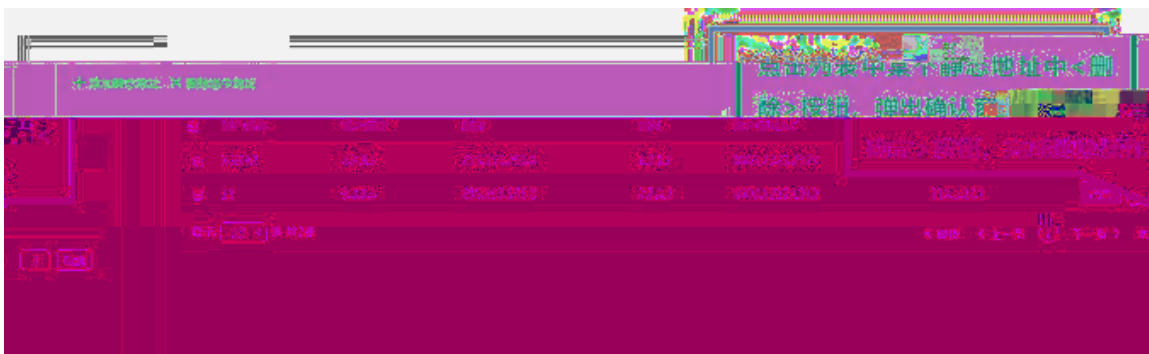


DHCP

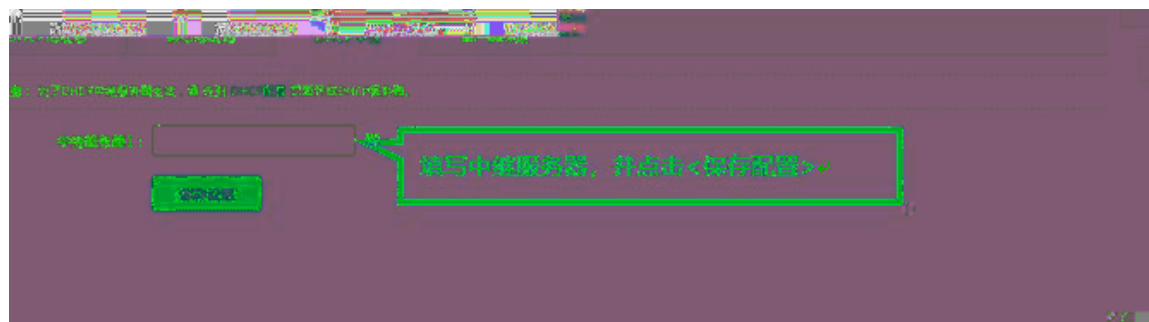

MAC

IP




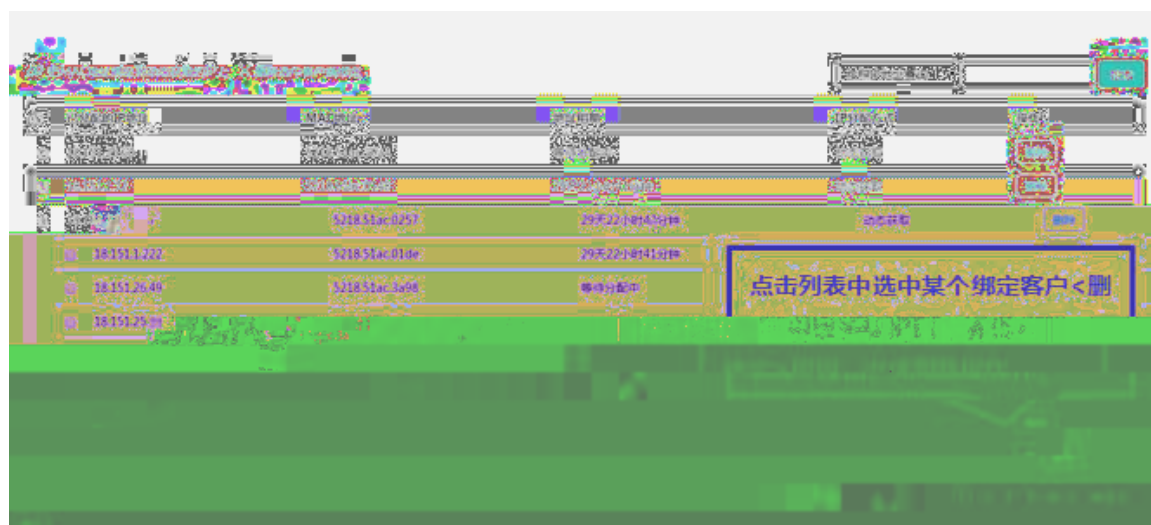



IP



1.3.3.3.6


AP

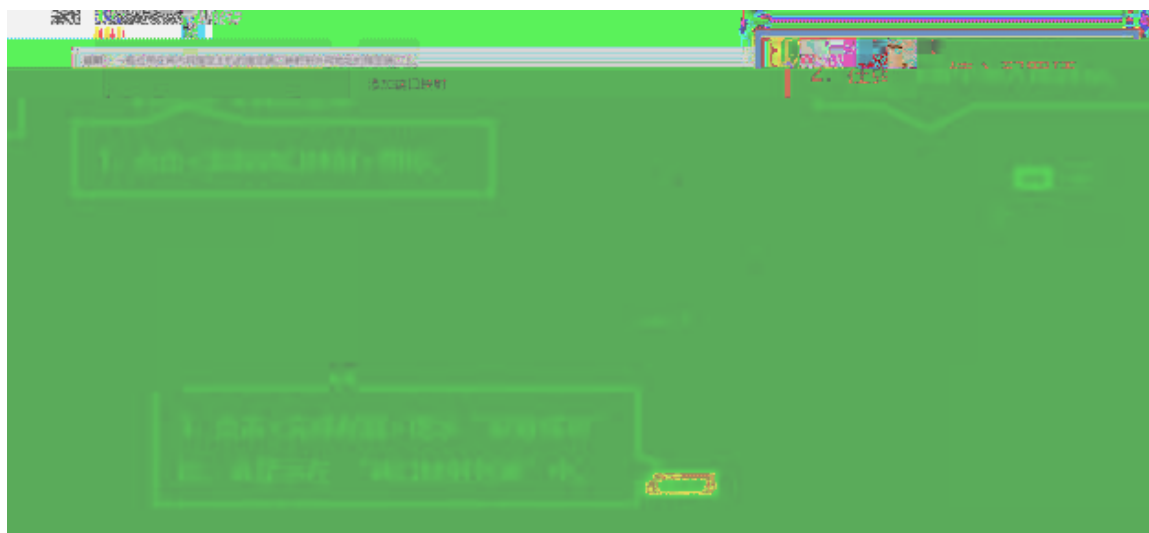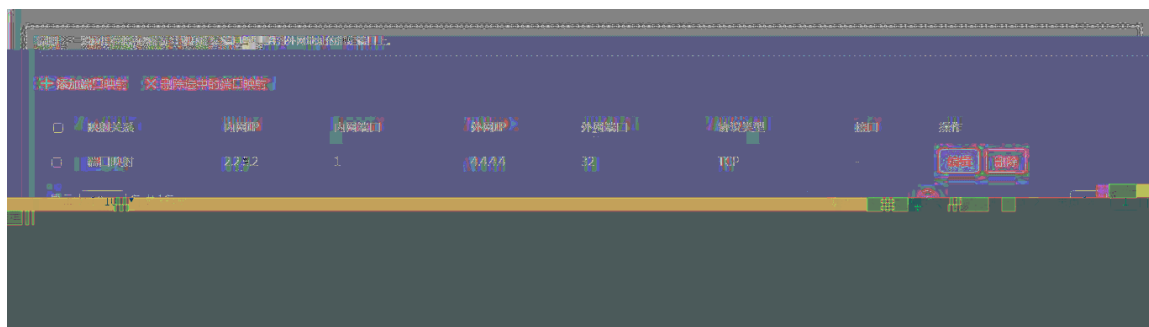


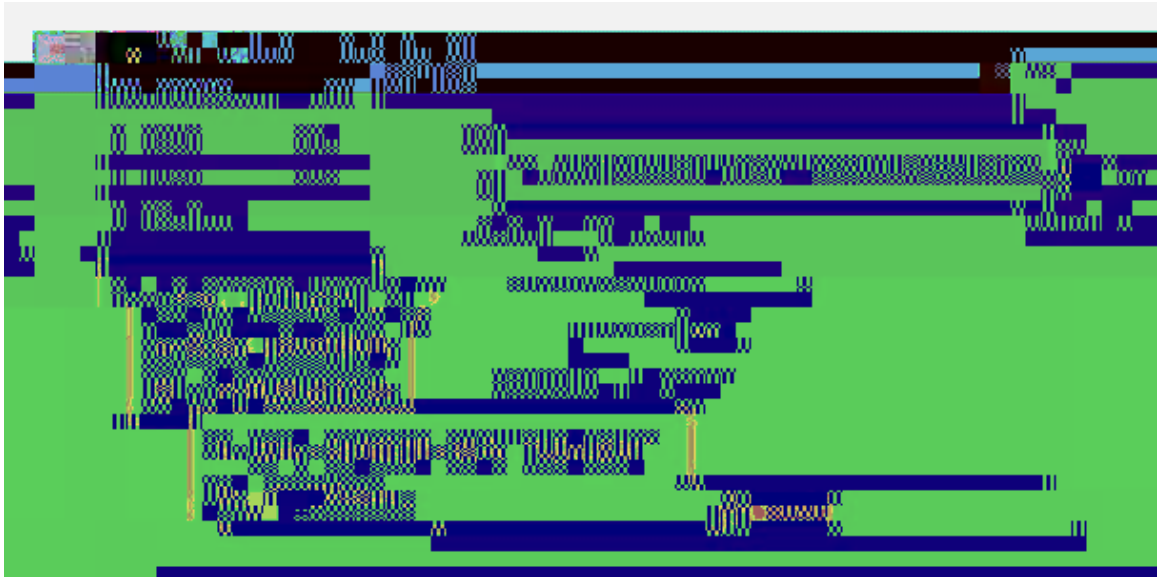

1.3.3.3.7 VPN


1 vpn ip VPN

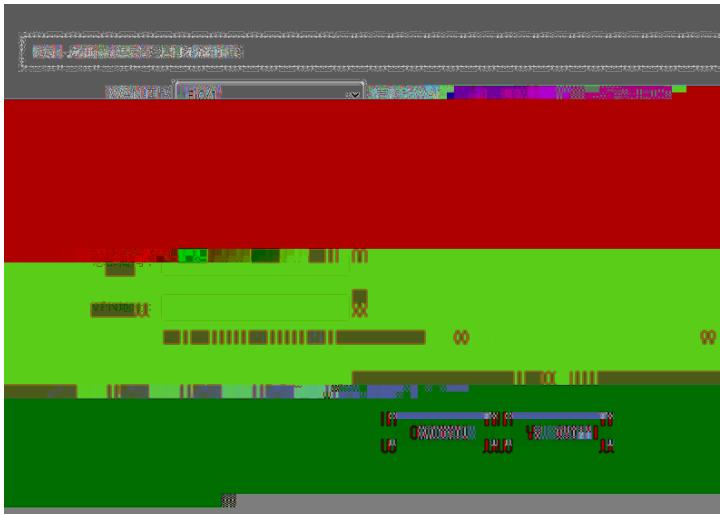


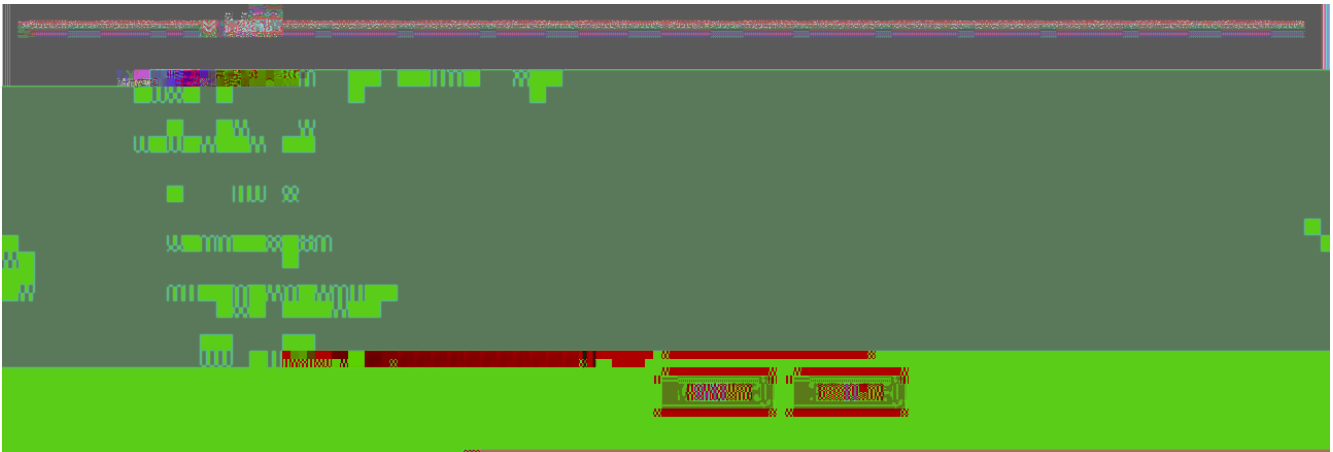

1.3.3.4

1.3.3.4.1 AP

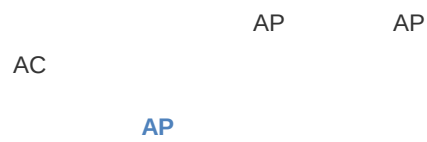


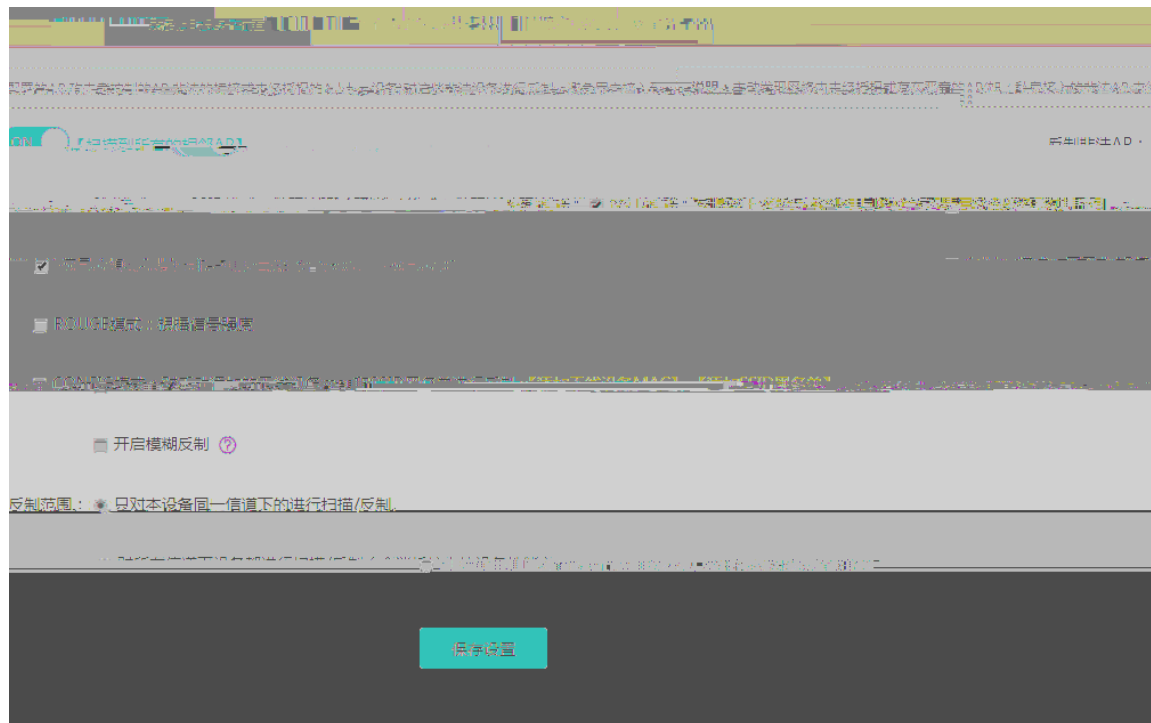


MAC

MAC

MAC.

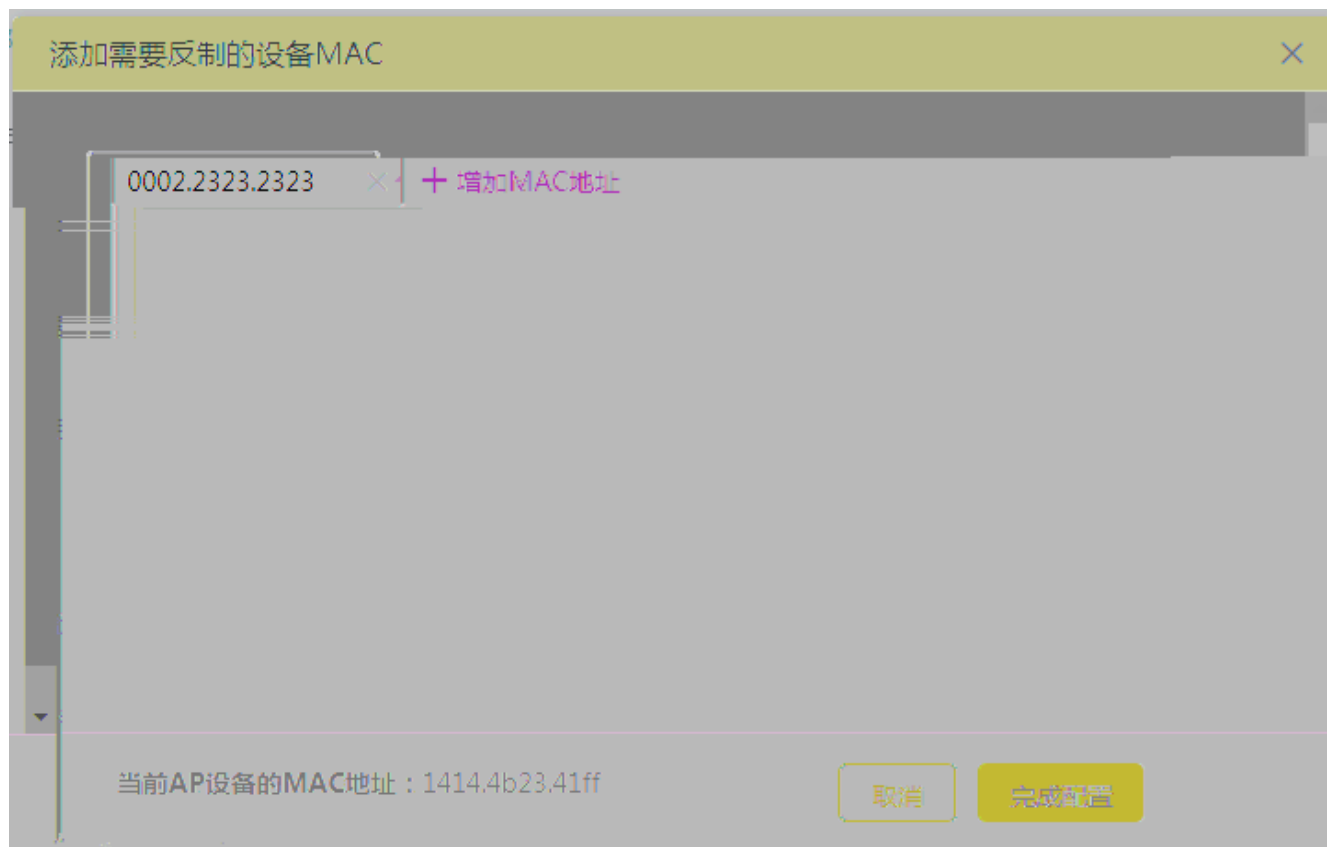

SSID

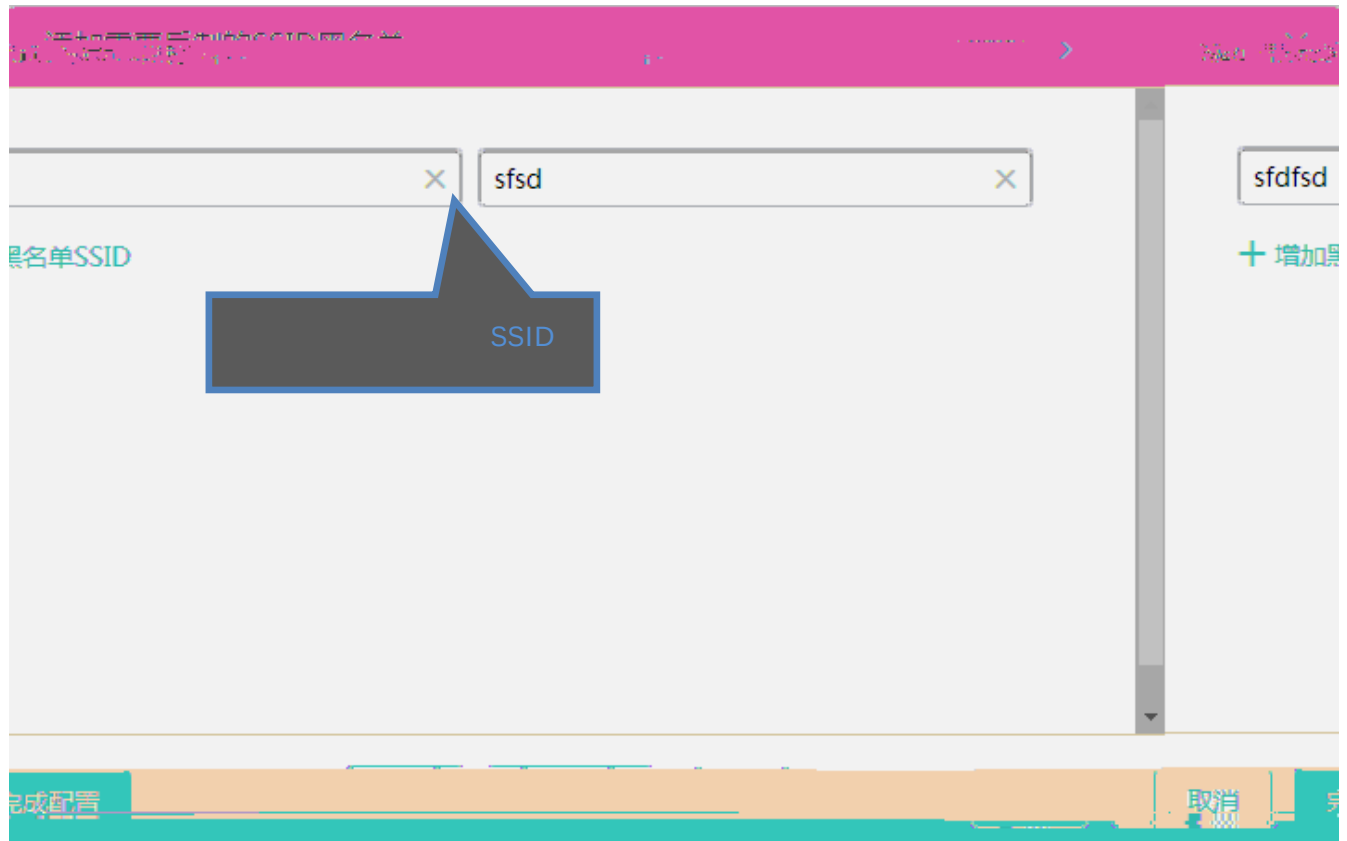


AC
MAC

AP

AP

AP

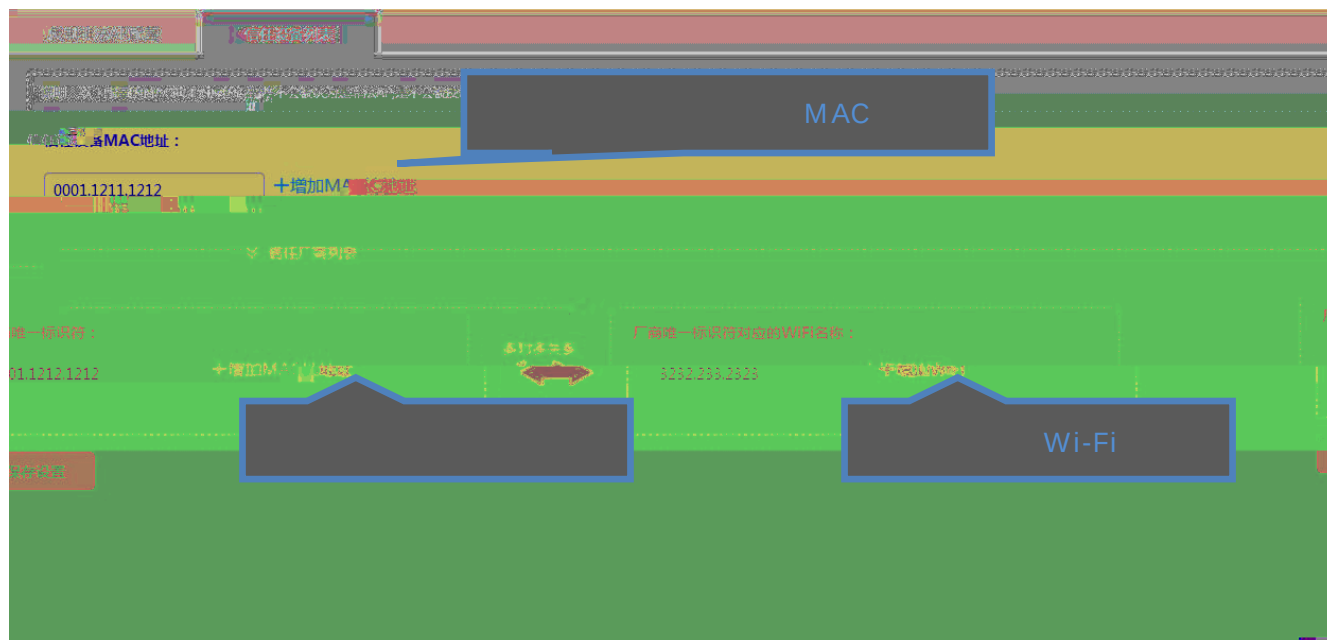


Wi-Fi

Wi-Fi

Wi-Fi,



Wi-fl


Wi-Fi

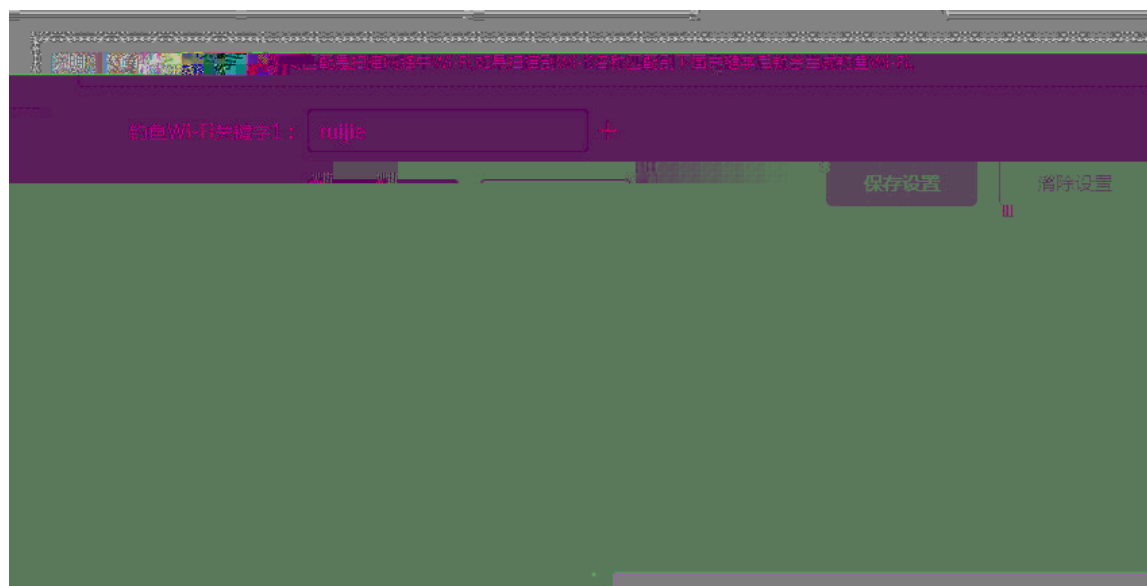



1.3.3.4.2


Wi-Fi	1024
Wi-Fi	1024

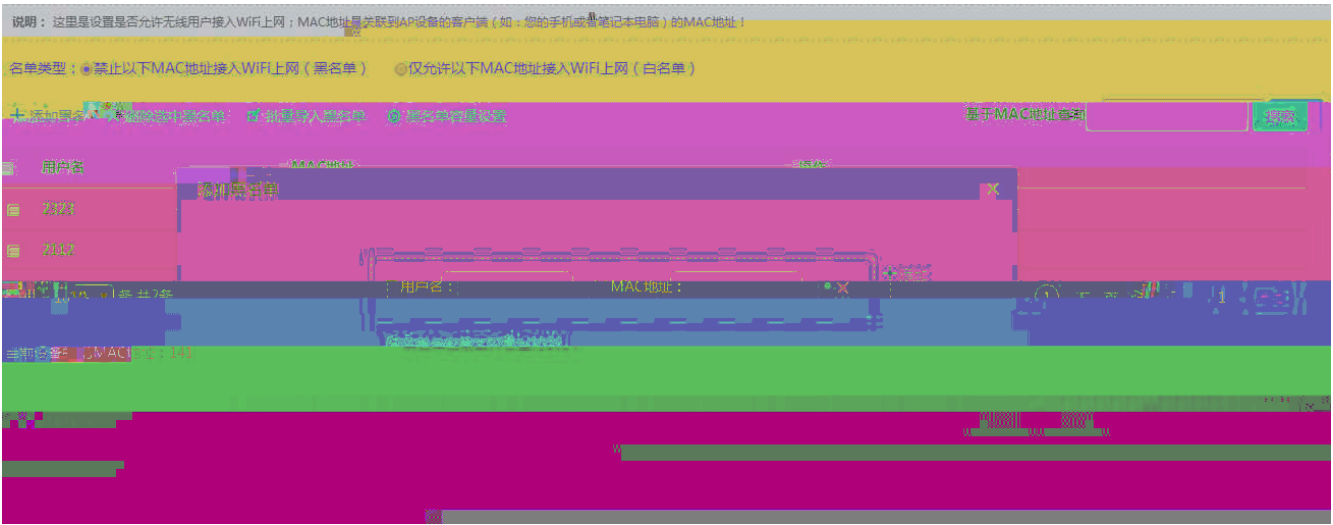
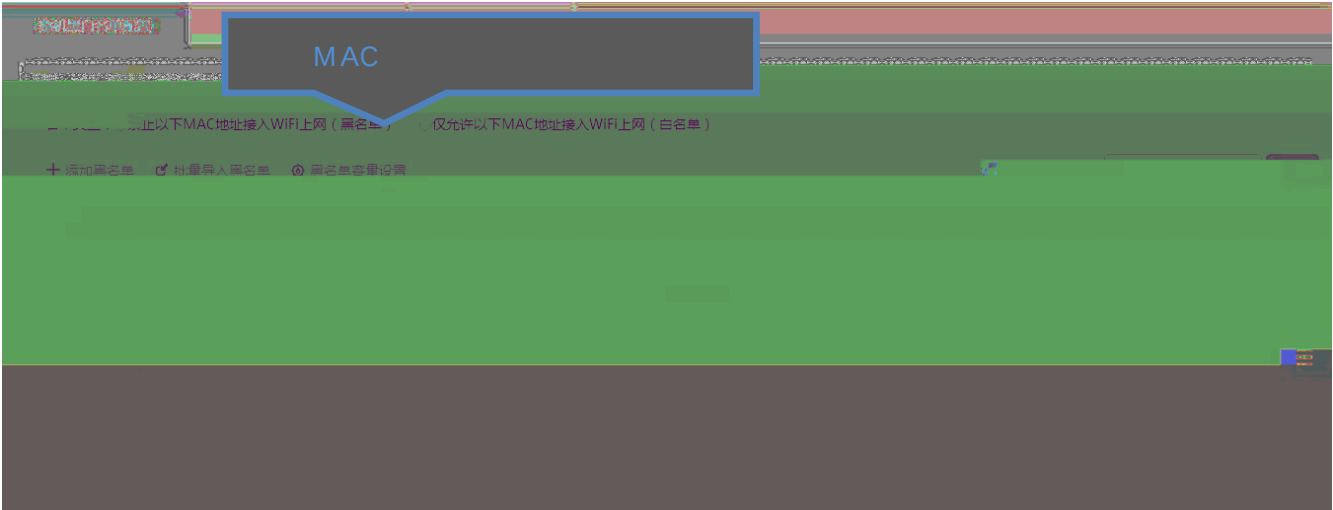


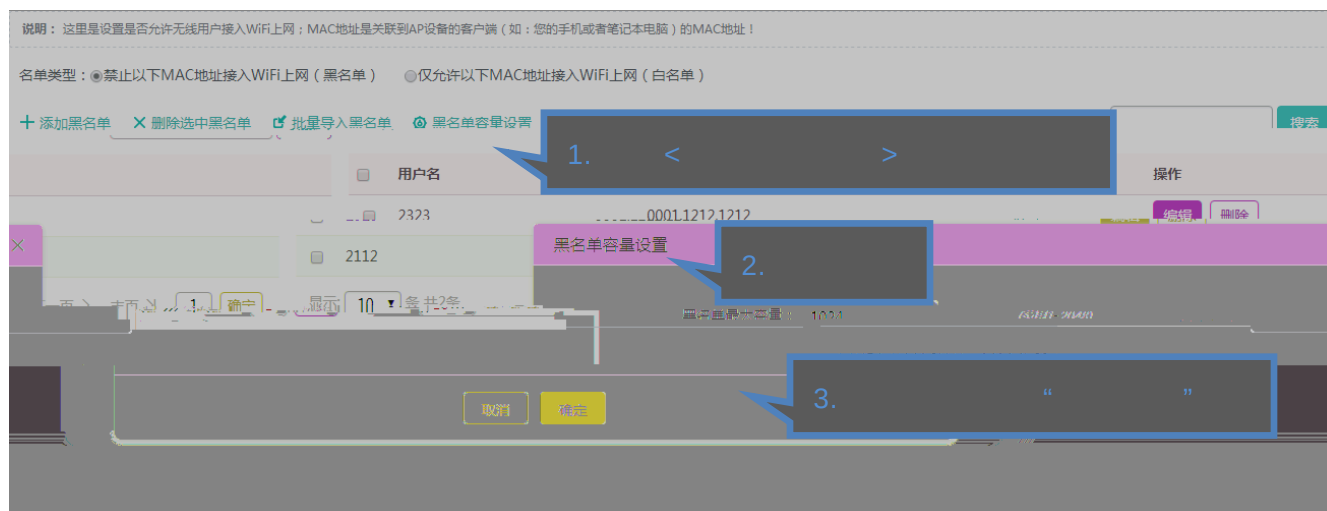


SSID

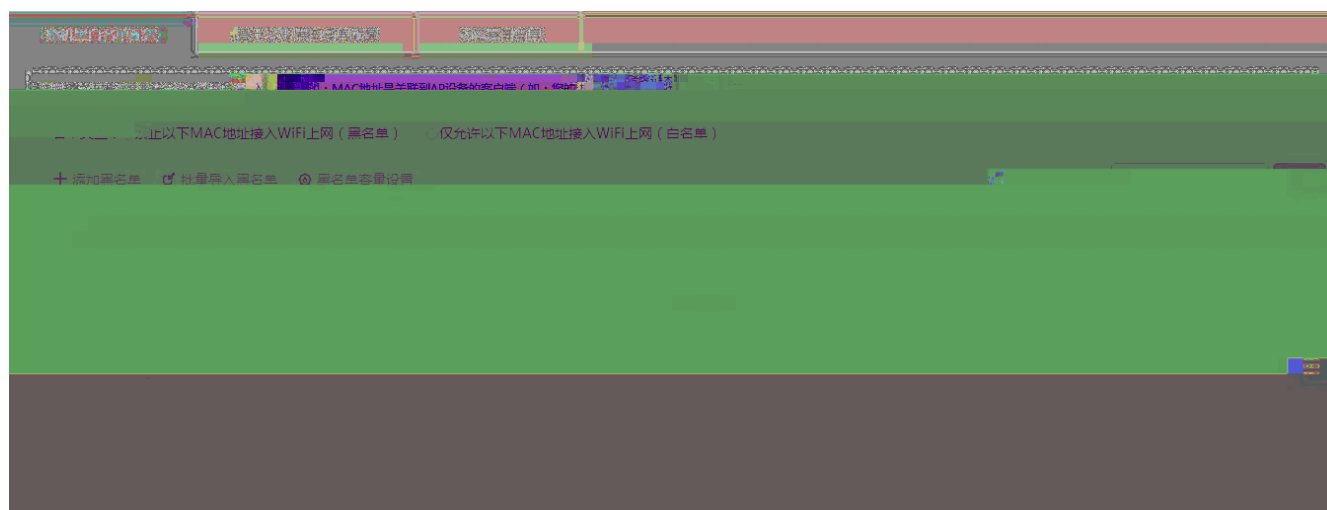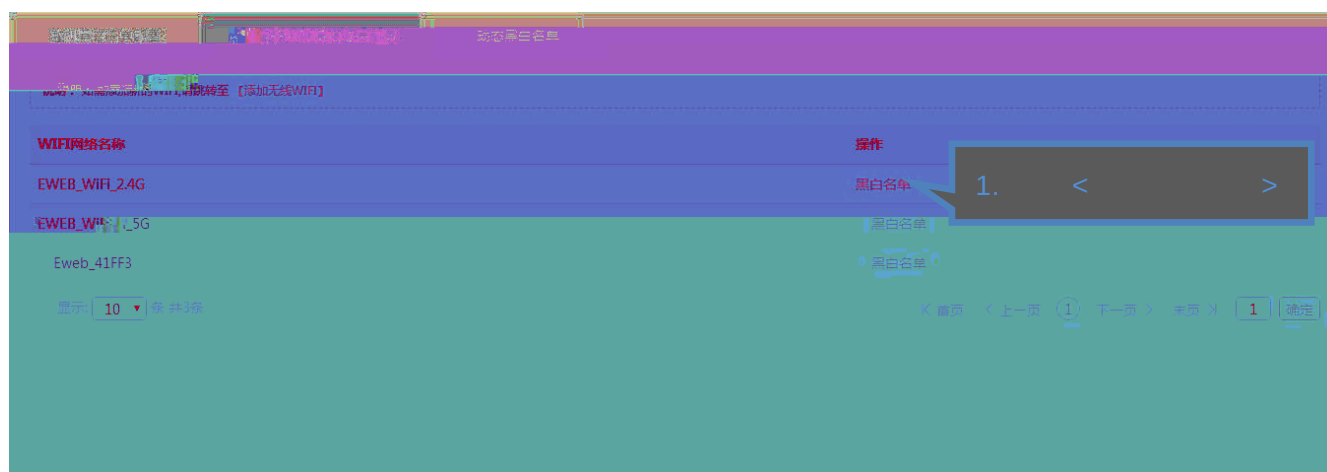


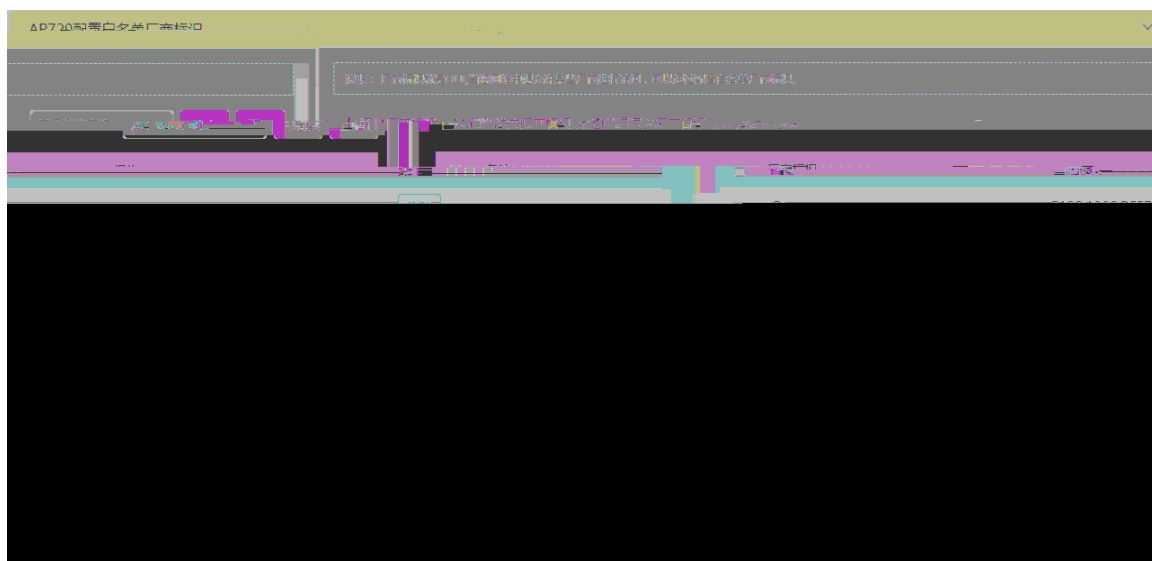

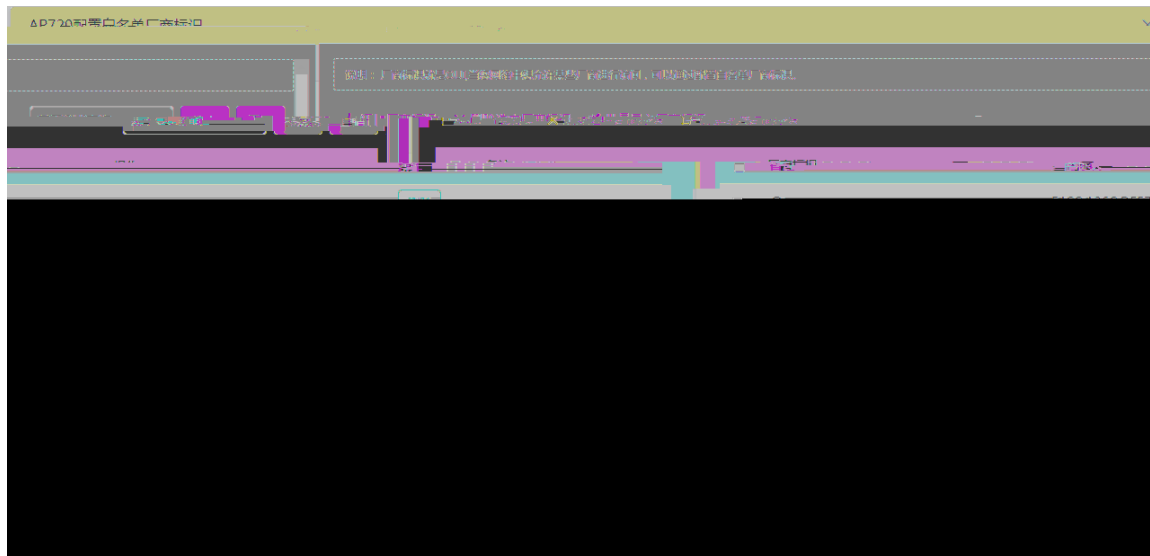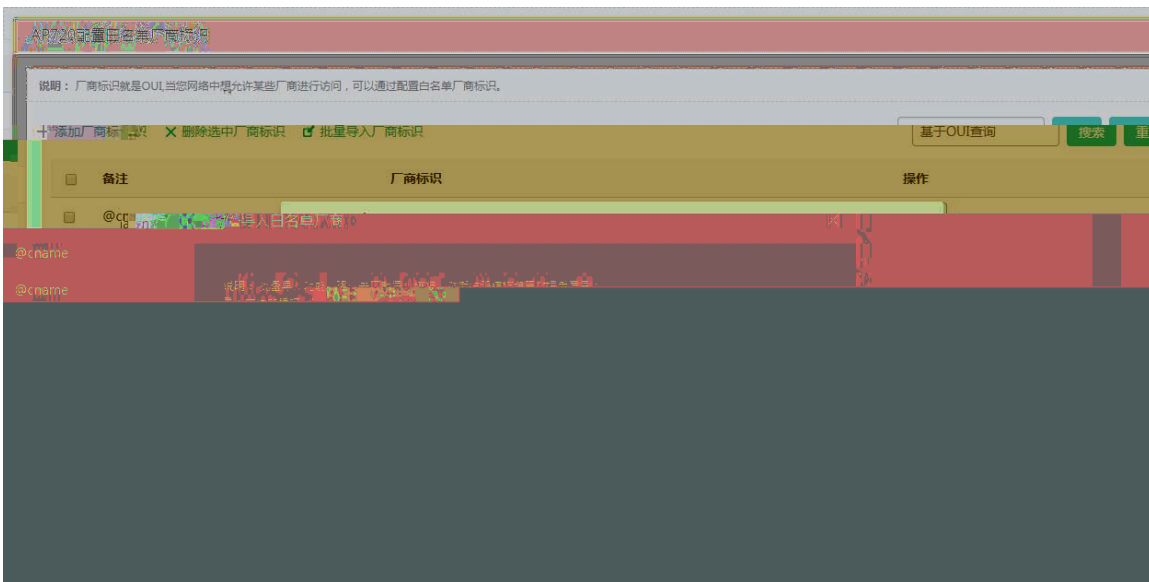



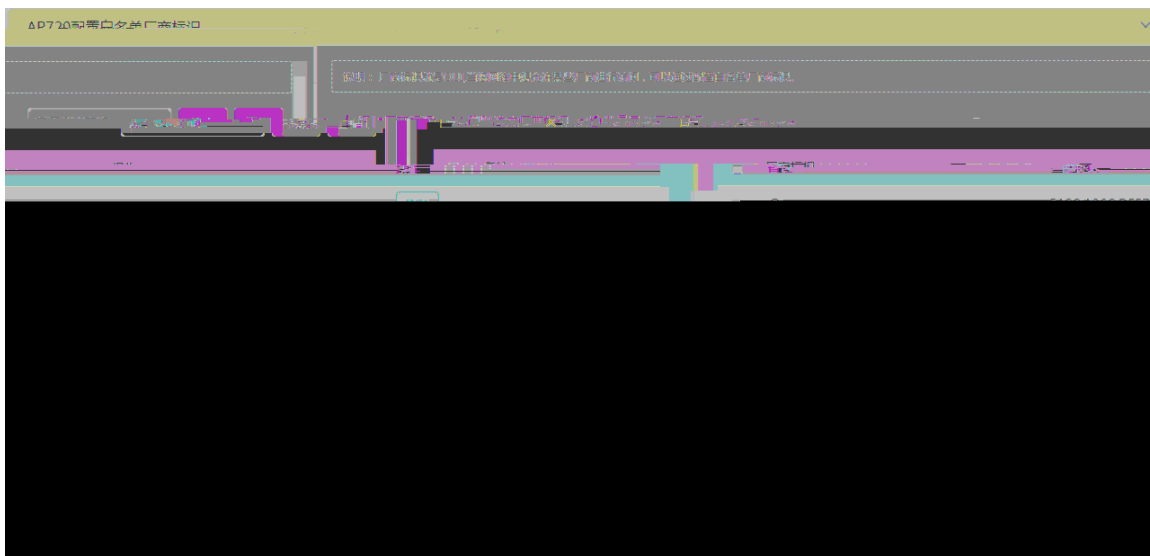


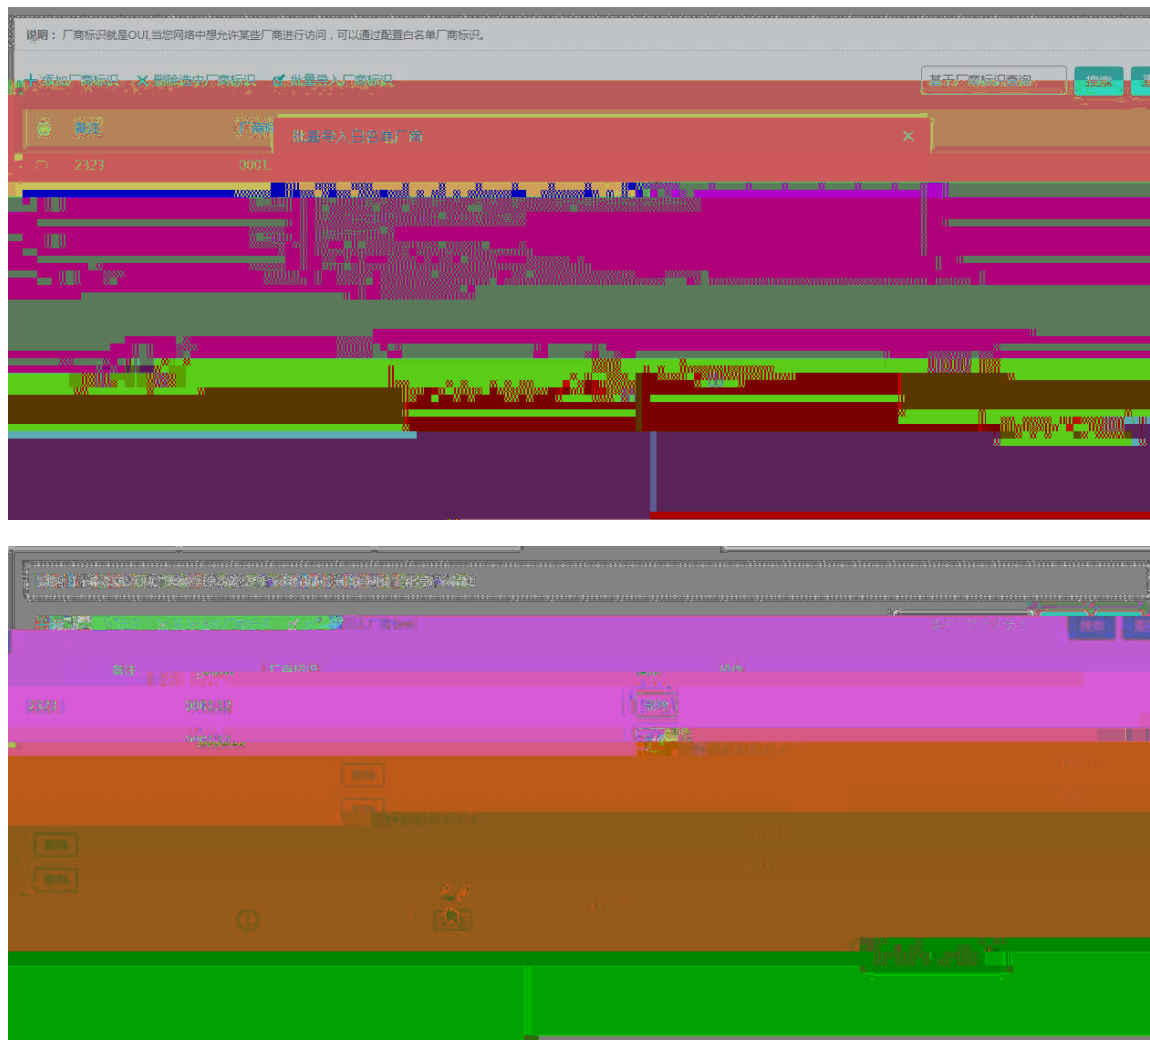

1.3.3.4.3

()

MAC

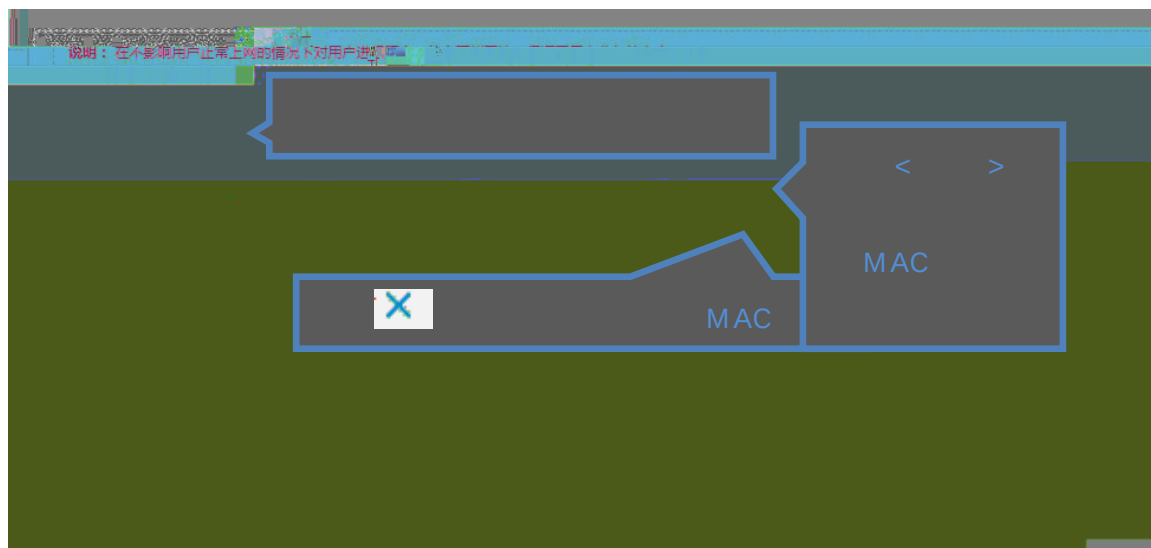



1.3.3.4.4

CPU




1.3.3.4.5 ARP

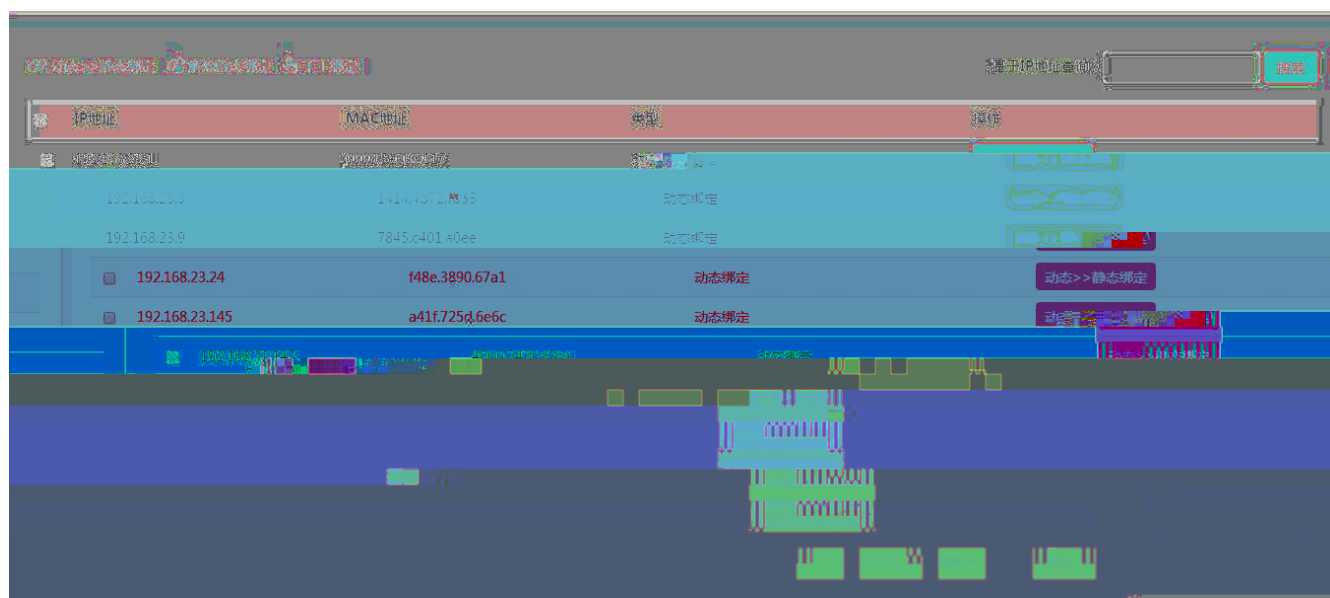

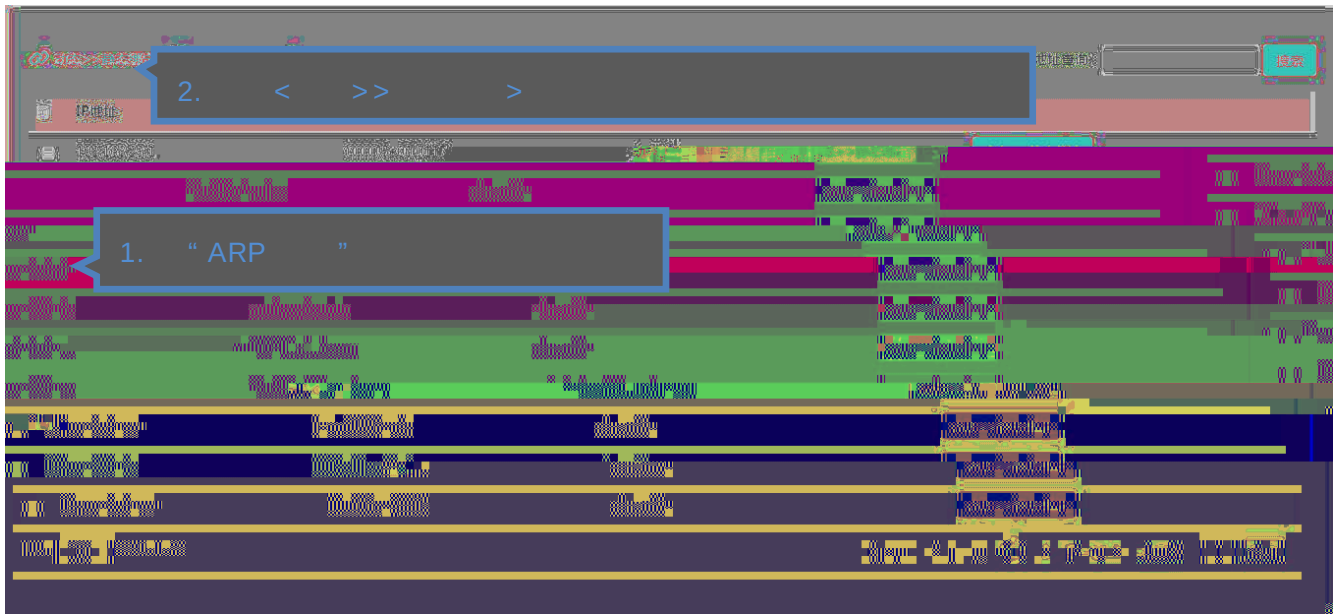





1.3.3.4.6 ACL

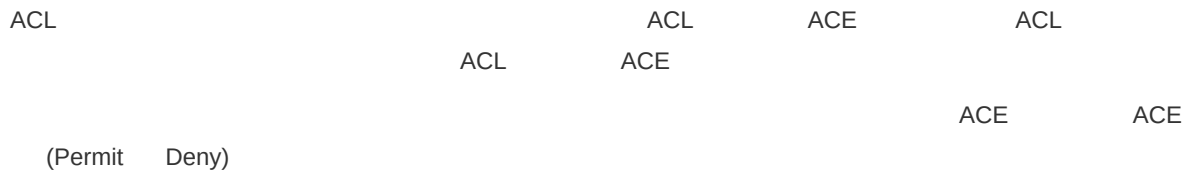

ACL

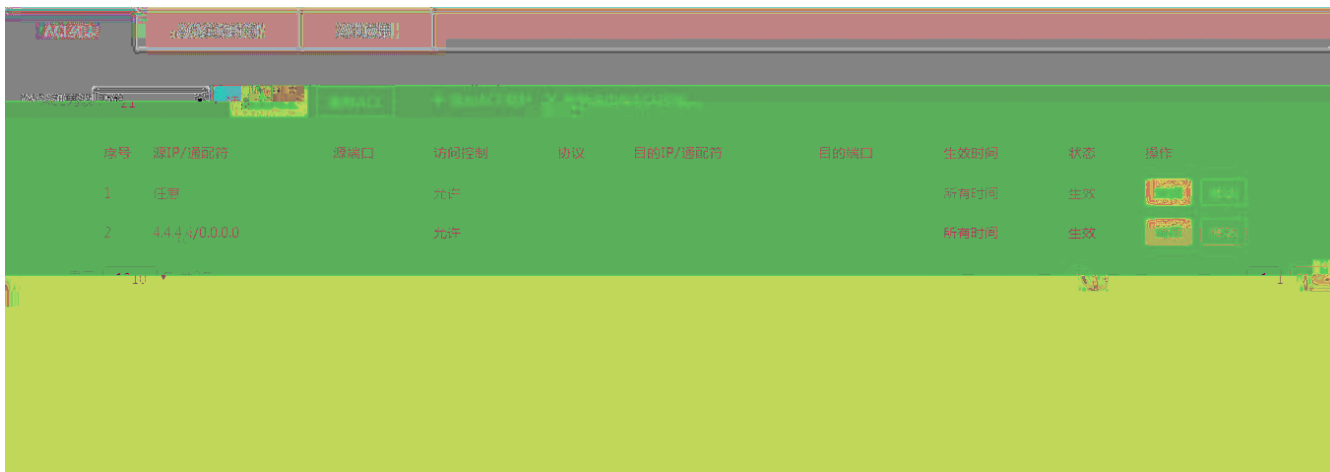


ACL

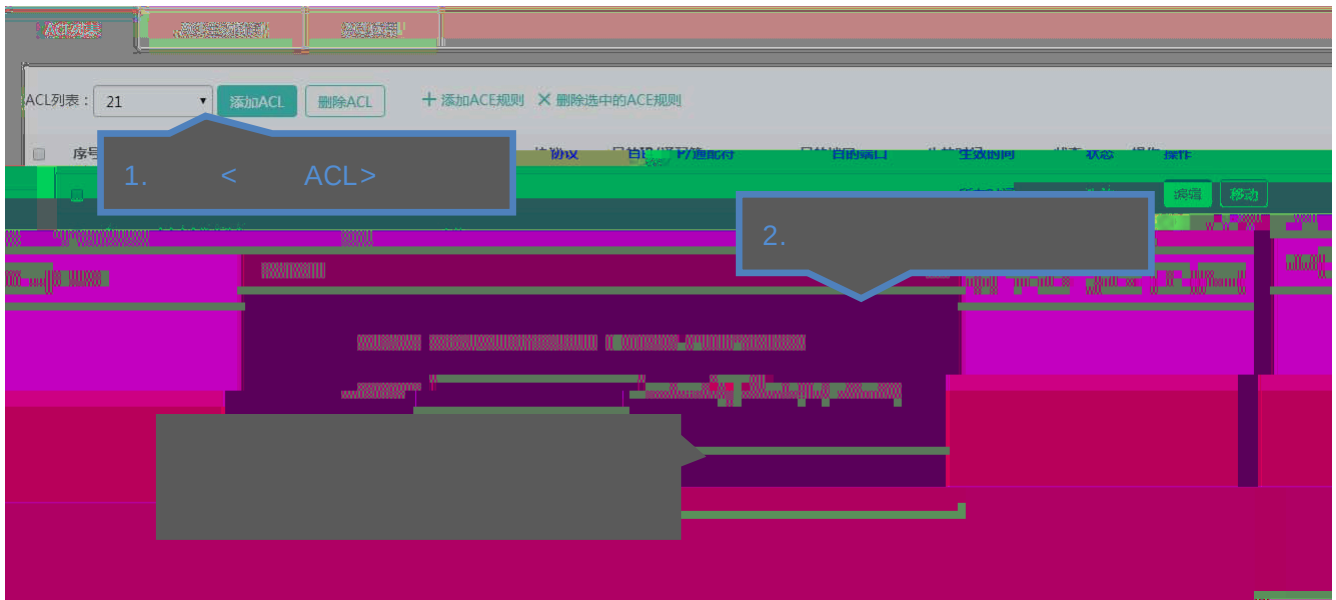



ACE

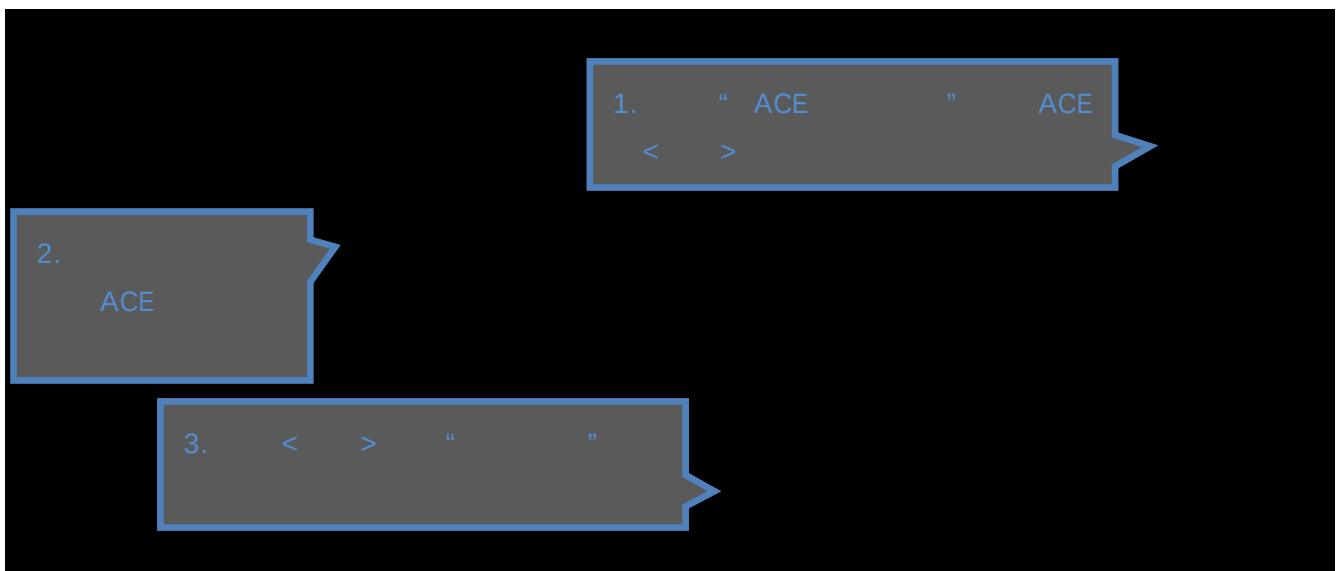


ACE



ACL

ACL

ACL

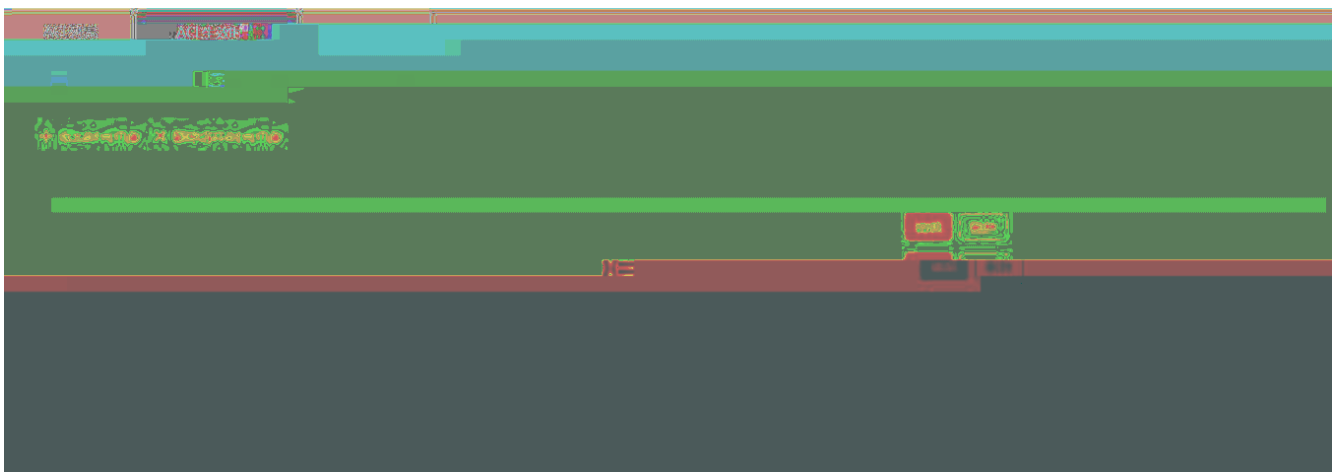

说明：ACL生效时间目前只支持周期性时间配置，不支持绝对时间配置。


+ 添加时间对象

✕ 删除选中时间对象

时间对象	时间周期	时间段	操作
☐ 1212	星期四	0:00-18:16	新增 删除



ACL

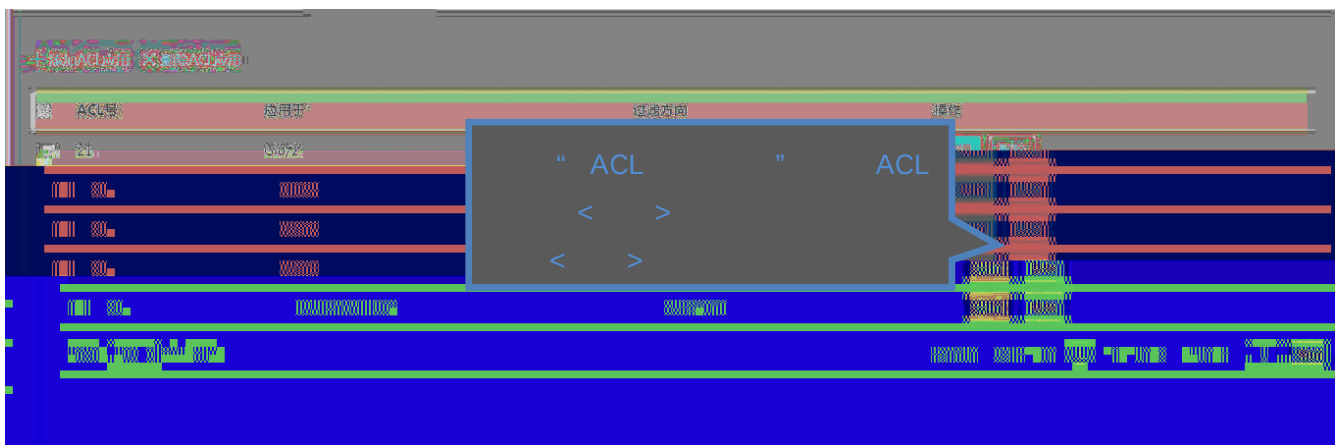


1.3.3.5

1.3.3.5.1 Web

Web

Web


Web

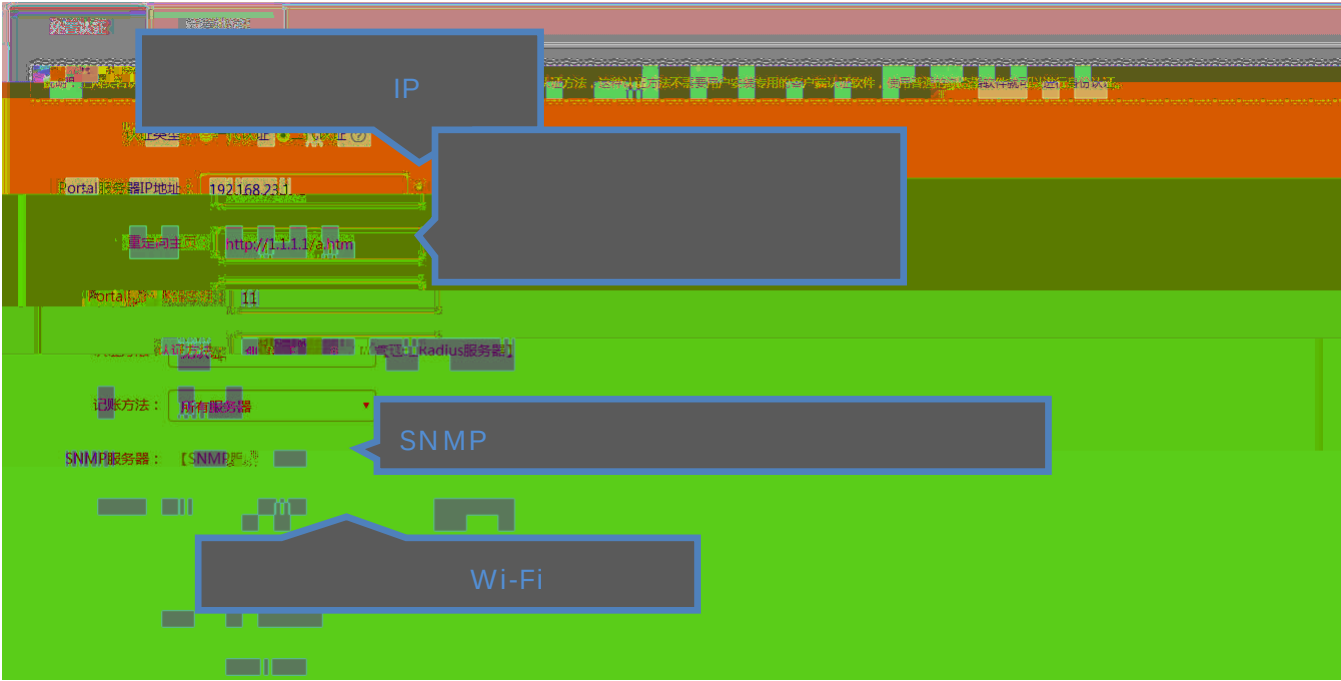

Portal IP
ip { ip-address } IP


URL portal
Portal

Web AAA
Web RADIUS
Web AAA
Web 0

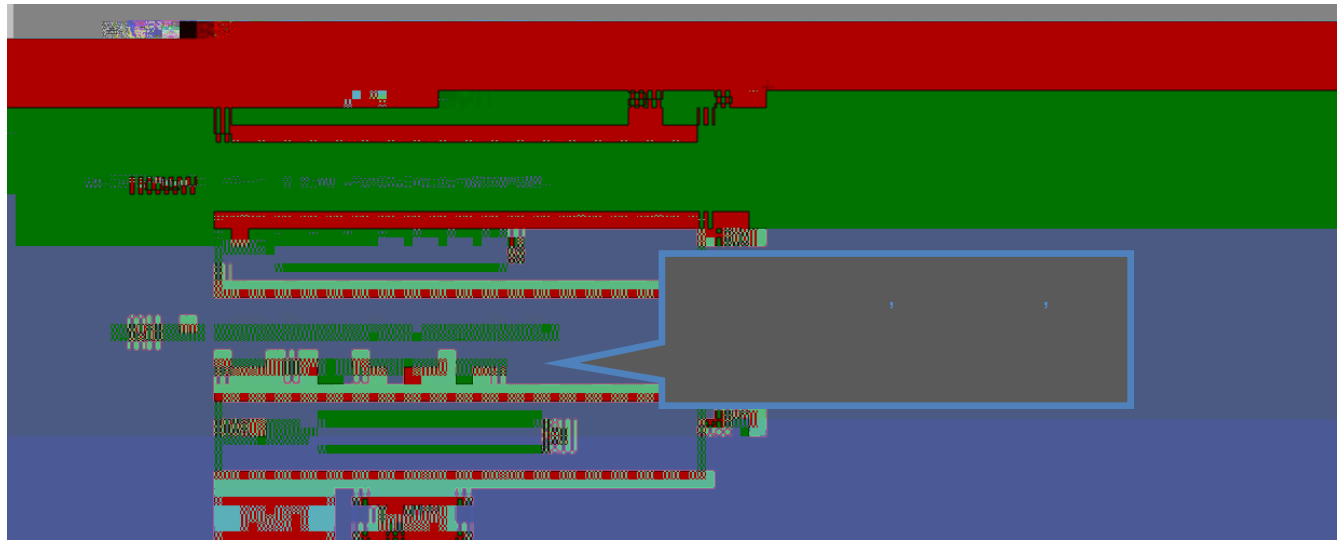

HTTP

IP IP IP 50
IP
IP , 50

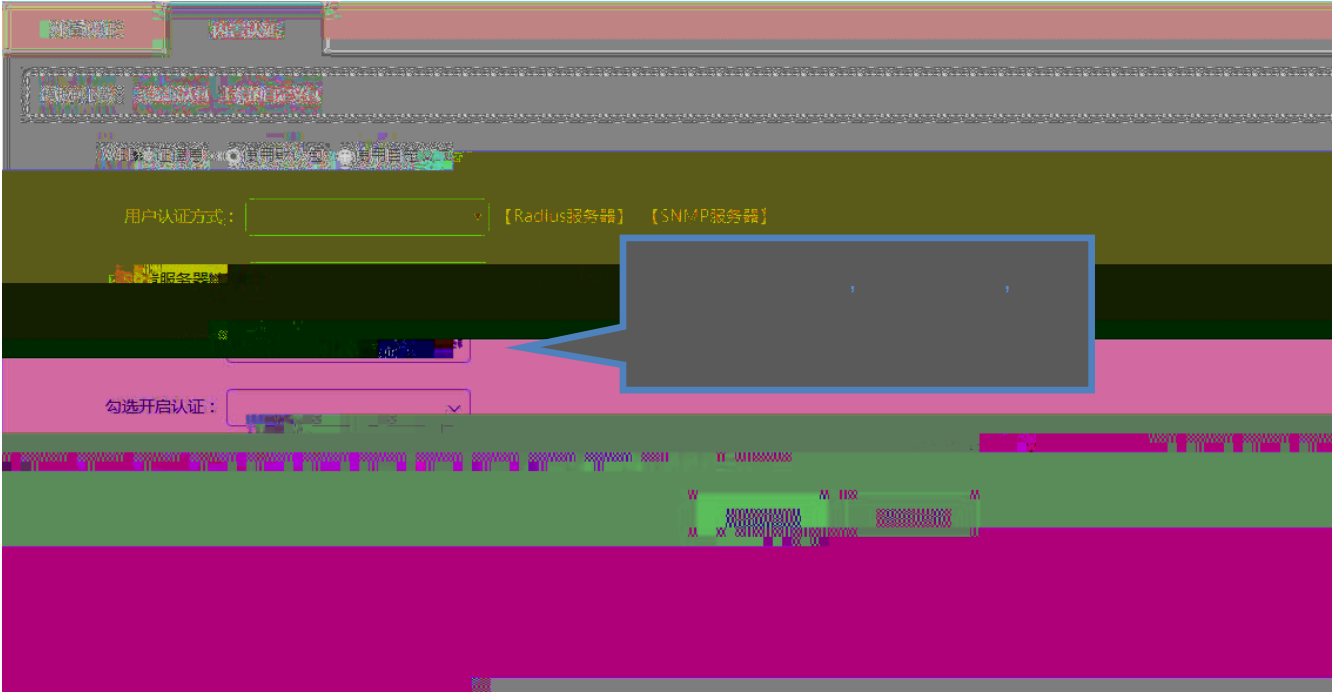

WEB

portal

8081

Wi-Fi

1.3.3.5.2 Wi-Fi

Wi-Fi

Wi-Fi

Wi-Fi

Wi-Fi 3.X

Wi-Fi +

Web


(WEB

wechat)

Wi-Fi

cwmp

CLI

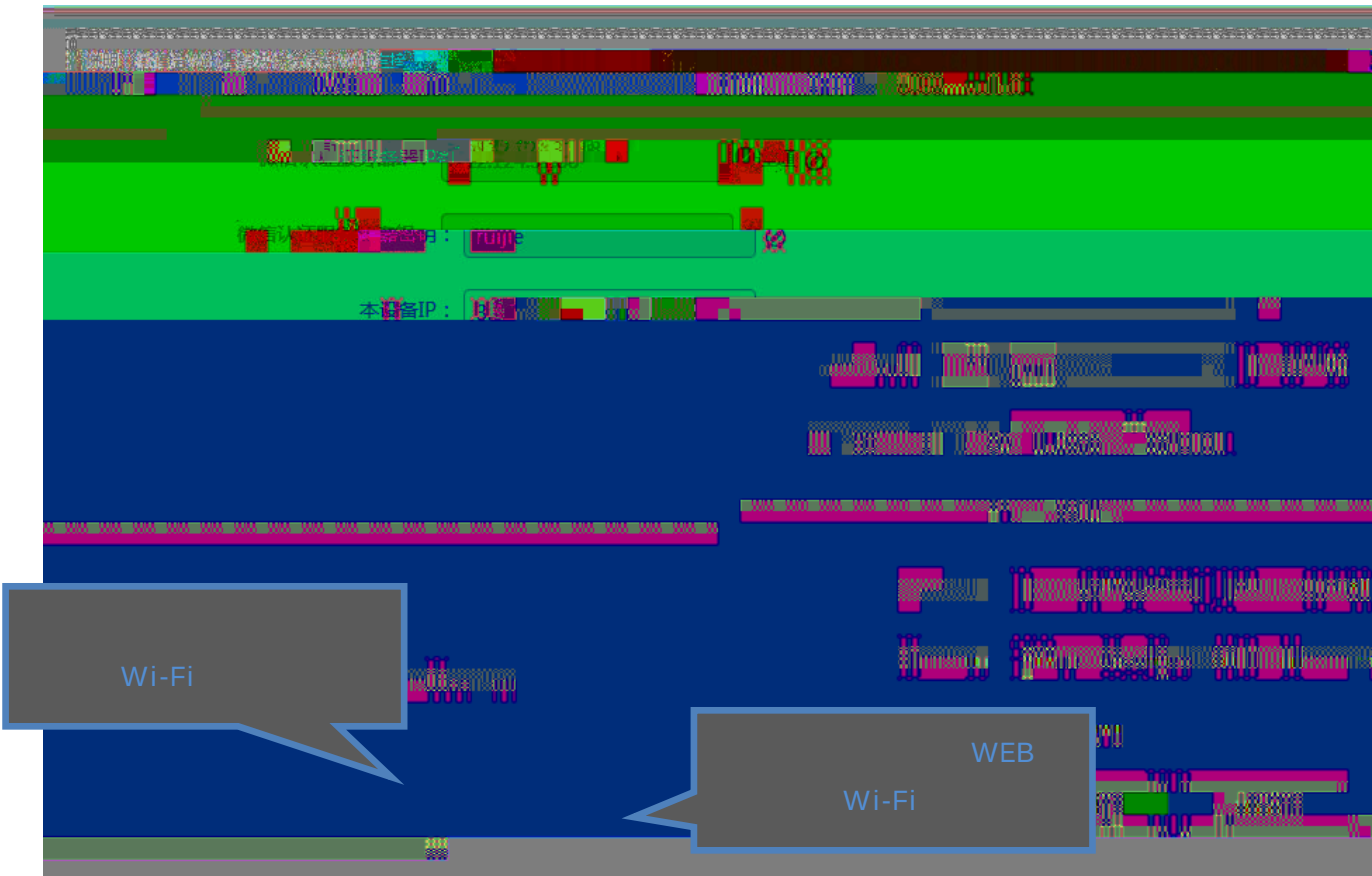

IP

112.124.31.88

IP

IP:

IP

WMC




NAS IP


Wi-Fi

Wi-Fi


DNS

DNS,

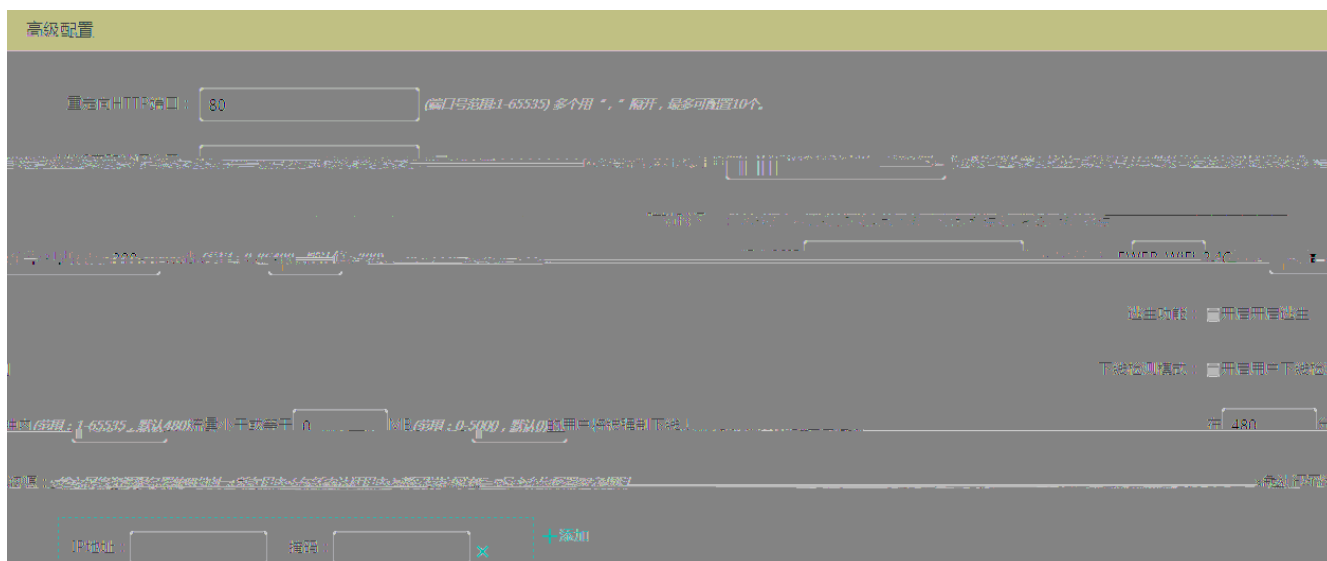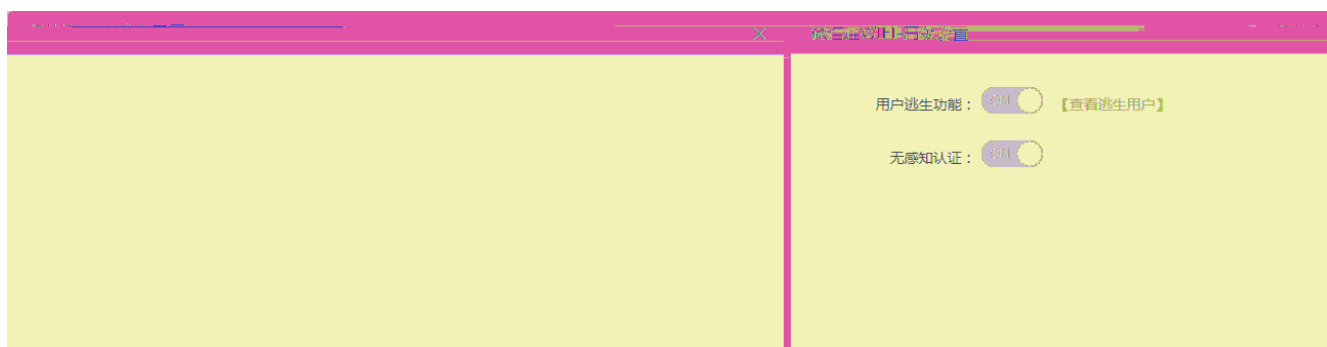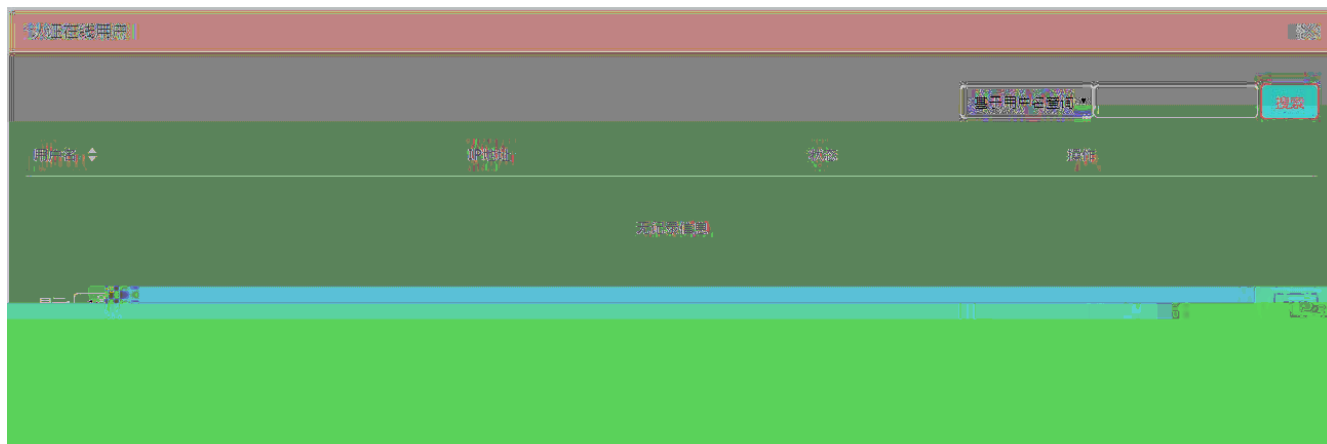

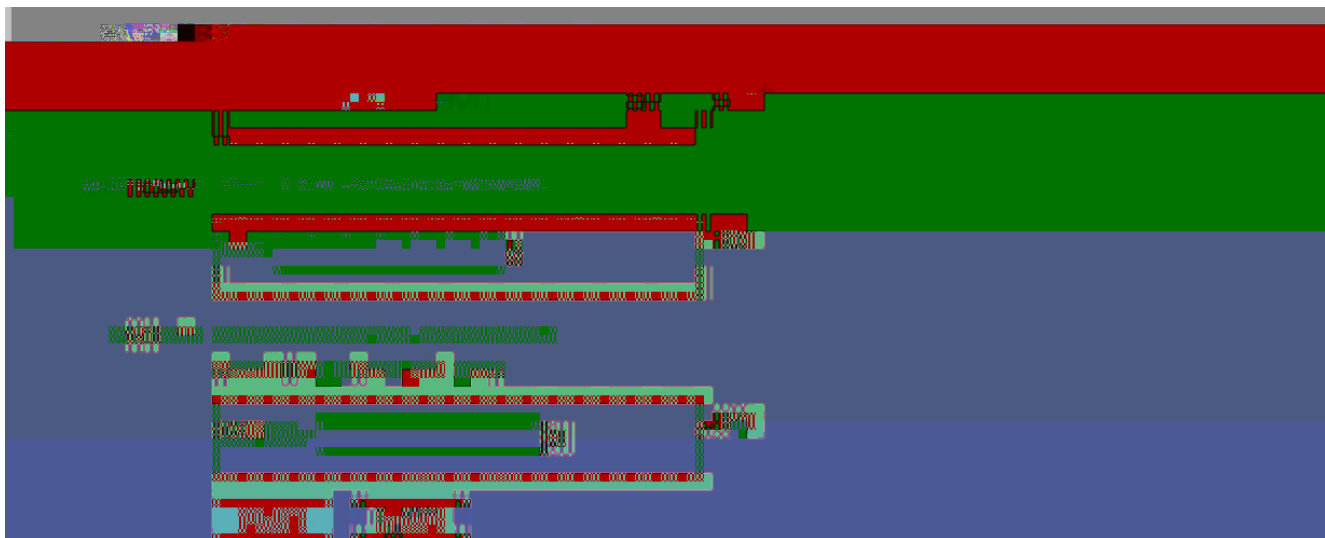

1.3.3.5.3 WiFiDog

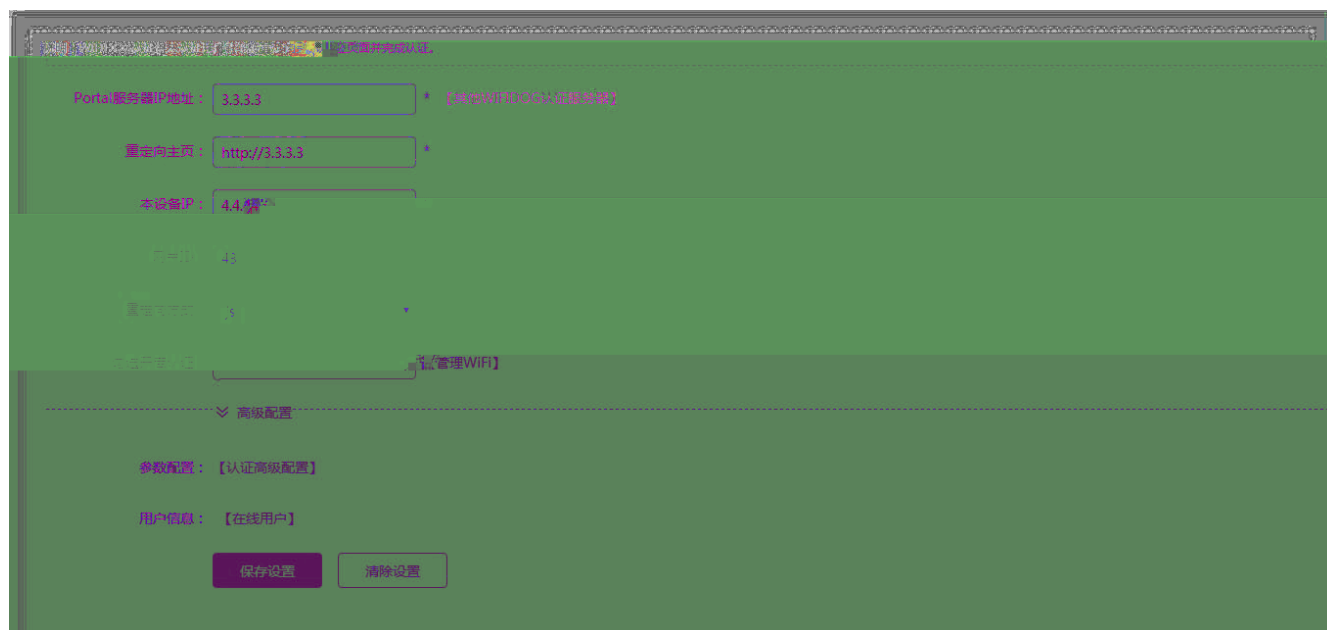

WiFiDog



Portal IP

portal

Portal

IP

WiFiDog

ip

ip

http

JavaScript

JavaScript

ID


WiFiDog

gw-id

Wi-Fi

Wi-Fi


WiFiDog

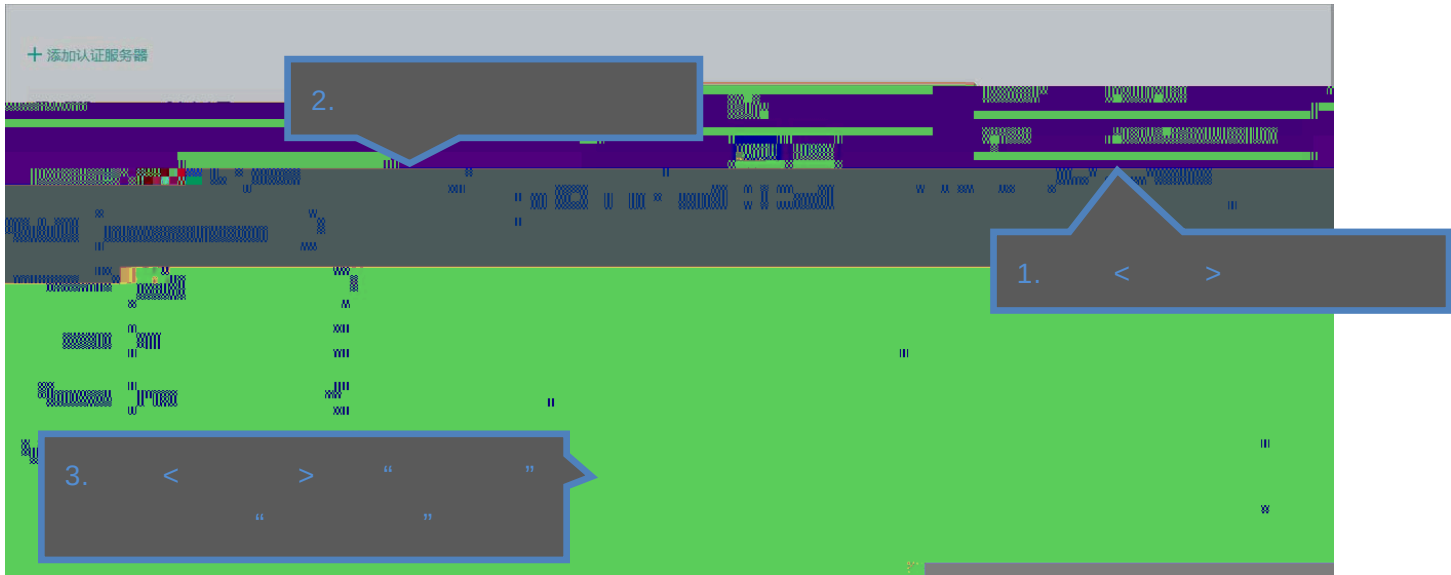


1.3.3.6

1.3.3.6.1

AP

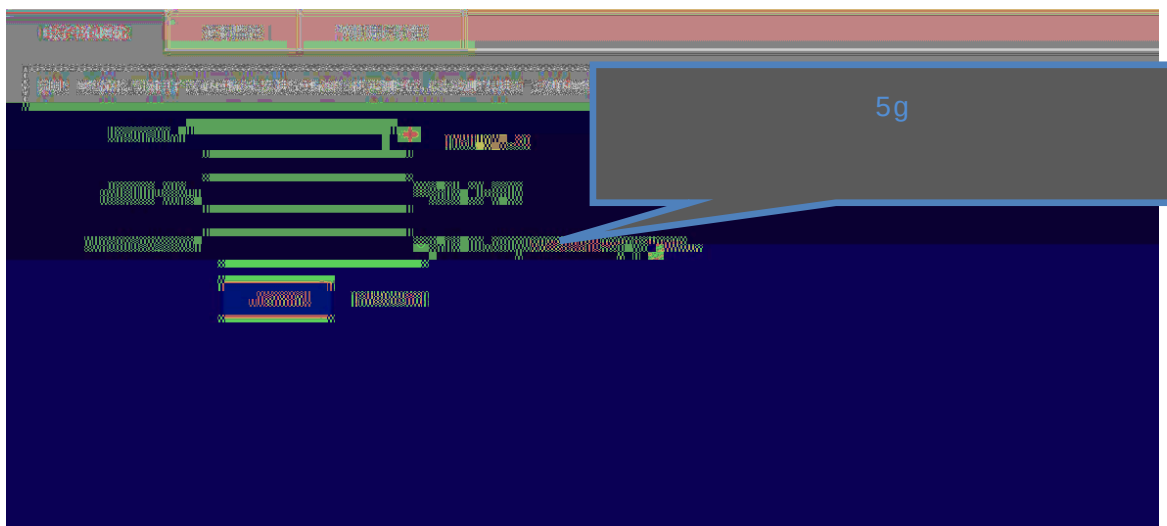



" 5G

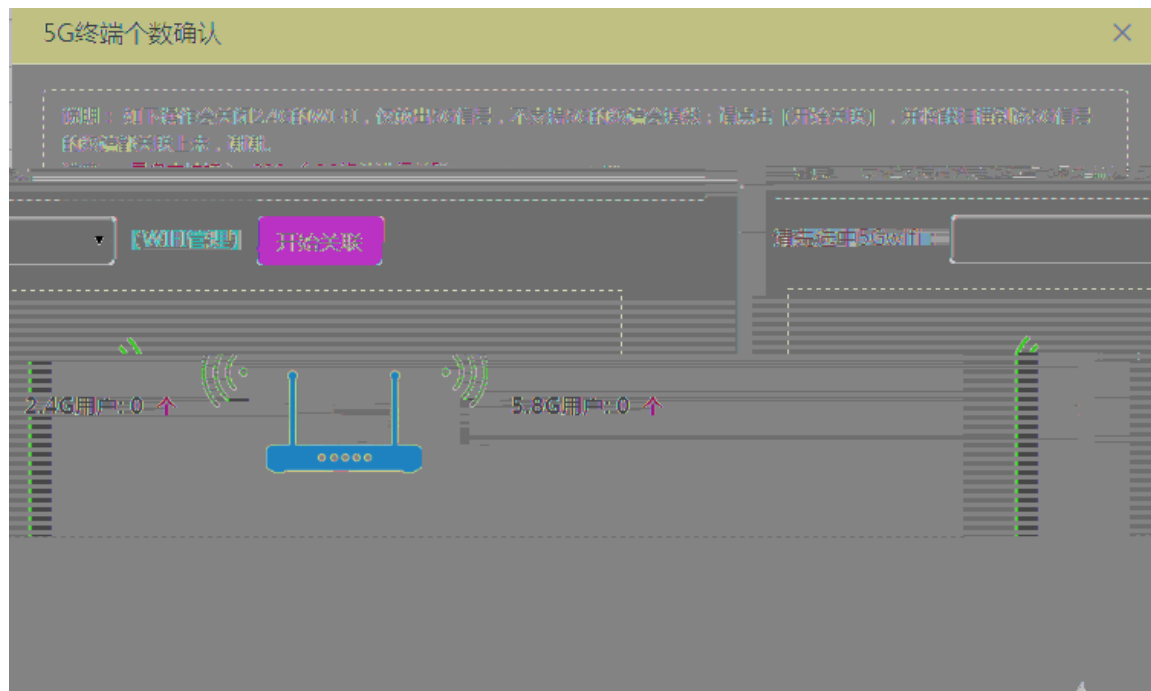


5gWi-Fi


5g

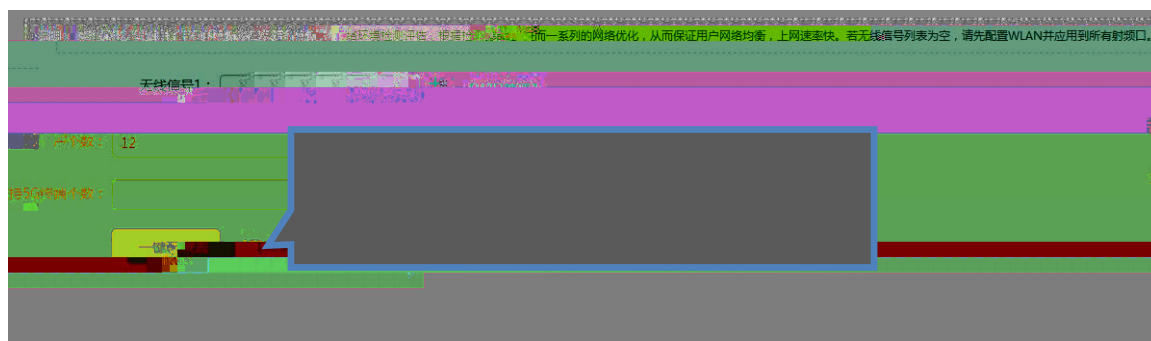


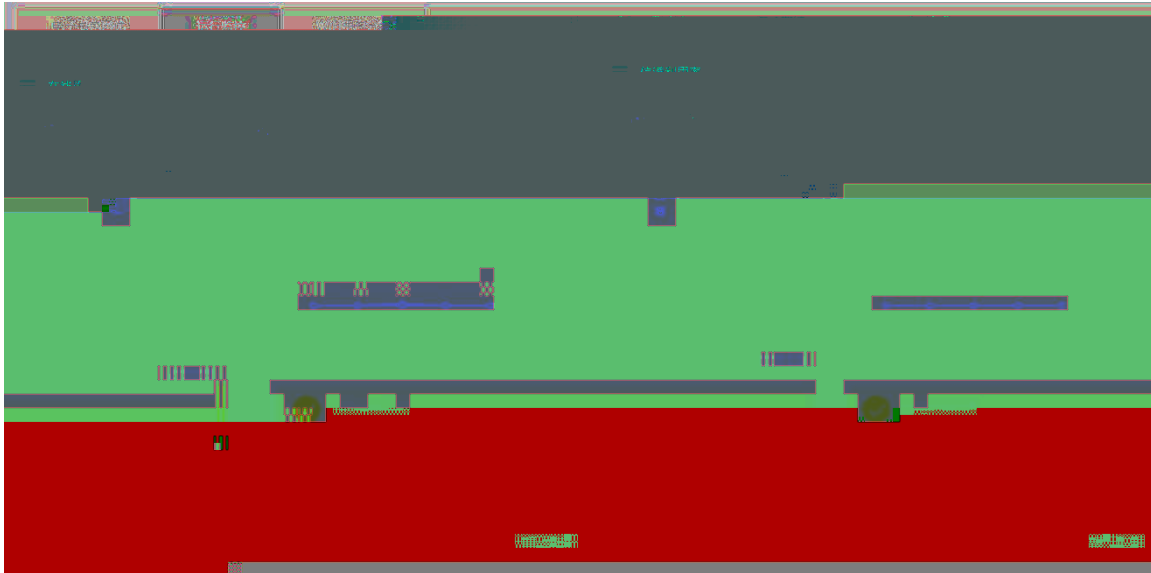

WI-FI

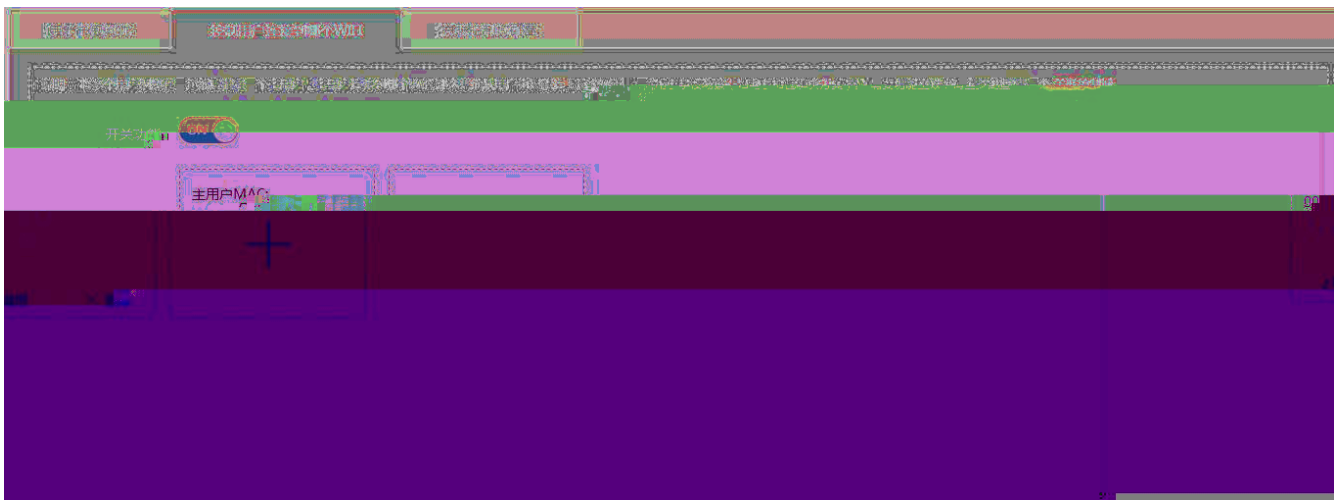


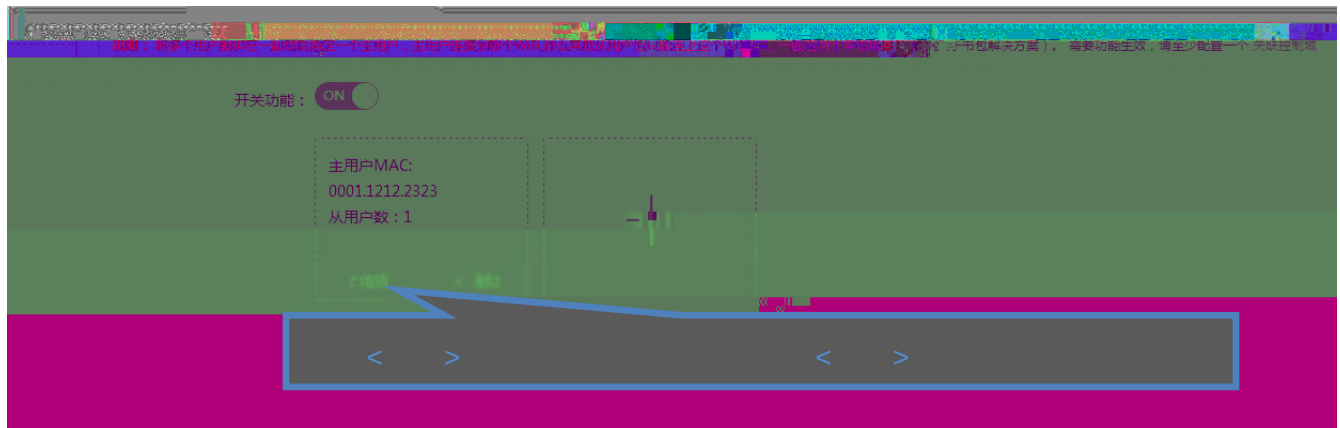

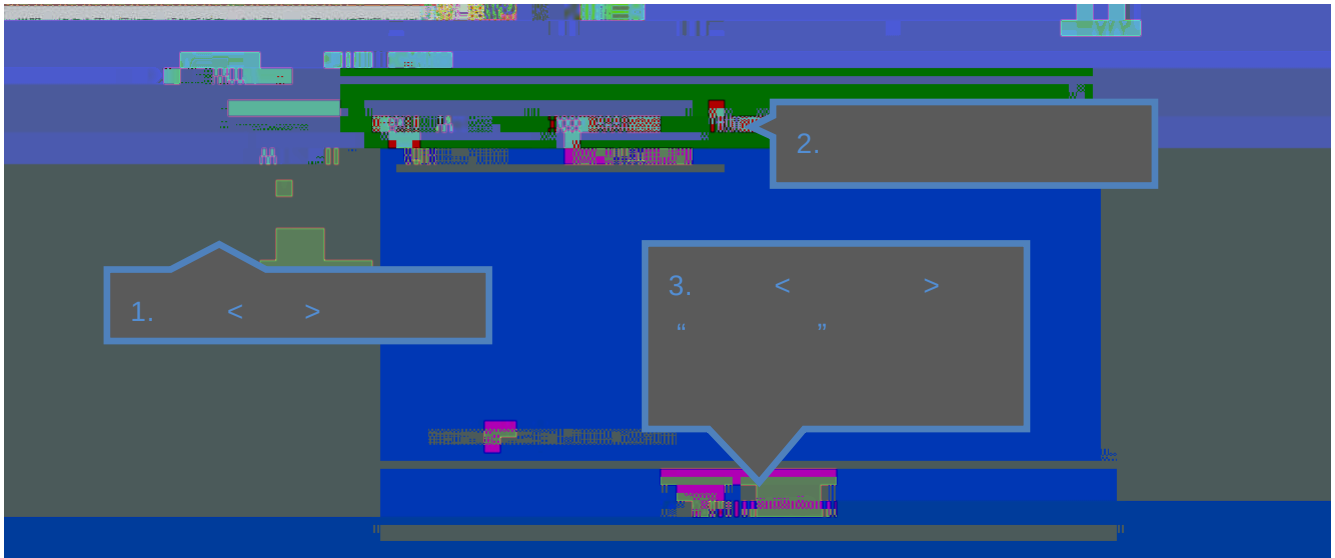


1.3.3.7

1.3.3.7.1 /

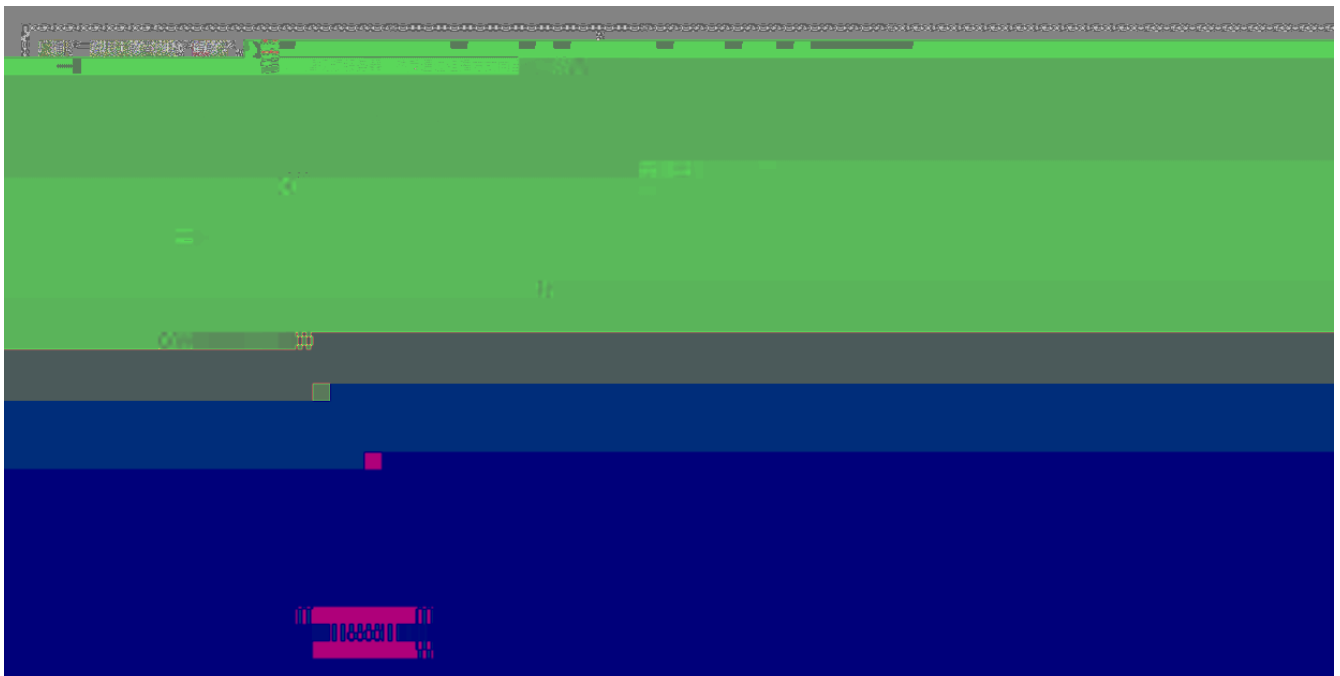


1.3.3.7.2

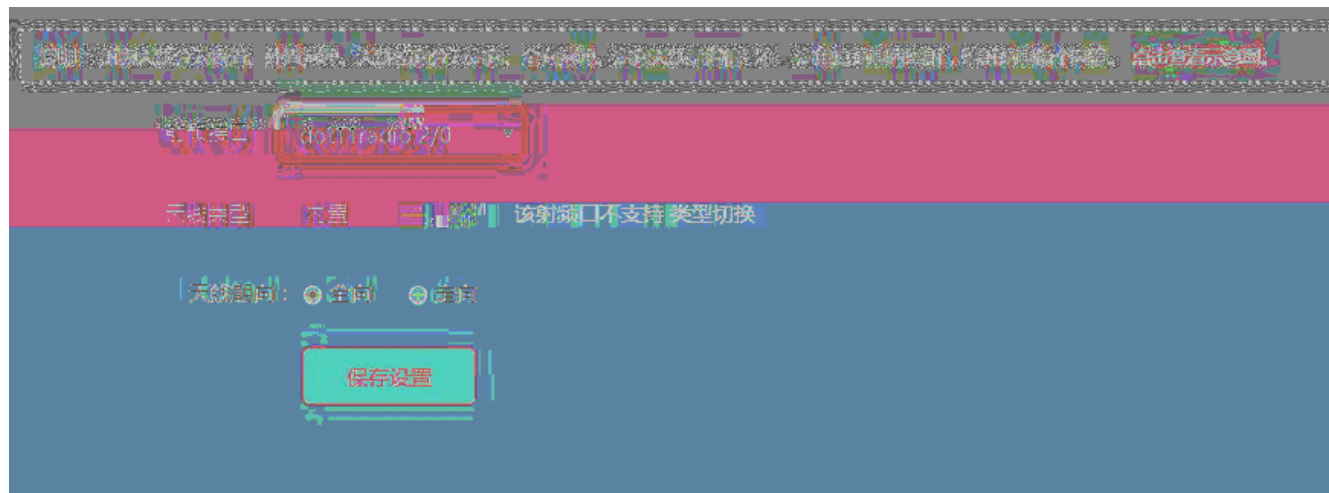

1.3.4

1.3.4.1

1.3.4.1.1

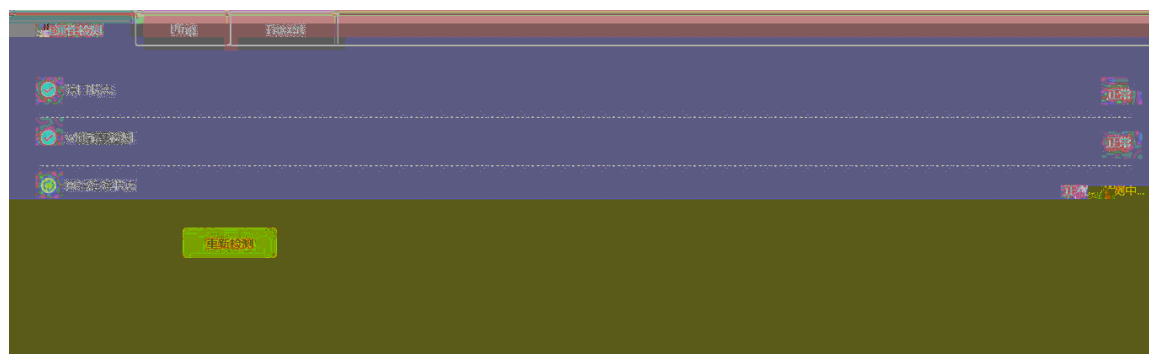


UP

Wi-Fi

Wi-Fi

Ping

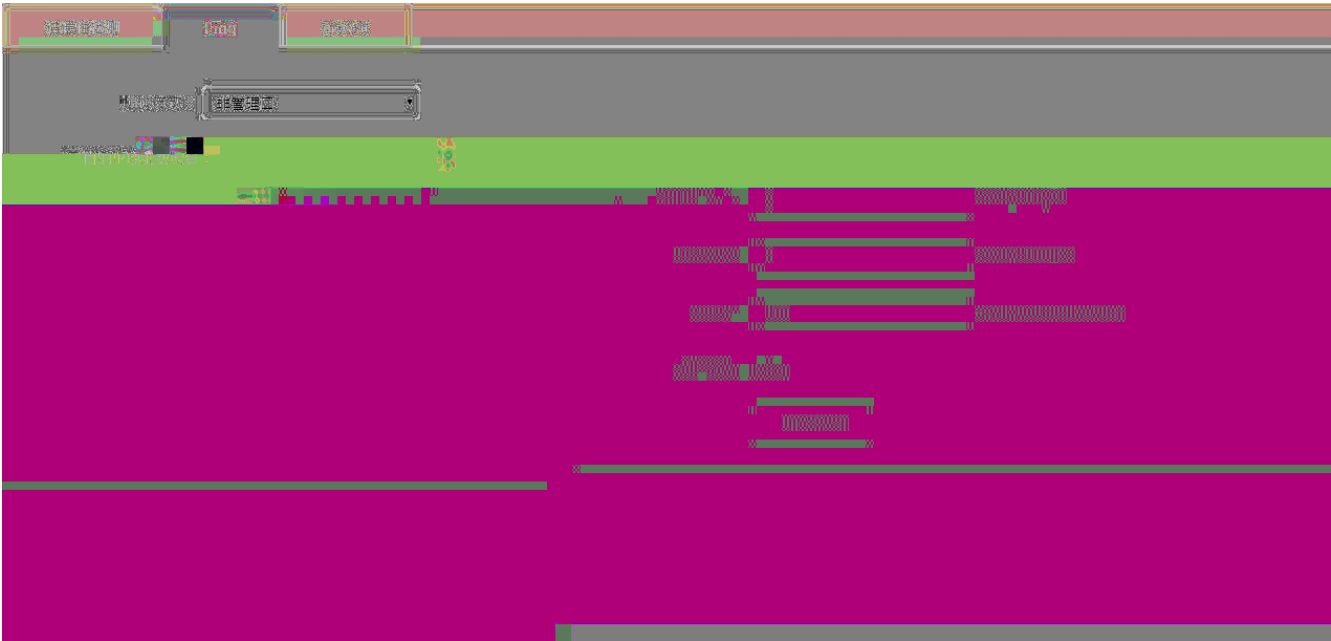

PING


MGMT

MGMT

IP

ping

IP DF DF 1 DF 5 n p n <

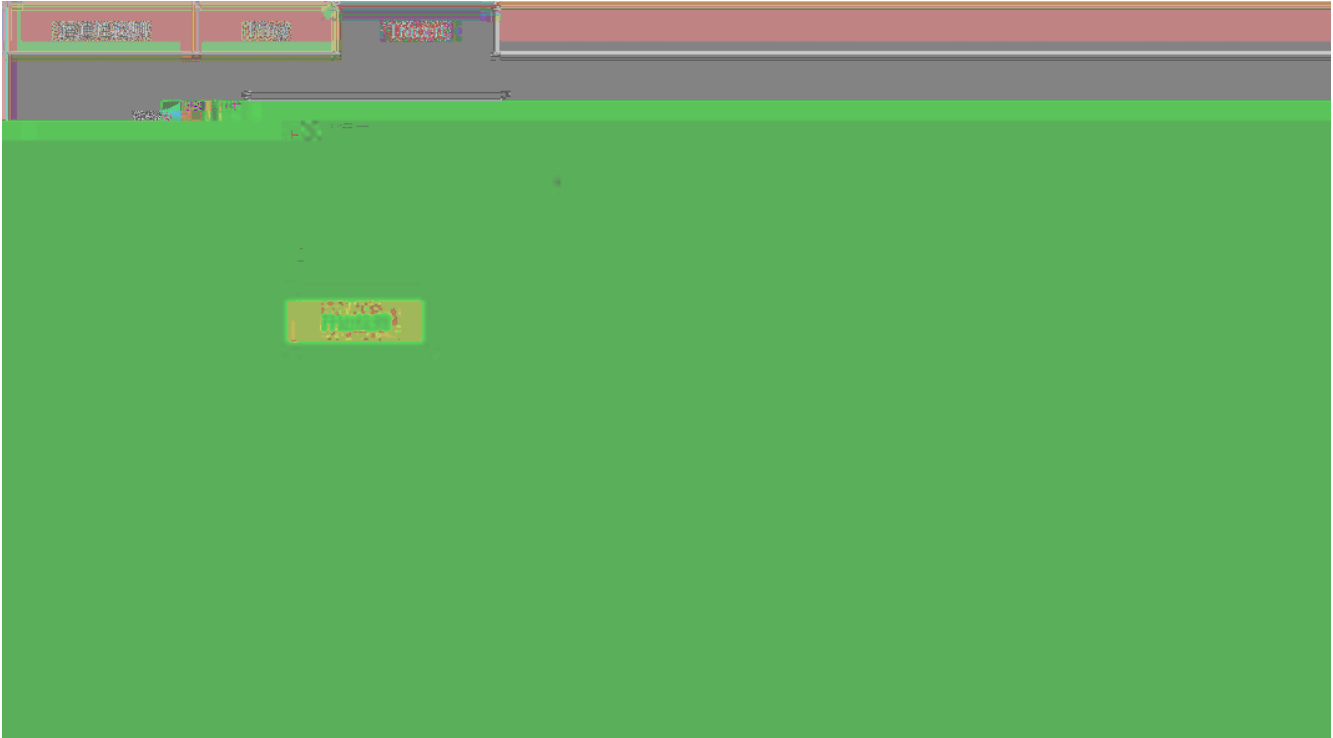

Tracert

MGMT


MGMT

IP

Tracert

1.3.4.2




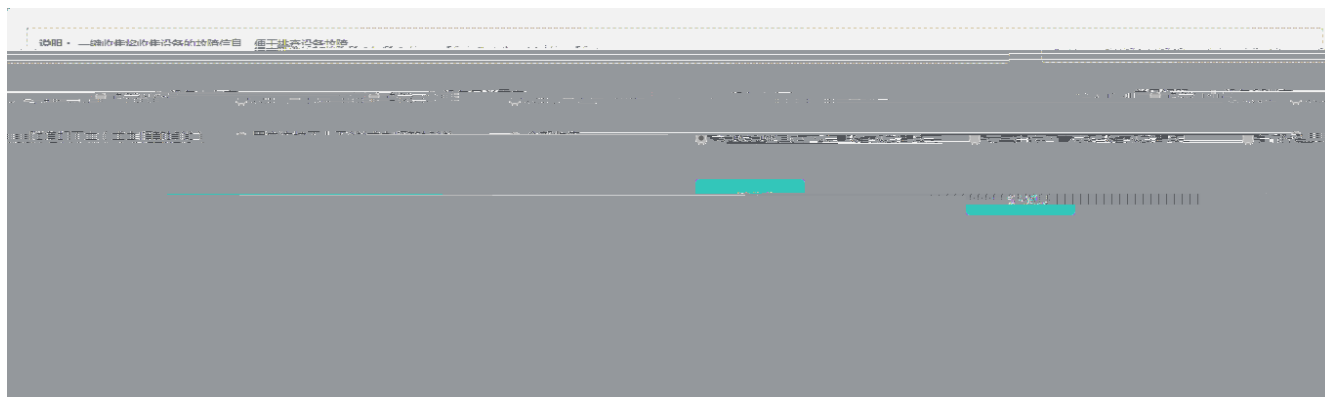

1.3.4.3

1.3.4.3.1

syslog

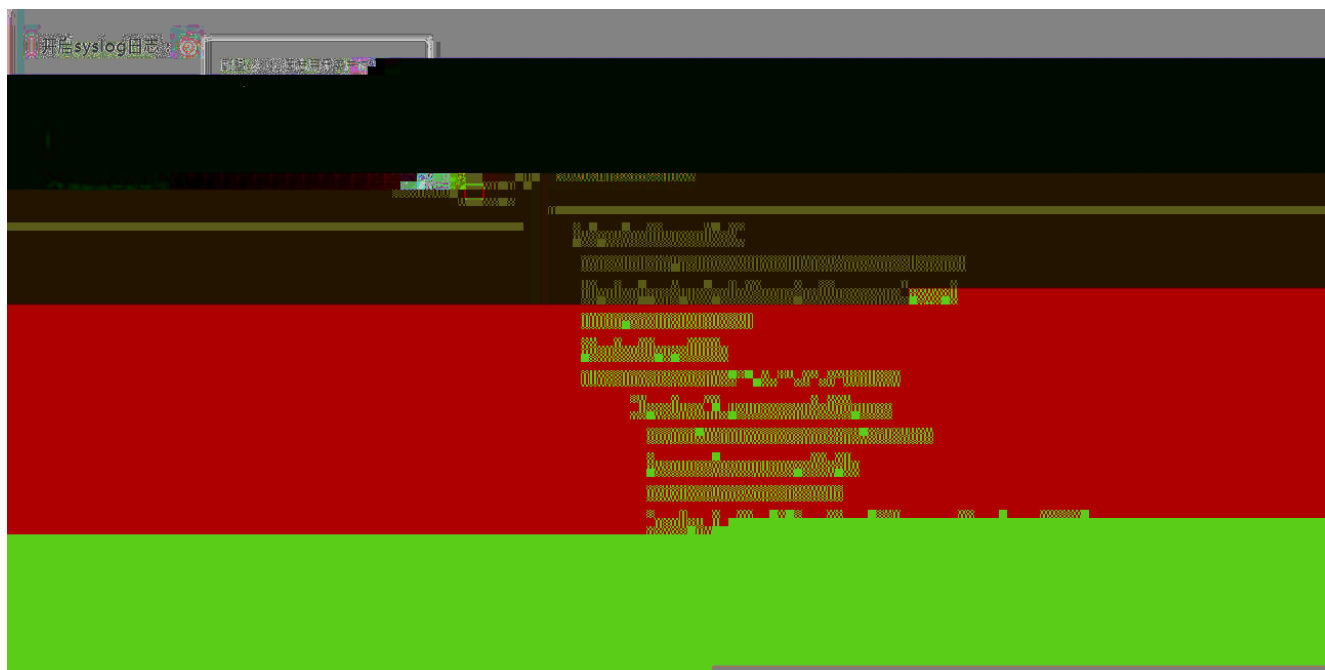


1.3.4.4

1.3.4.4.1 AP

AP AP AP

SSID AC Wi-Fi ,

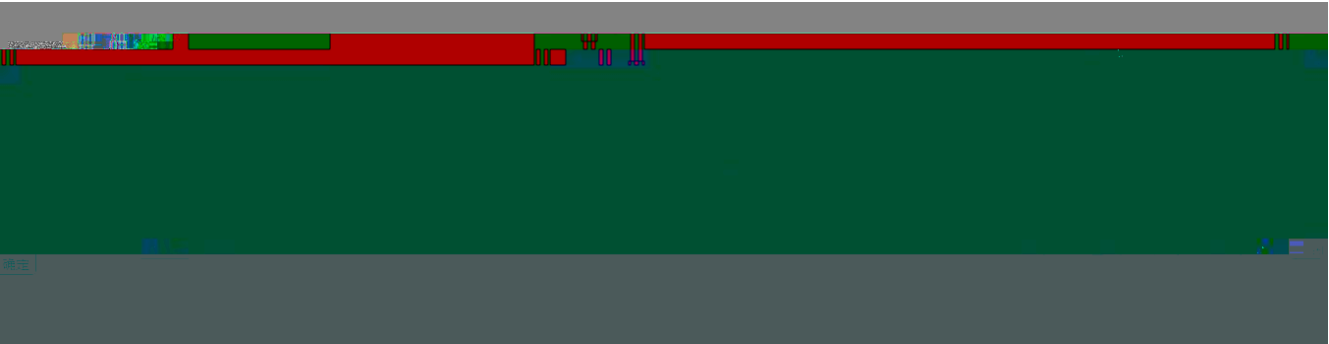

AdHoc AP AdHoc



ROUGE




CONFIG mac SSID




1.3.5

1.3.5.1



1.3.5.1.1 AP

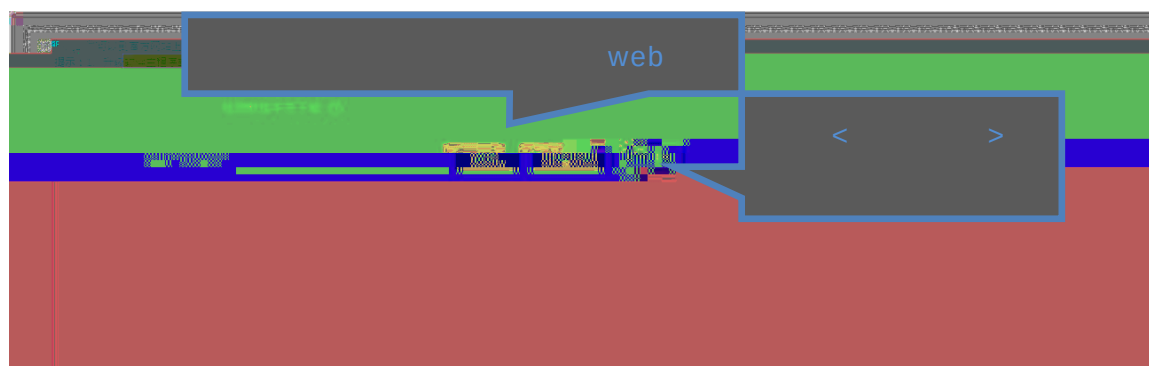

1.3.5.1.2 AP

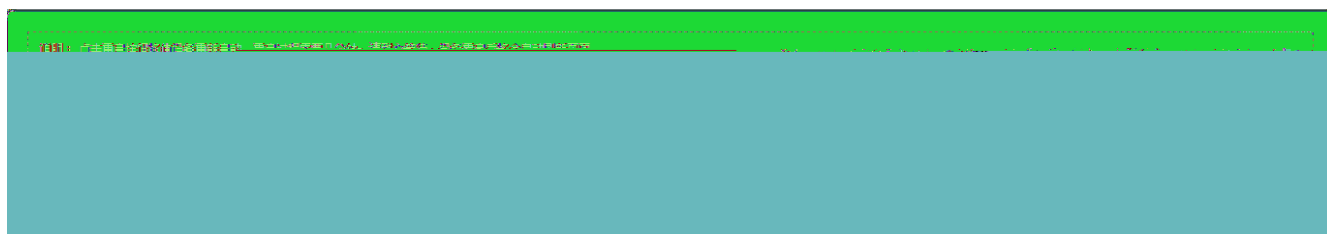


1.3.5.1.3

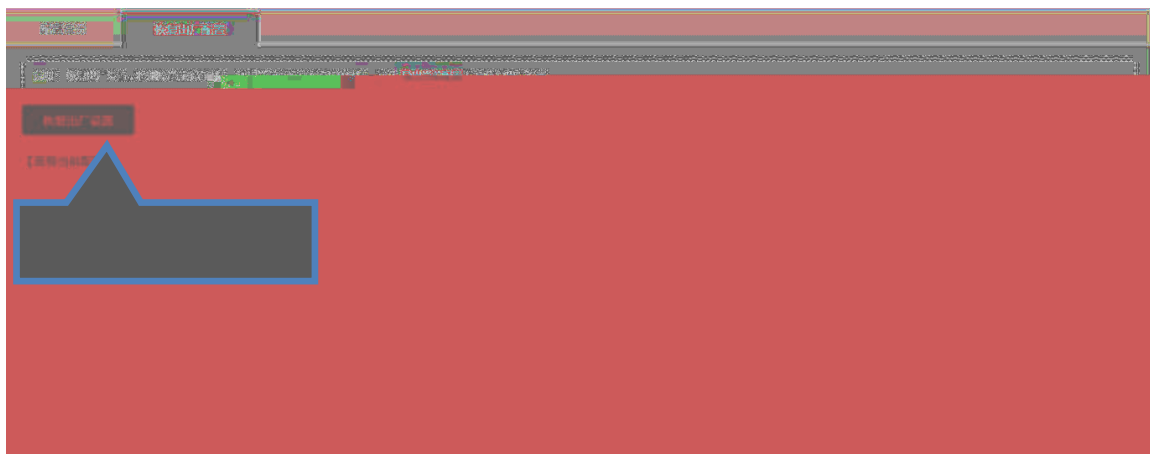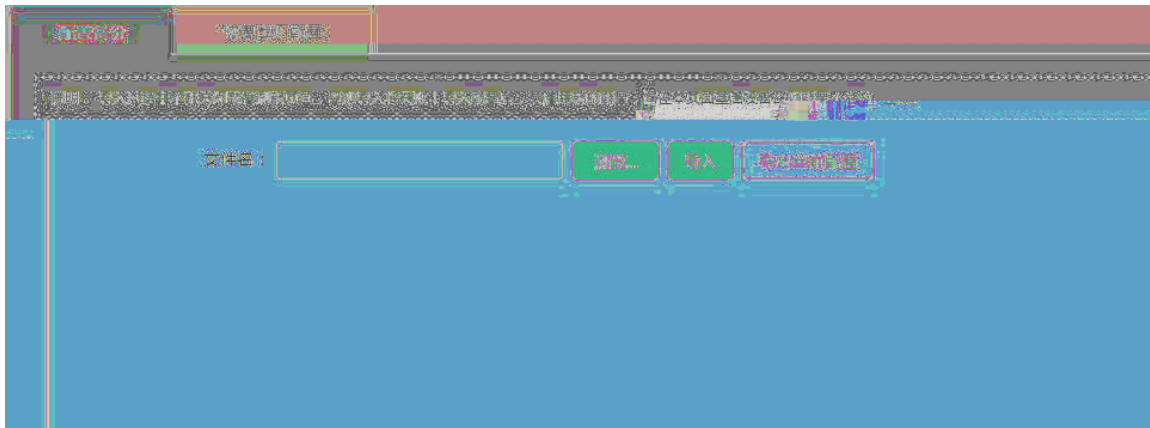

ip

WEB

1.3.5.1.4

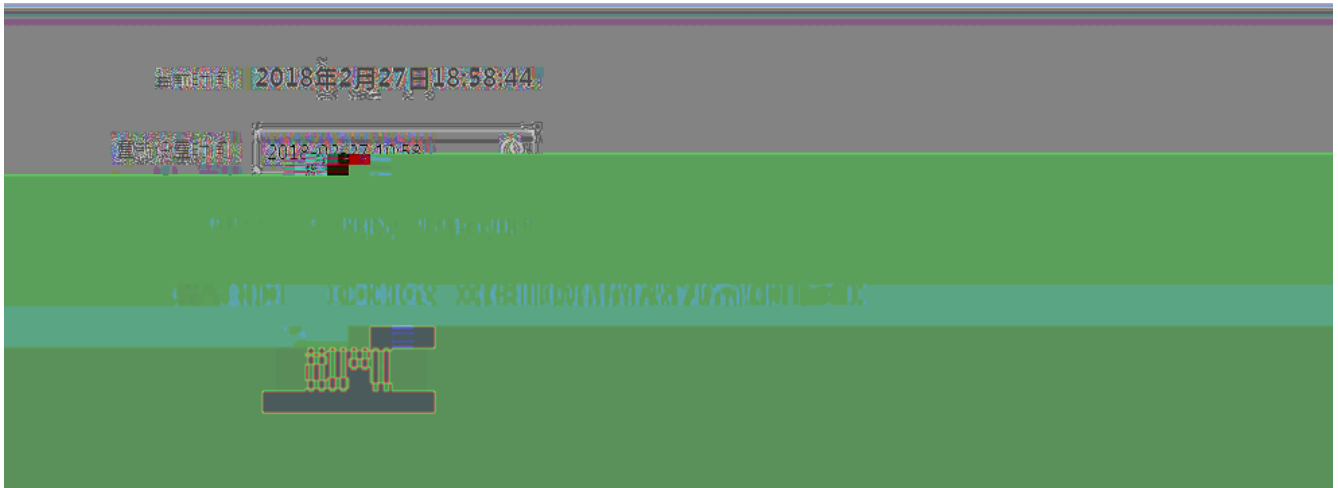

1.3.5.1.5

AP


ap



ap




1.3.5.1.6

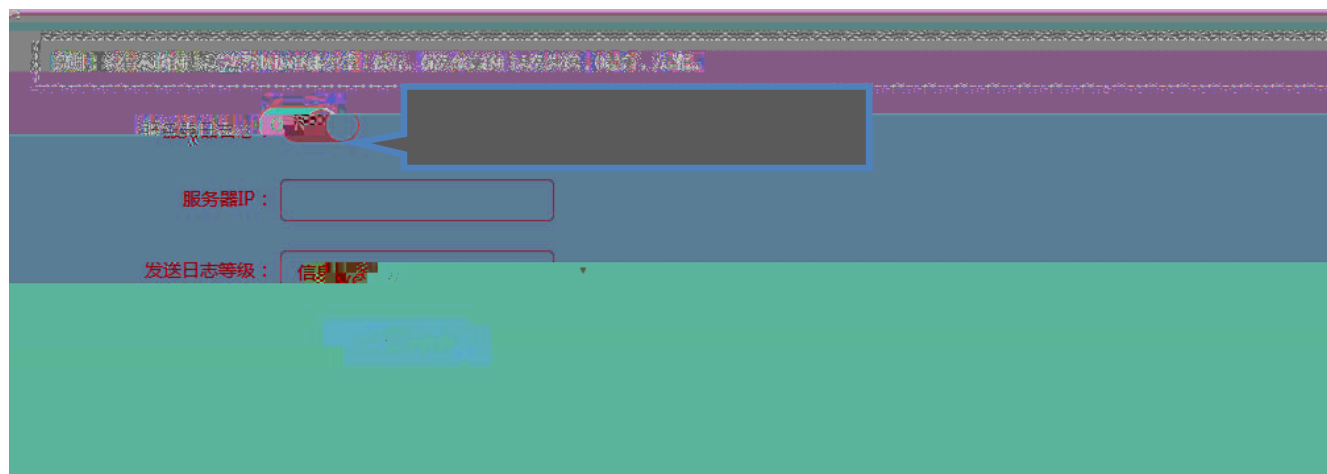


1.3.5.1.7 DNS

DNS

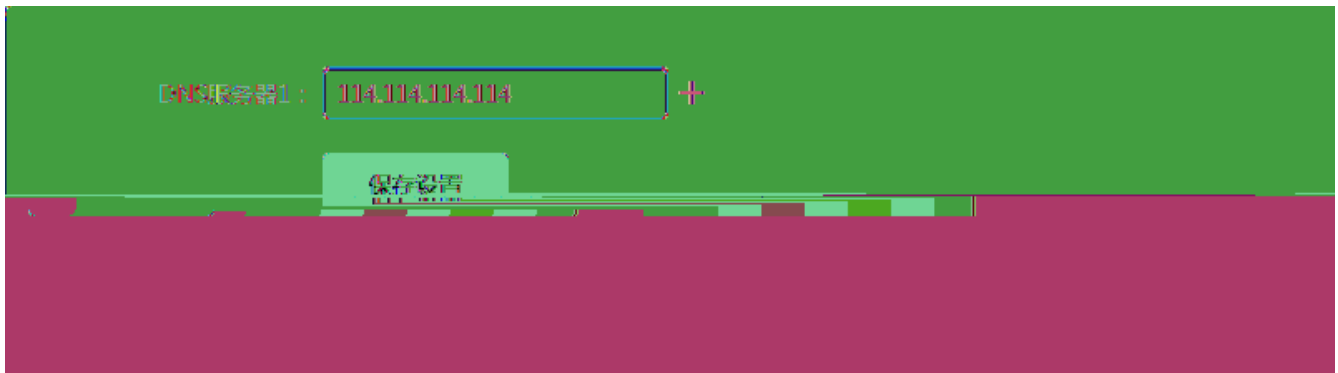

1.3.5.2


1.3.5.2.1 WEB


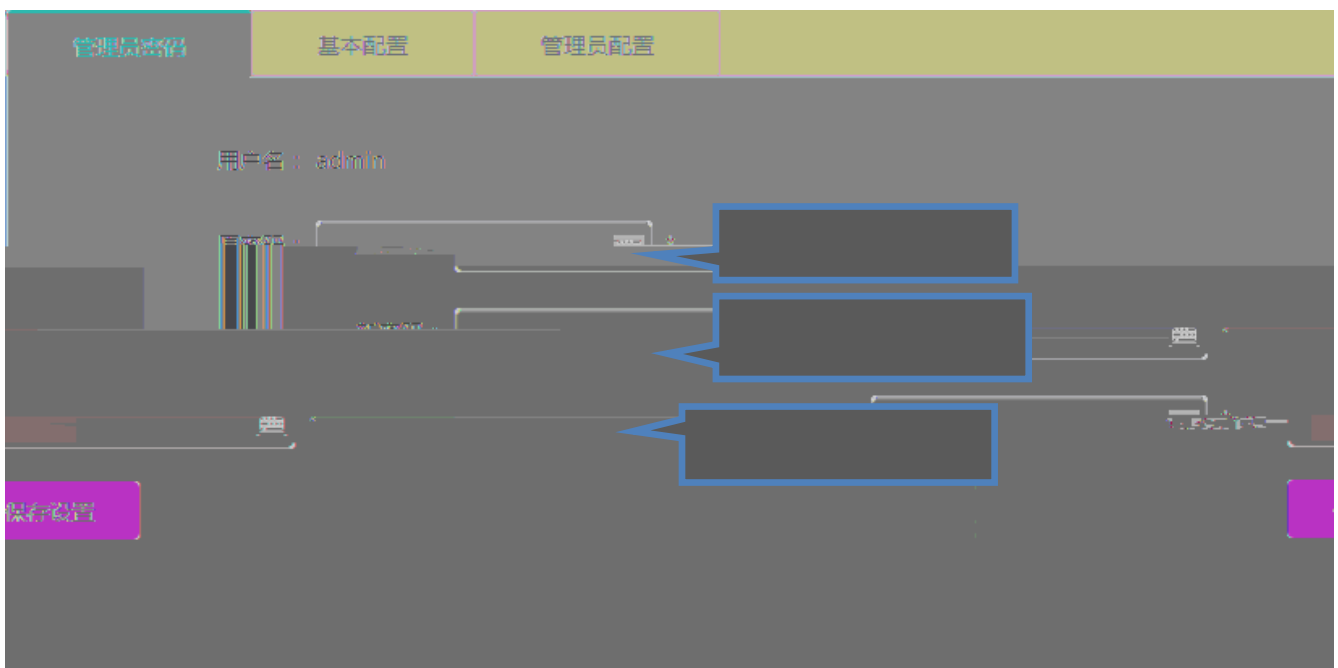



WEB



admin

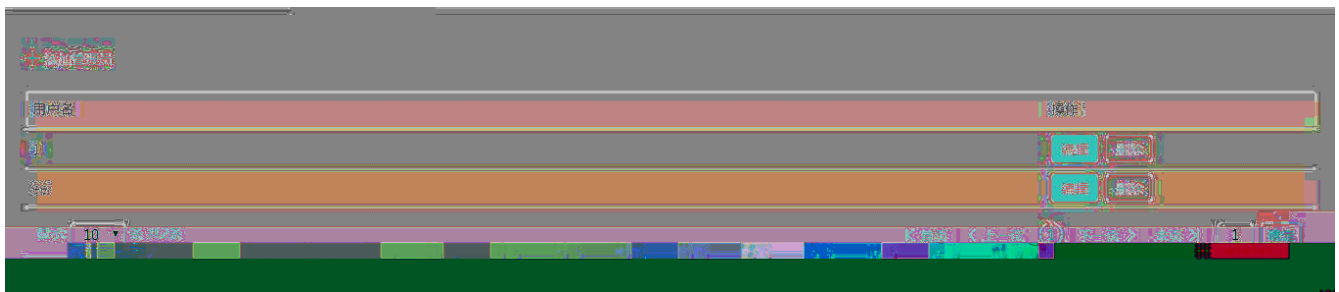

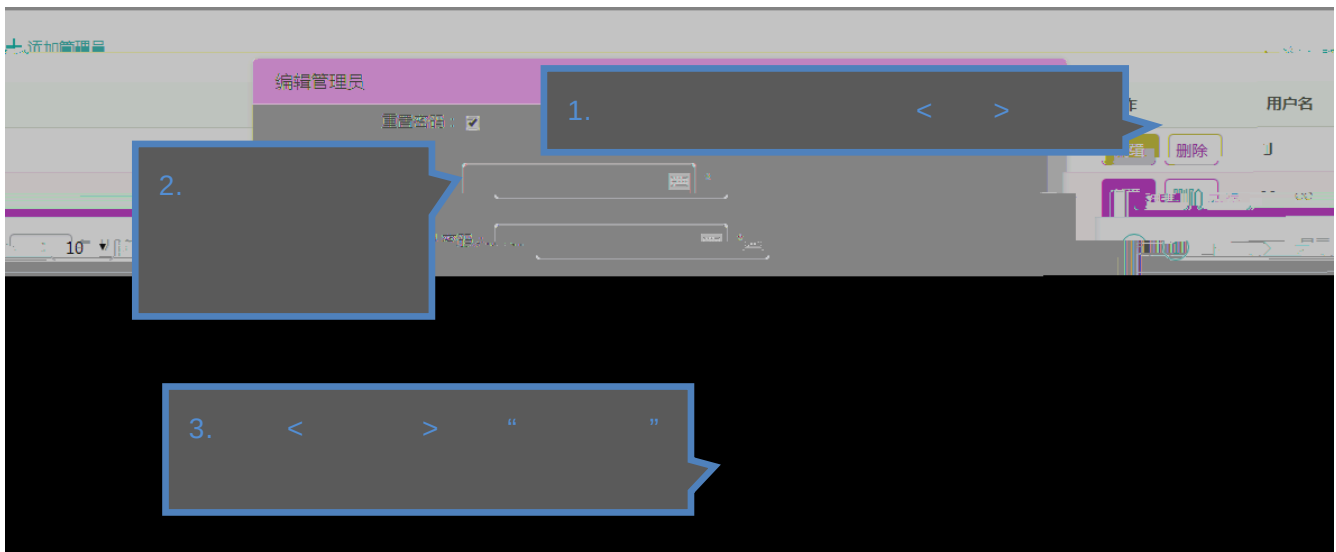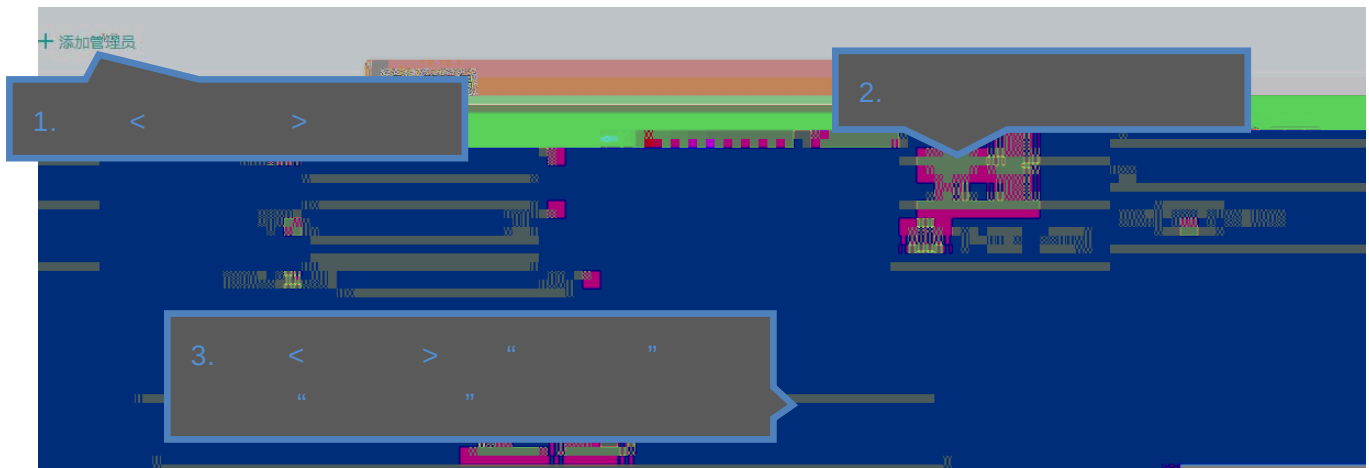

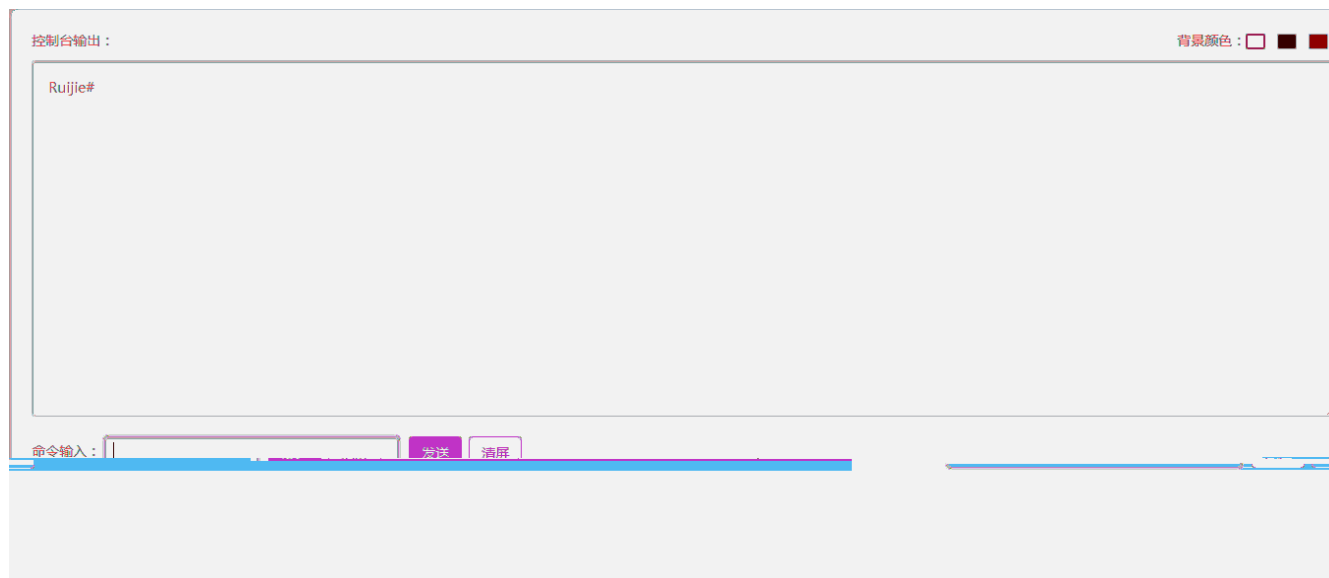

1.3.5.2.4 SNMP

SNMP





1.3.6

1.3.6.1



10

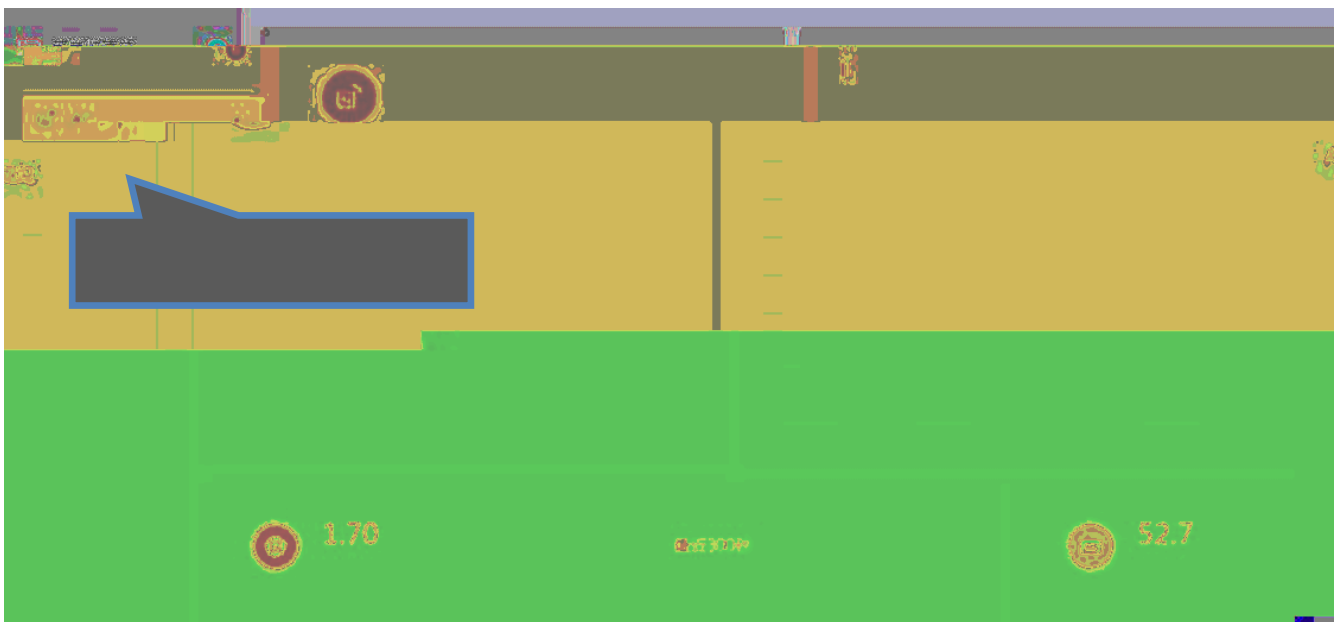


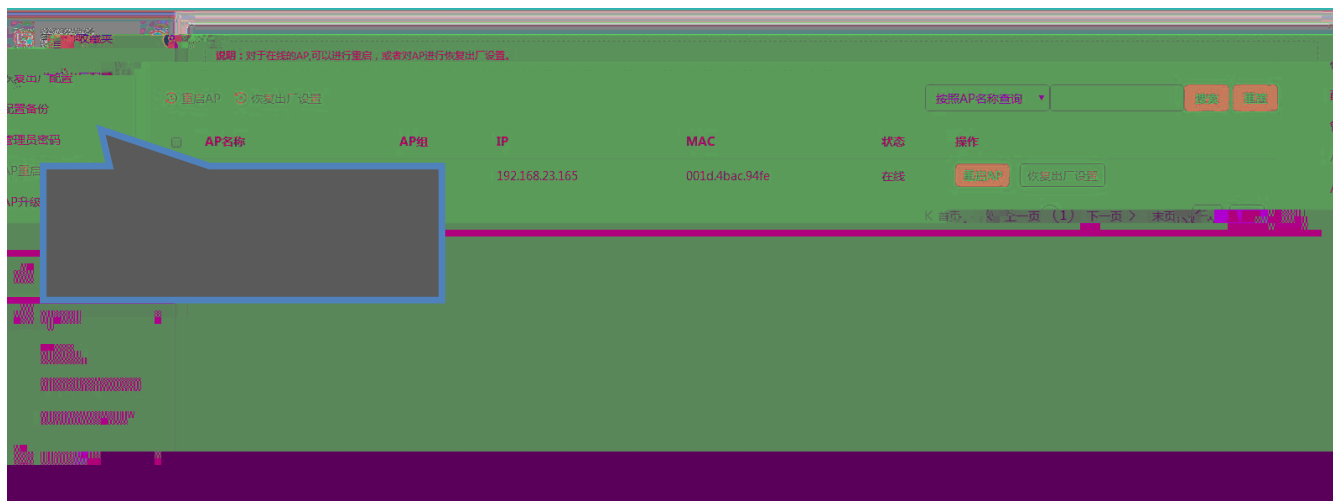

1.3.6.2



1.3.6.3

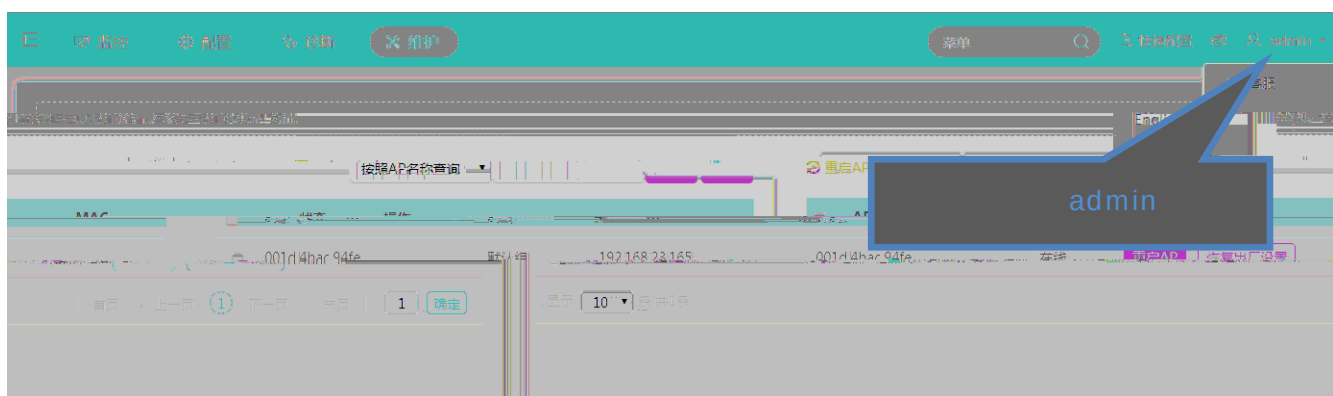


[illegible]

AP




1.4.1.2

“ ” “ ”

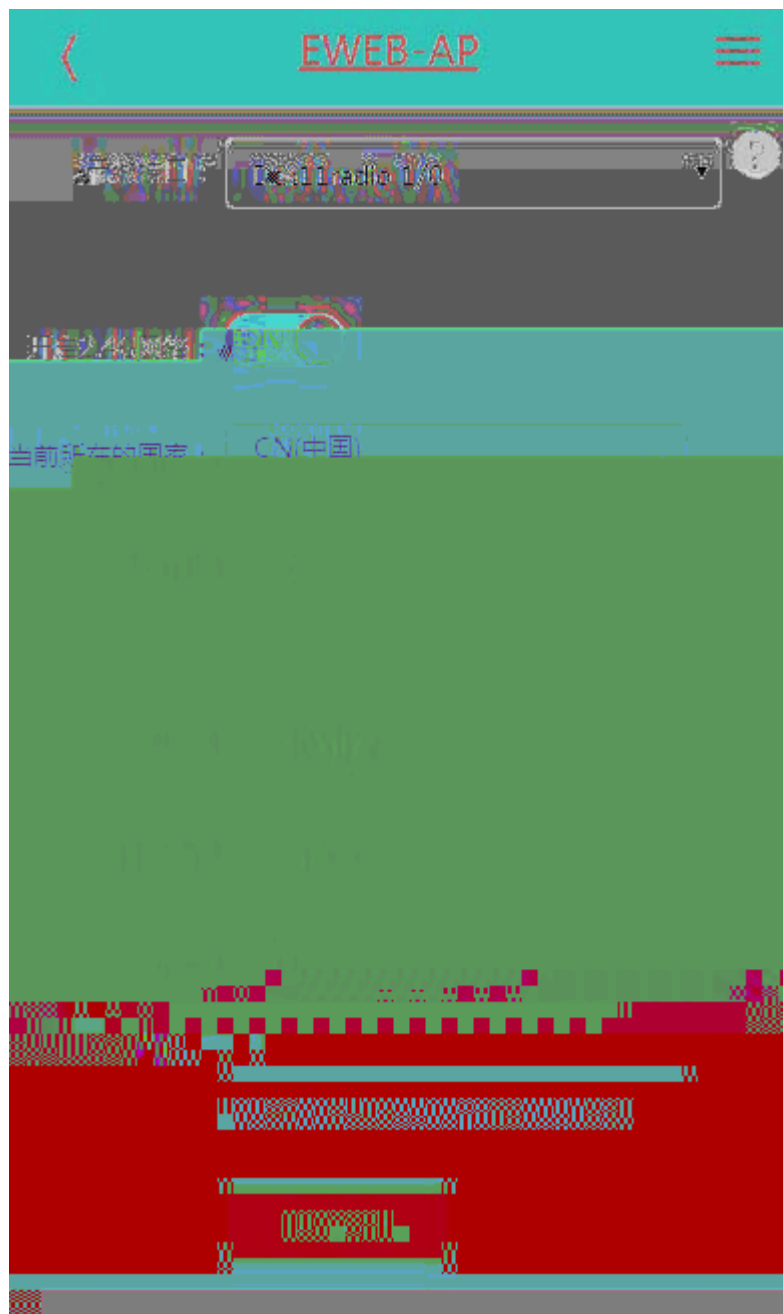

1.4.1.4

“ ”

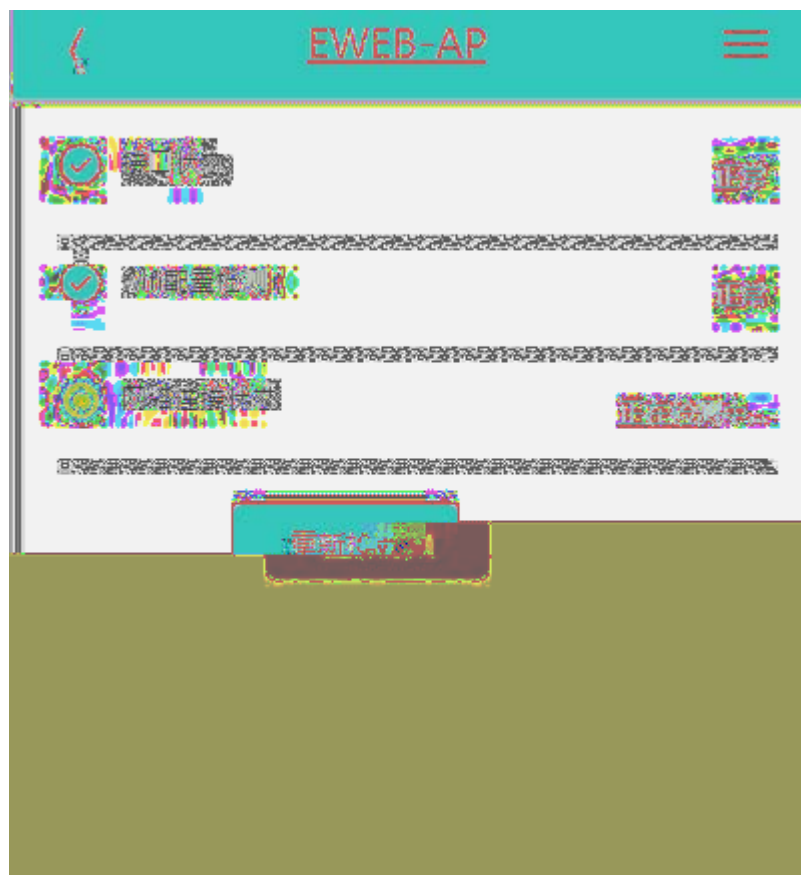


1.4.1.5 DNS

“ DNS ”

dns

DNS

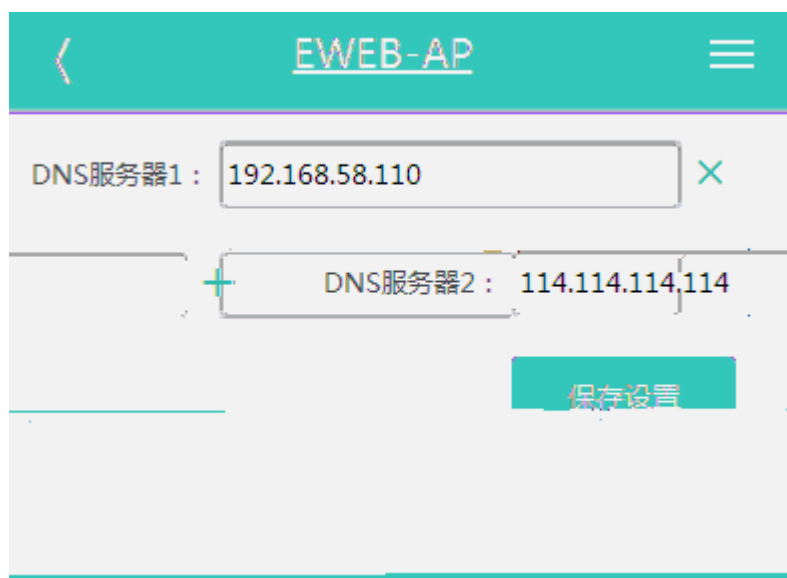

1.4.1.6

“ ”

AP



1.4.1.7

“ ”



1.4.1.8

“ ”



The screenshot shows the 'Web网管密码修改' (Web Management Password Modification) page in the EWEB-AP interface. The page has a teal header with a back arrow, the title 'EWEB-AP', and a menu icon. The main content area is light gray. It displays the username 'admin' and three password input fields labeled '原密码:' (Original Password), '新密码:' (New Password), and '确认密码:' (Confirm Password). Each input field has a small icon on the right. Below the fields is a teal button labeled '保存设置' (Save Settings). On the left side, there is a vertical teal bar with three gray boxes, each containing an asterisk.

< EWEB-AP

Web网管密码修改

用户名：admin

* 原密码：

* 新密码：

* 确认密码：


保存设置

1.4.1.9





1.4.1.10

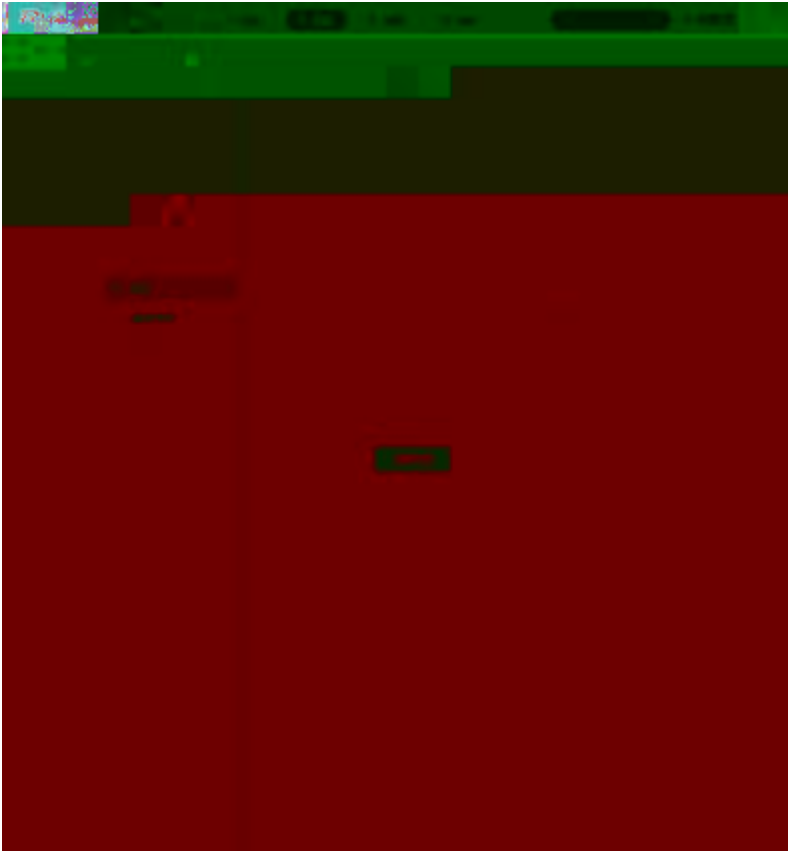

1.5 AP-EWEB


1.5.1 SmartAP -

SmartAP

AP

“ ”

SmartAP

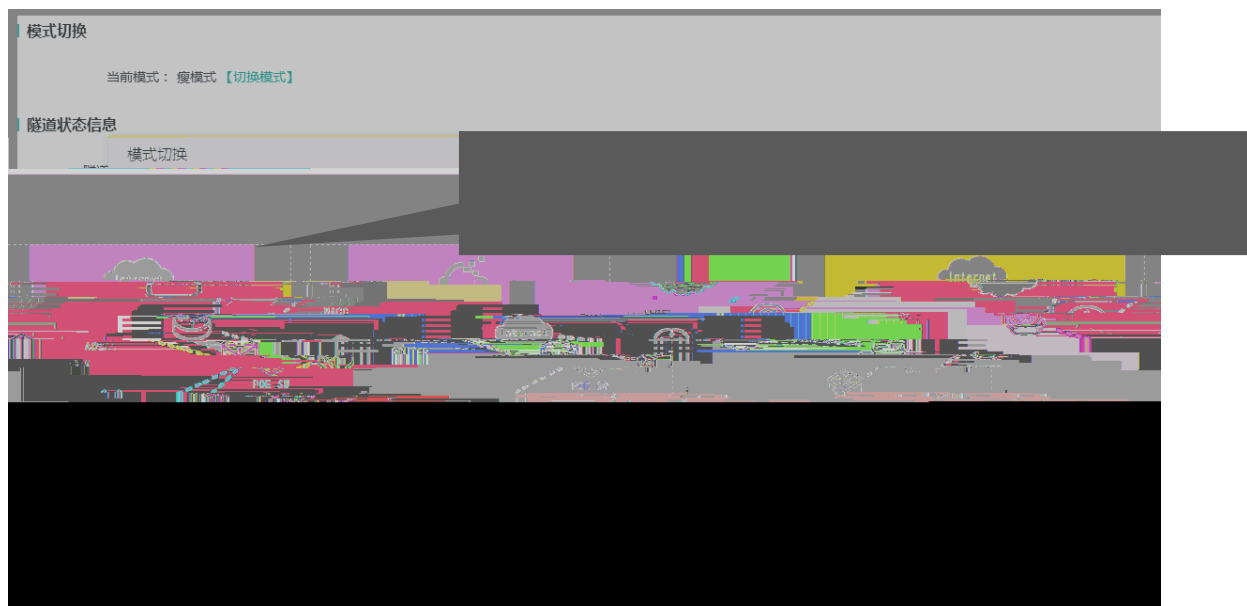

隧道配置

WiFi名称: PPPoE拨号时, 使用WiFi "dsdsdf" 登录, 通过192.168.120.1登录WEB

WiFi是否可见: ☐ 隐藏 (让别人看不到, 只能手动添加WiFi)

AC IP: AC

高级配置

接口名: MTU

密码: AP

MTU: AP

AP模式: ☐ 关闭 PPPOE IP DHCP

外网设置

联网类型: Wi-Fi

上网账号: *

上网口令:

http://192.168.120.1 WEB

WEB

WEB

WEB

admin/admin

guest/guest


IP

WEB


WEB

WEB

IP




show running-config




1.7 WEB

1.7.1 DHCP AP WLAN

AP AP dhcp AP
AP

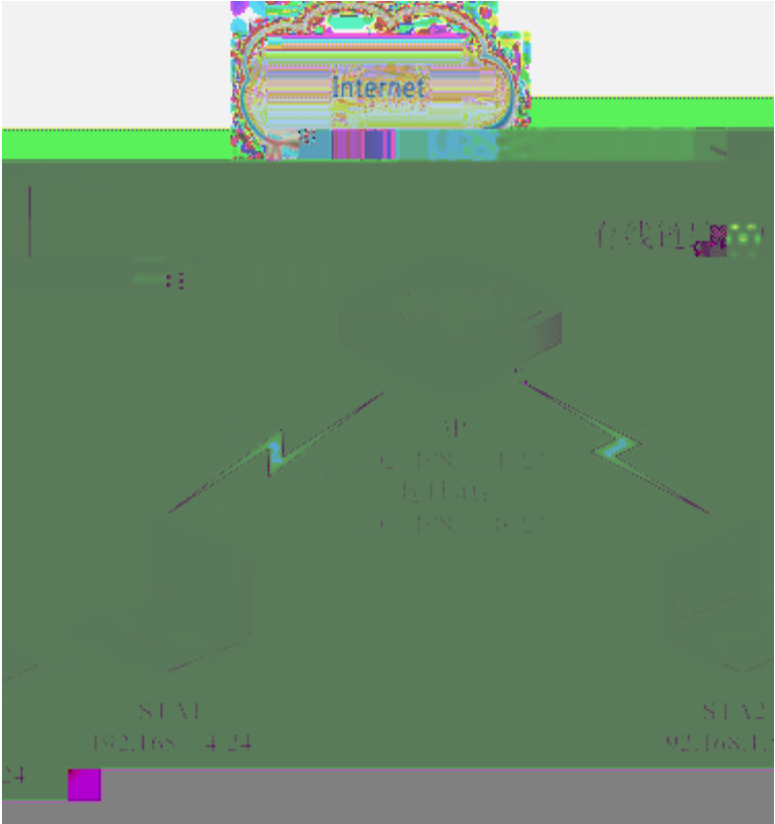

		&	
dhcp	ap		
		Wi-Fi	
		Wi-Fi	
		dhcp	ip

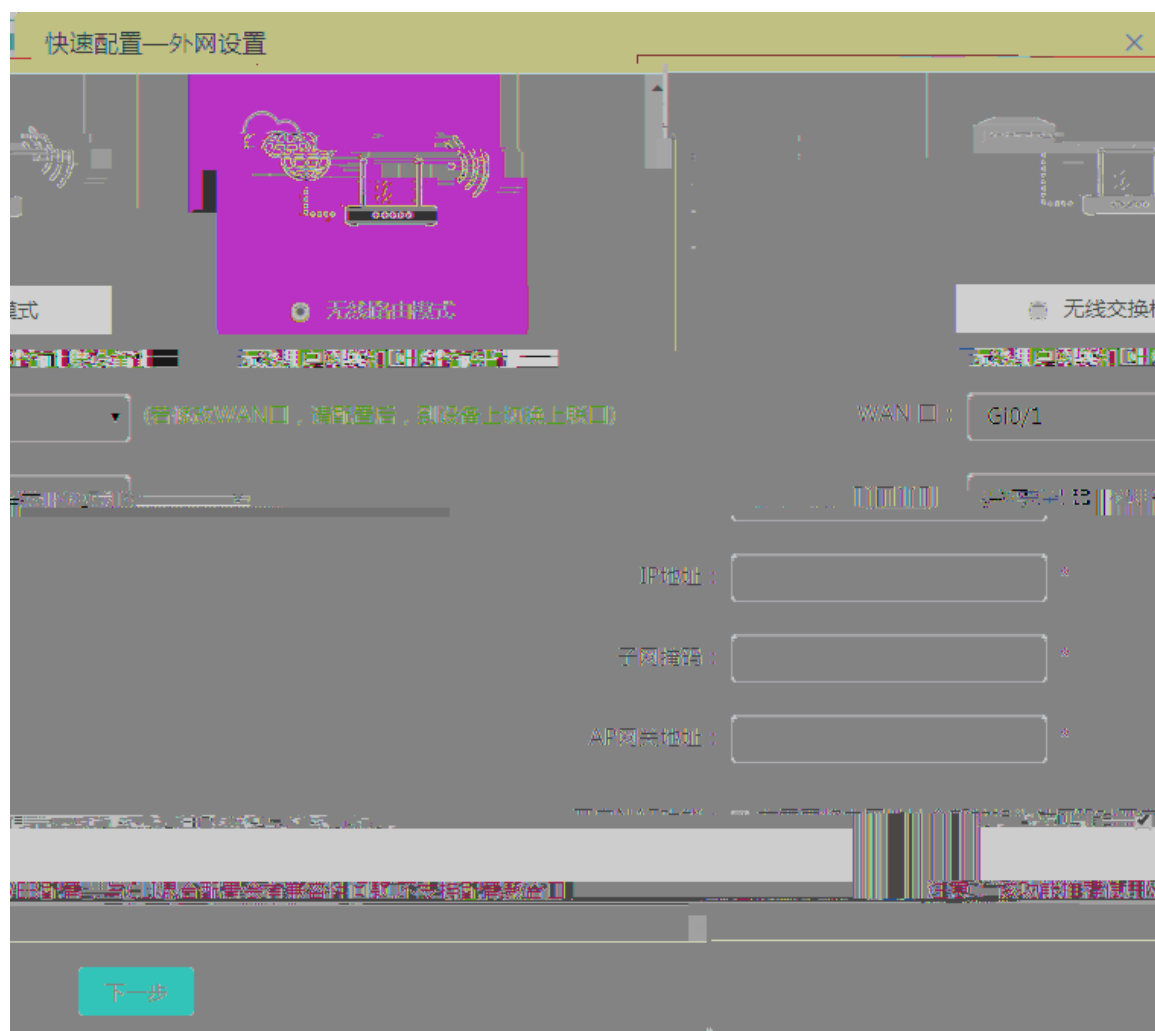

AP

IP(IP)

快速配置—外网设置

☐ 无线交换模式
 ☒ 无线路由模式

无线用户网段和DHCP在上联设备上 无线用户网段和DHCP在AP上

WAN口: (请选择WAN口, 请配置IP, 到设备上物理上联口)

联网类型:

IP地址:
 子网掩码:
 AP网关地址:

网络功能配置: 网络功能配置...
 功能推荐使用WEB配置, 与CLI混合配置会有兼容性问题, 不支持配置聚合口

PPPoE(ADSL)

快速配置—外网设置


☐ 无线交换模式
 ☒ 无线路由模式

无线用户网段和DHCP在上联设备上 无线用户网段和DHCP在AP上

WAN口: (请选择WAN口, 请配置IP, 到设备上物理上联口)

(The content of the form below the WAN port selection is obscured by a black box.)

DHCP(IP)

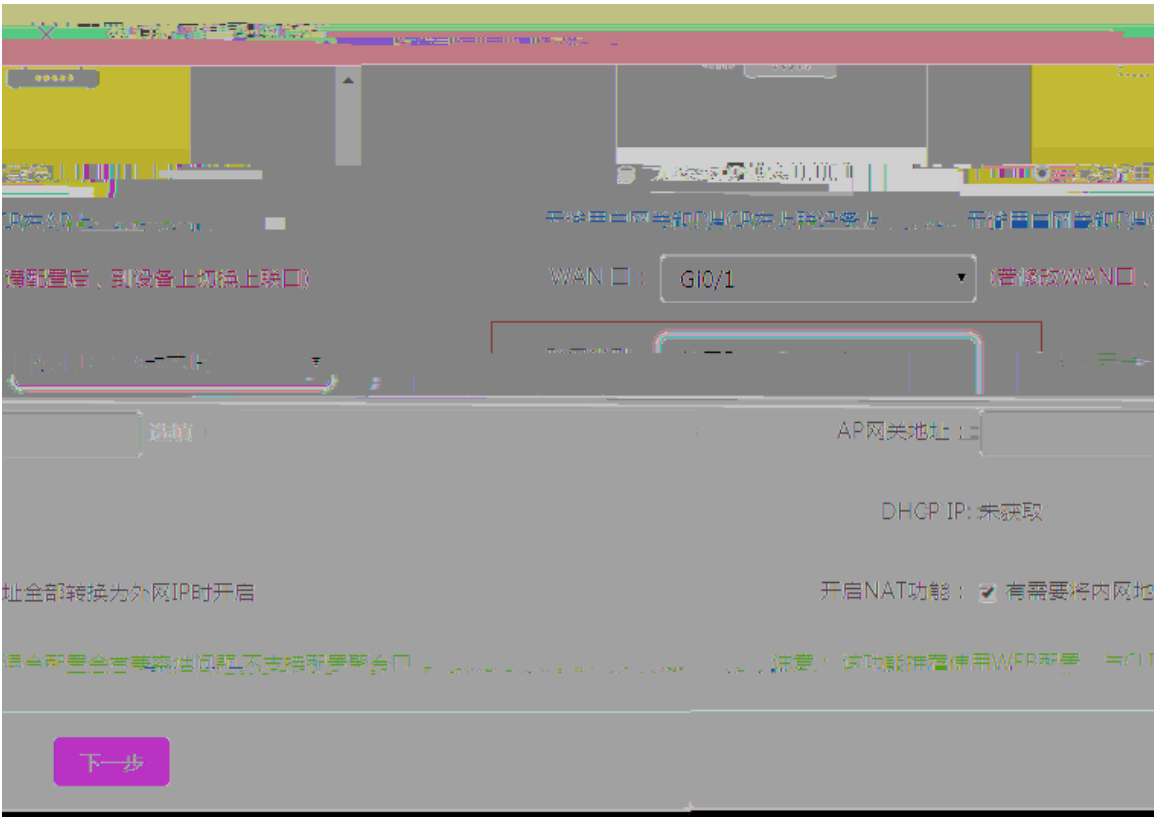

1-2 ap -ssid

快速配置—WiFi配置

WiFi名称：

Eweb_AAAA1

WiFi密码：

.....

显示密码

Wlan ID：

1

IP分配范围：

192.168.1

1

至

254

选择

选择

DHCP网段：

192.168.1.1

首选DNS：

114.114.114.114

备用DNS：

完成配置

上一步

The screenshot displays the configuration page for an AP's Eweb interface. The 'WIFI名称' (WIFI Name) is set to 'Eweb_AAAA1'. The 'WIFI密码' (WIFI Password) is shown as a series of dots. The '开启DHCP服务' (Enable DHCP Service) checkbox is checked, with a note 'DHCP服务最多能在本AP上(AP)'. The 'Wlan ID' is set to '1'. Under the 'IP分配范围' (IP Allocation Range) section, the 'IP分配范围' (IP Allocation Range) is '192.168.1' to '254'. The 'DHCP网关' (DHCP Gateway) is '192.168.1.1'. The '首选DNS' (Preferred DNS) is '114.114.114.114' with a '选填' (Optional) label. The '备用DNS' (Backup DNS) is empty with a '选填' (Optional) label. At the bottom, there are two buttons: '完成配置' (Finish Configuration) and '上一步' (Previous Step).

WIFI名称: Eweb_AAAA1

WIFI密码: [dots]

开启DHCP服务: ☒ DHCP服务最多能在本AP上(AP)

Wlan ID: 1

IP分配范围: 192.168.1 1 至 254

DHCP网关: 192.168.1.1


首选DNS: 114.114.114.114 选填

备用DNS: 选填

完成配置 上一步

4 dhcp

1-4 ap -dhcp

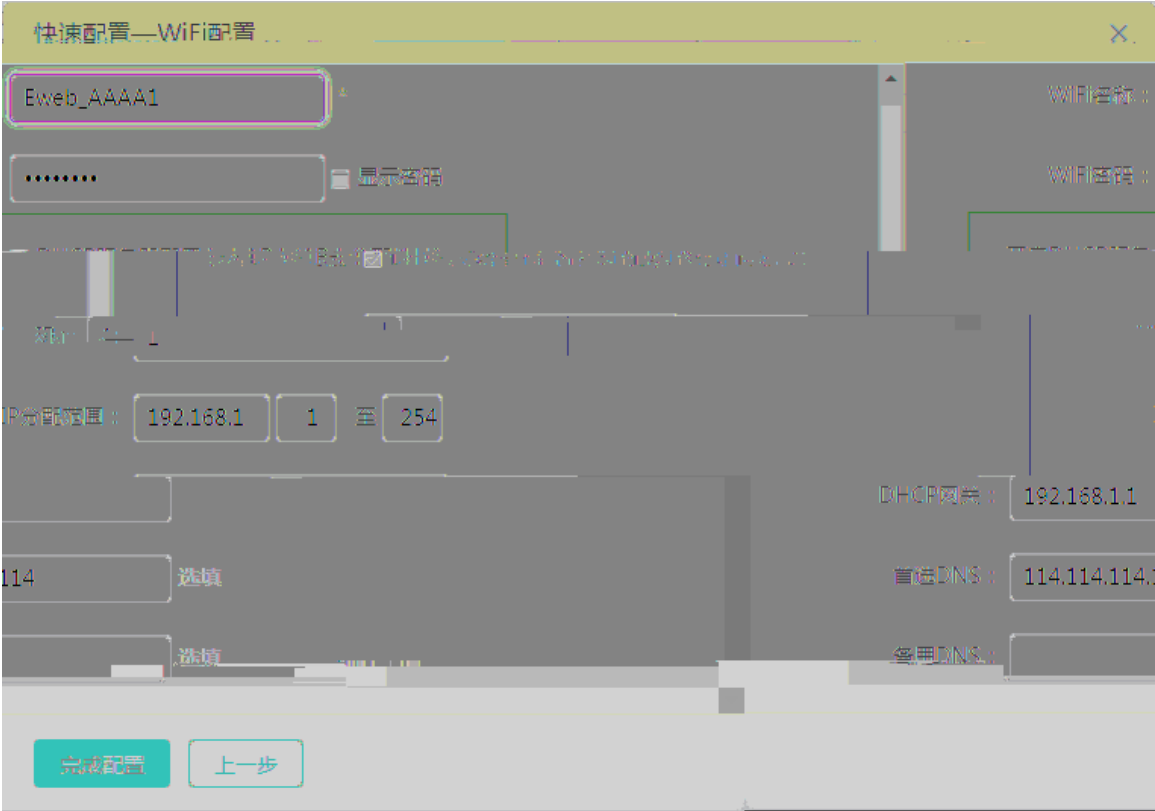

192.168.1.0/24

DNS 192.19Aj/>56.1.19Aj0b