

copyright © 2025

& # ,

<https://www.ruijie.com.cn>

<https://www.ruijie.com.cn/fw/>

7*24h <https://ocs.ruijie.com.cn>


7*24h 4008-111-000

—— <https://www.ruijie.com.cn/special/fw/tool/xryf/>

4008111000@ruijie.com.cn

doc@ruijie.com.cn

APP

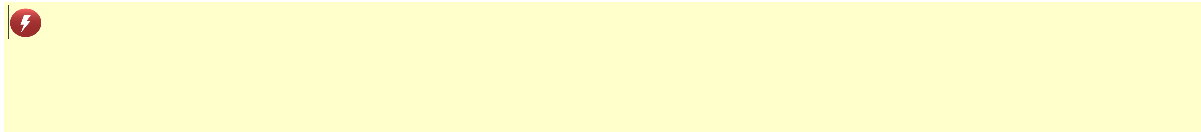

 >Ž/¼@ N±J ?· Ò 36« ¾,º?ú O > , Ò 3?ü!š2± ¥ 2± 2;~8*]2±L• „ LAô = • ... >



1		1
1.1		1
1.2		1
1.3		4
1.4		5
1.4.1		5
1.4.2		5
1.4.3		6
1.4.4		6
1.4.5		7
1.5		7
2		9
2.1		9
2.1.1		9
2.1.2		9
2.1.3		9
2.1.4		10
2.2		10
2.2.1		10
2.2.2		10

3.2		0
3.3		1
3.4		1
3.4.1 86		1
3.4.2		4
3.5		5
3.6		5
3.6.1		5
3.6.2		5
3.7		5
3.7.1		5
3.7.2		5
3.7.3		5
4		6
4.1		6

3.2

6.2.5		9
6.2.6		9
6.2.7		9
7		10
7.1		10
7.2		12
7.3 DC		15


RG-AP180-A(V3) 802.11ax
AP RG-AP180-A(V3)

RG-AP180-A(V3) 802.11ax 2.4G 575Mbps
5G 2.4Gbps 2.975Gbps
5 4 LAN 1 RG-
AP180-A(V3)

RG-AP180-A(V3)

RG-AP180-A(V3) 2 5 802.3af/at PoE
1 Micro USB Console 1 DC 1



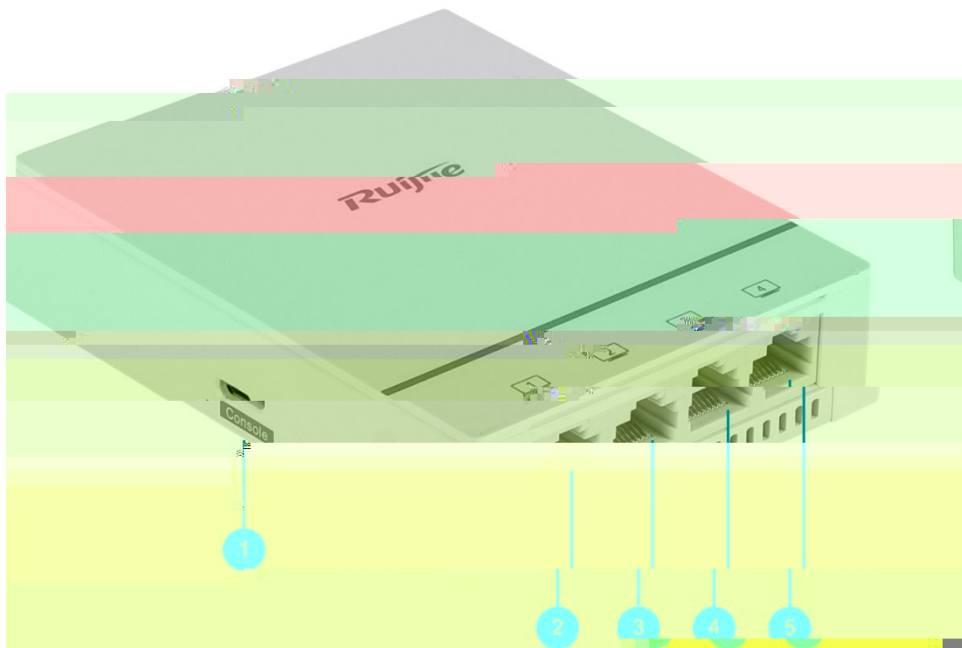

1	Console	
2~5	LAN	

× ×	86mm×116mm×24.1mm +18.9mm
	0.3kg
	86

--	--



PoE

802.3af

AP

	-10°C 45°C -40°C 70°C 3000~5000 220 1
	5%RH~95%RH 5%RH~95%RH
	IEC 60950-1 IEC 62368-1 GB 4943.1
EMC	EN301489 EN55032 EN55035



FIT AP FAT AP

		AP
		AP
		AP Link Down

3

1

	0.2	

	2	
	5	



18


24

/





()

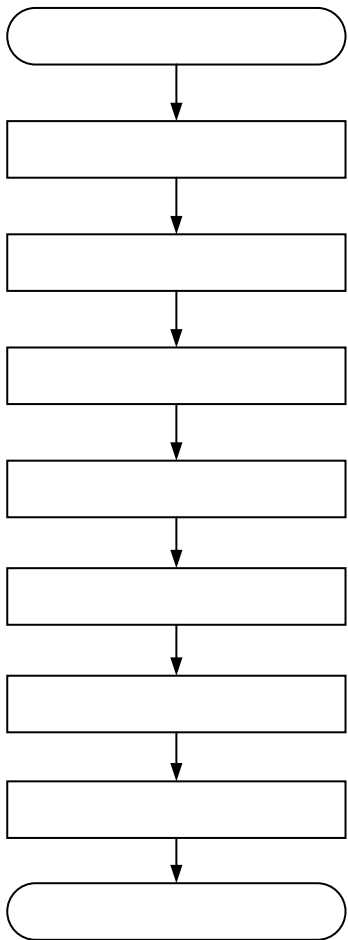

AP

	86	AP	JB/T 8593-2013	M4
10±1kgf•cm				

(1) 86

(2)

WAN/PoE

(3)

86



AP

AP

(2)

	AP	LAN/PoE	AP	7.1	
	Console	9600	8	1	AP

DC PoE AP

DC PoE AP

AP AC

PC AP PC PoE




AP	AP	AP
AP	AP	AC

PoE

PoE

802.11af

DC

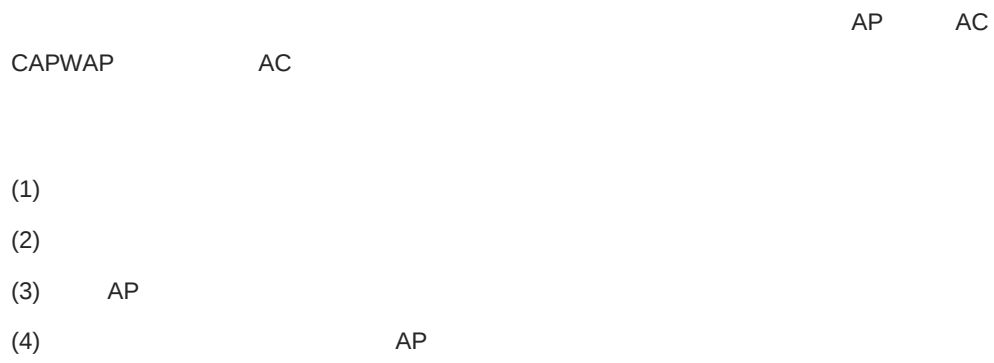

1000BASE-T/100BASE-TX/10BASE-T				
1000BASE-T/100BASE-TX/10BASE-T				MDI/MDIX
Crossover				
1000BASE-T	IEEE 802.3ab	100-ohm 5	5	UTP
STP	100			
1000BASE-T	4	4	1000BASE-T	

100BASE-TX/10BASE-T		10Mbps	100-ohm 3 4 5
100Mbps	100-ohm 5	100	100BASE-TX/10BASE-T


T T

4 5 7 8	Not Used	Not Used

100BASE-TX/10BASE-T





7-6

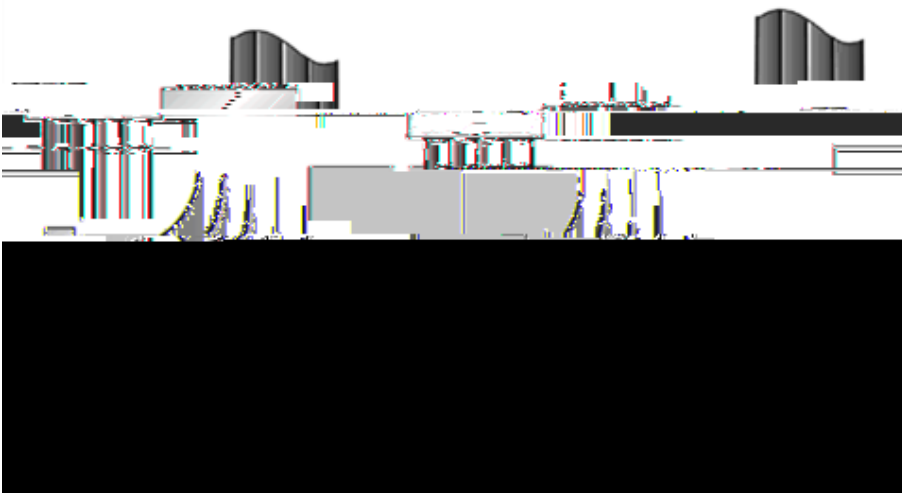

220V

-48V

7-7

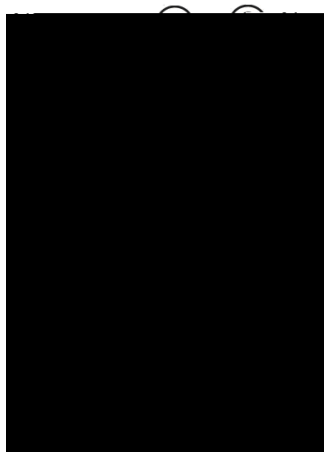

10	80~150
10~30	150~200
30	200~300

DC 12V 1A

2.1mm	5.5mm	10mm	

