

RG-CT7528

V1.2

2025-07-29

copyright © 2025

copyright © 2025



<https://www.ruijie.com.cn>

<https://www.ruijie.com.cn/fw/>

<https://wind.ruijie.com.cn/>

7*24h

<https://ocs.ruijie.com.cn>

7*24h

4008-111-000

<https://www.ruijie.com.cn/special/fw/tool/xryf/>

4008111000@ruijie.com.cn

doc@ruijie.com.cn



APP

1.











/

2.

1

RG-CT7528

--	--

(1)				LED	5
(2)	4	USB3.0	USB3.0	U	USB2.0
(3)		Type-C	U		
(4)					
(5)			CMOS		CMOS
(6)	4	USB2.0	USB2.0		
(7)				10M/100M/1000M	
(8)		VGA			
(9)		HDMI			
(10)		19V 7.11A			

1.3



1-2



	1 DC 1 3.5mm 1 10M/100M/1000M 1 Type-C (USB3.2 GEN2(10Gbps)) 4 USB3.0 (USB3.2 GEN2(10Gbps)) 4 USB2.0 1 VGA 2 HDMI
	RAINOS

Wi-Fi




Wi-Fi

	60W
	0°C 40°C -40°C 70°C 3000~50002201
	10%RH~90%RH 5%RH~90%RH
	0m~5000m
	1920×1080@60Hz VGA 4096×2160@60Hz HDMI
VESA	
	BIOS


2

2.1

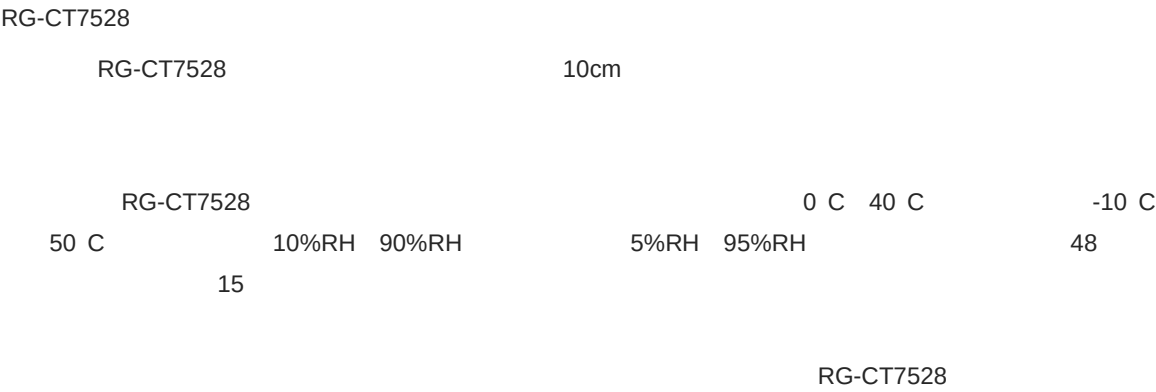


2.2

2-1




3-2

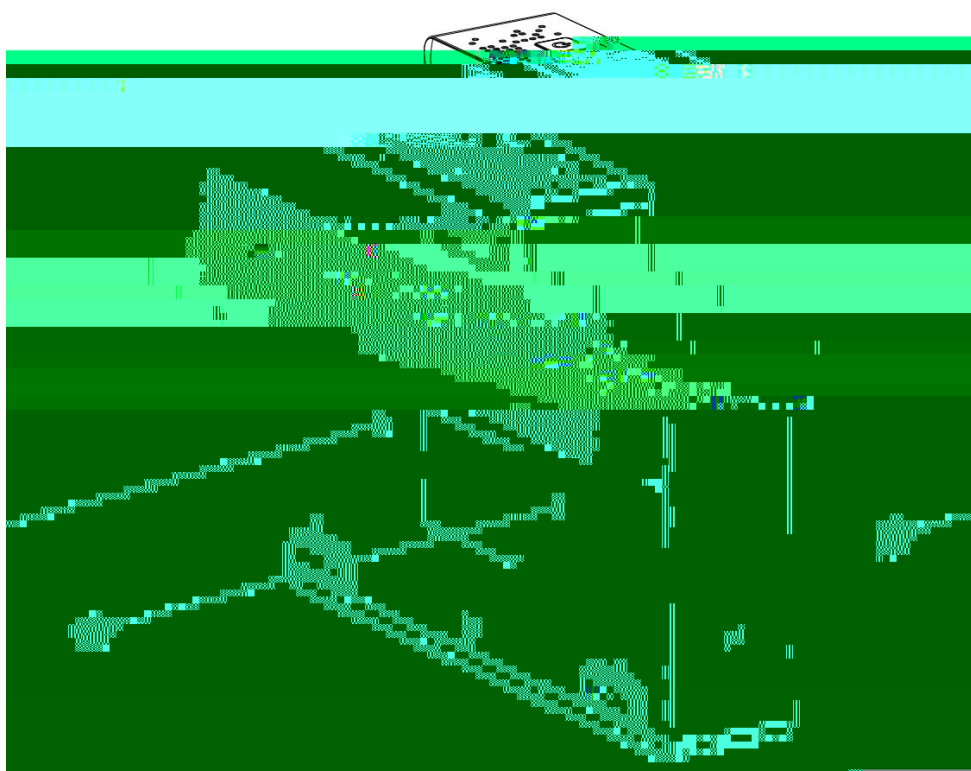


(3)

3-3

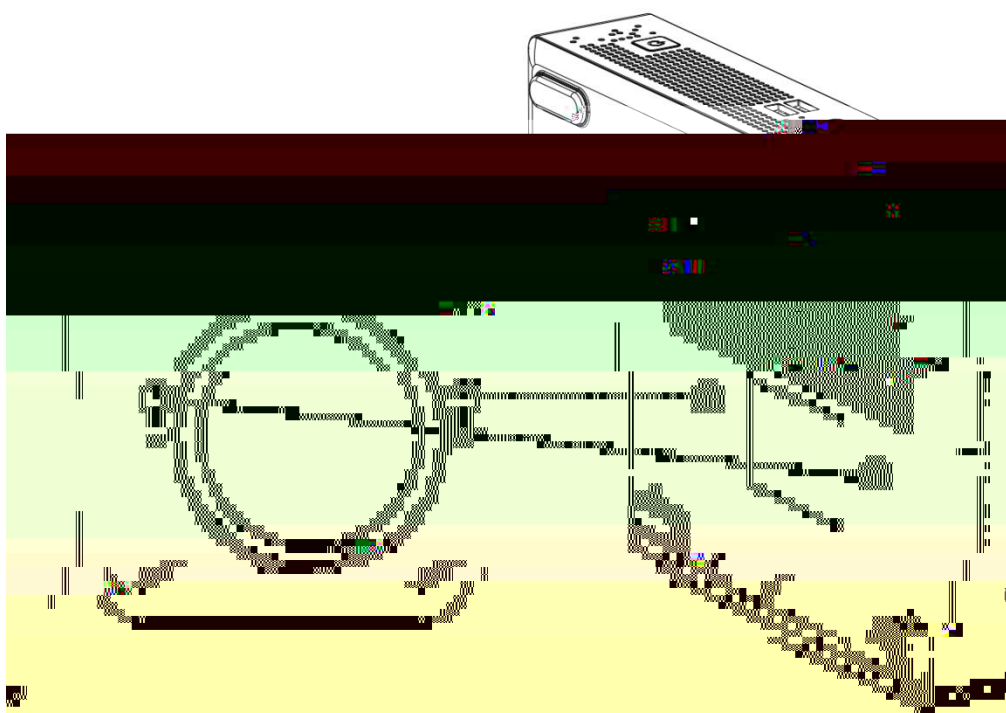


(4)

3-4

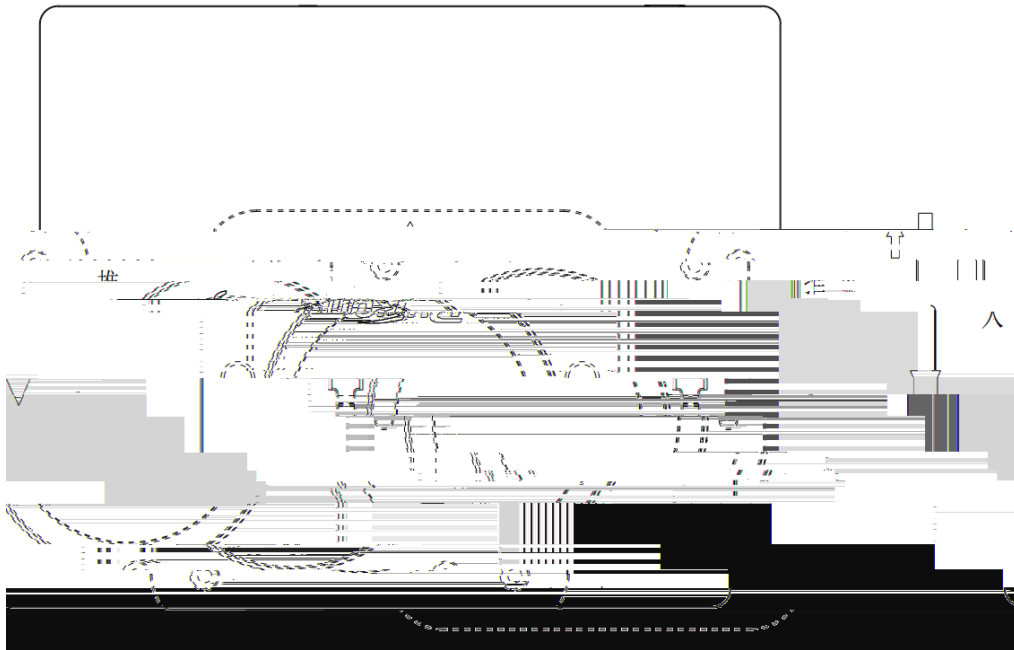

3.2

3-5

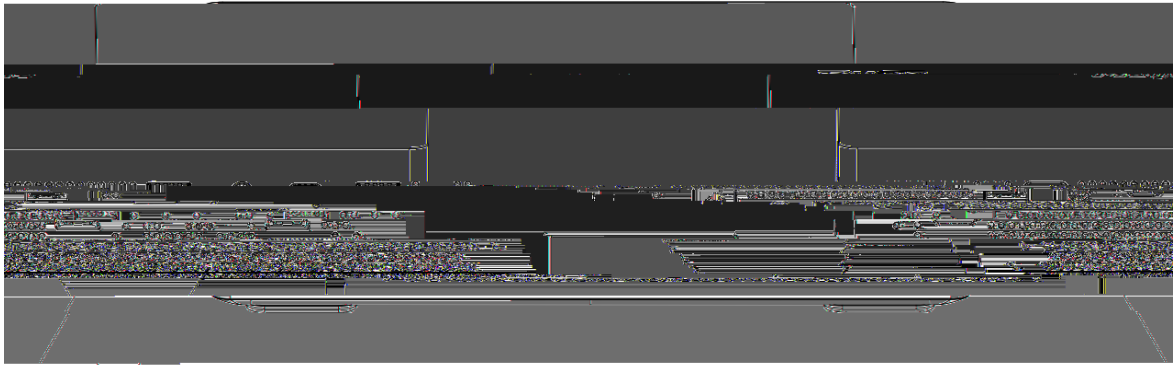

3-6


3-7

3.3

VGA HDMI

3.4

3-9

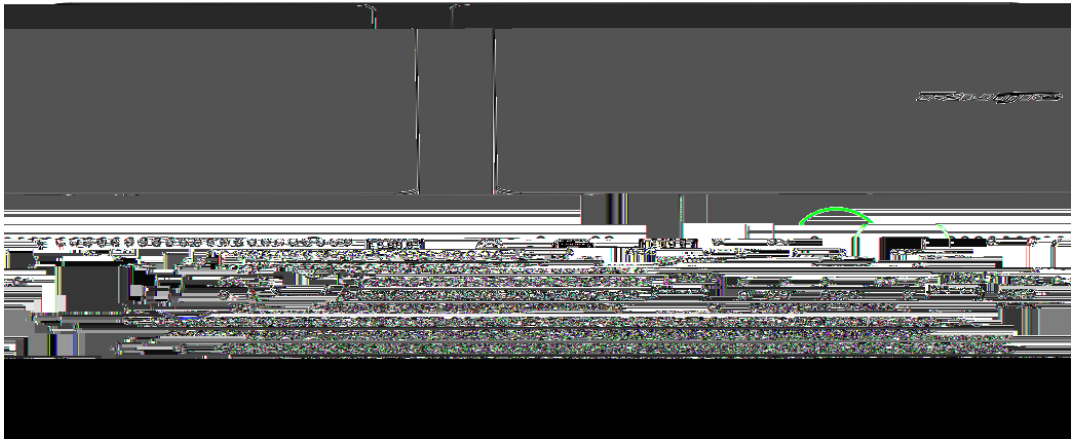

4

4.1

0 ~40

4.2

/

180V~240V

I

USB

Type-C

USB

15W

USB

4.3

4.4

4.5

4.6

9

24

5

120/240V 20A

SJ/T11364-2006

5-1

	(Pb)	(Hg)	(Cd)	Cr(VI)	(PBB)	(PBDE)

1	SJ/T 11364			GB/T26572		
				GB/T26572		
2	1					
3	2					