

copyright © 2025





<https://www.ruijie.com.cn>

5.2


4		2		
5		4		
6		1		
7	M4X7	8		
8		1		
9		1		

	RG-IF2920-24GT4MS
	CPU 1.2G
	/
	64MB
	DDR3 512MB
	B
	2500Base-X 1000Base-X 100Base-FX
	AC 100-240V~ 90-264V~ 50/60Hz 0.6A
	≤

	≤15.6W

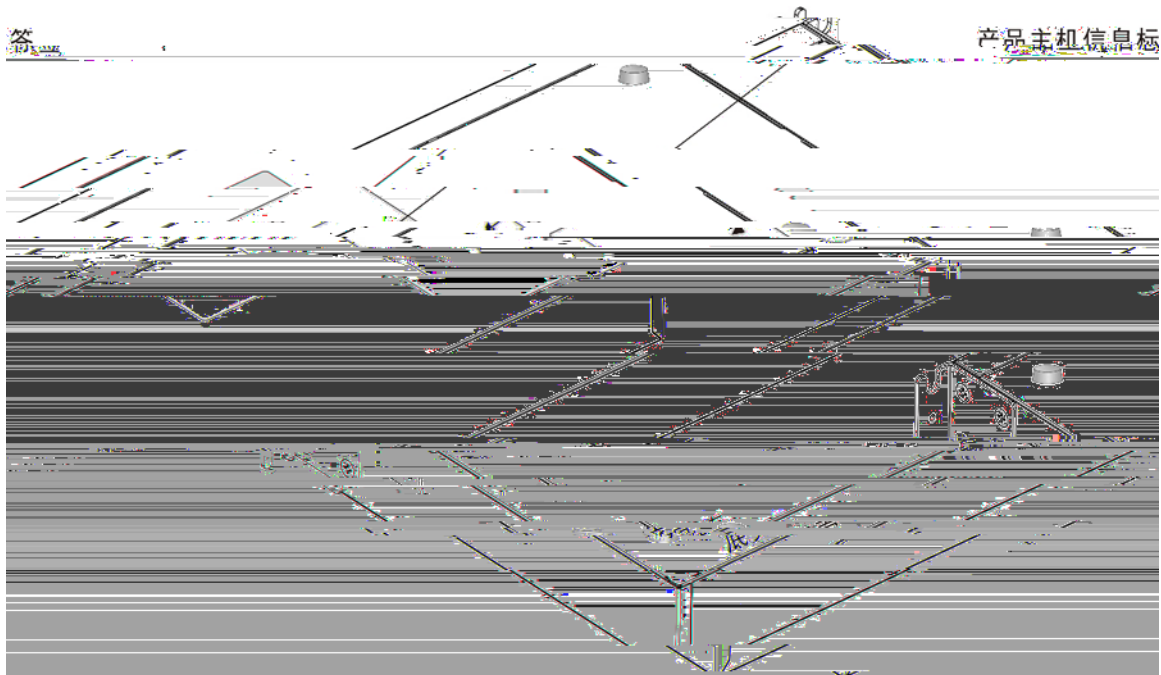

- | | |
|---------------------|-------|
| 1 | 5 |
| 2 USB | 6 SFP |
| 3 Console | 7 SFP |
| 4 10/100/1000Base-T | |

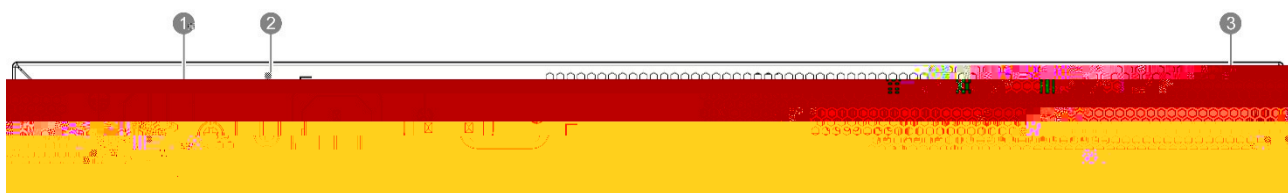

- | | |
|---|---|
| 1 | 3 |
| 2 | |

RG-IF2920-24GT4MS

AC

100-240V~;50/60Hz

90-264V~;47~63Hz

50/60Hz

0.6A

10A

RG-IF2920-24GT4MS

10cm

3



1U 44.45mm

	Status		
			1) 2)

10/100/1000M	1~24		Link
			10M/100M/1000M Link Up
SFP	MS1~MS4		Link
			Link Up

	RG-IF2920-48GT4MS	
	CPU	1.2G
	/	
	64MB	
	DDR3 512MB	
	B	

	0 to 45℃ 0-1800m
	1800~5000m 100m 0.6
	-40℃ to 70℃
	10% 90% RH
	5% ~ 95% RH
	0~5000m
	GB/T 9254.1
	GB 4943.1
	440mm x 260mm x 44mm
	1RU
	2.8 kg

RG-IF2920-48GT4MS
10/100/1000Base-T

1 RJ45 Console 1 USB 48 RJ45
4 MS

Y (C P I A E R) (S) E

RG-IF2920-48GT4MS

AC

100-240V~;50/60Hz

90-264V~;47~63Hz

50/60Hz



1.5A

10A

RG-IF2920-48GT4MS

10cm

3

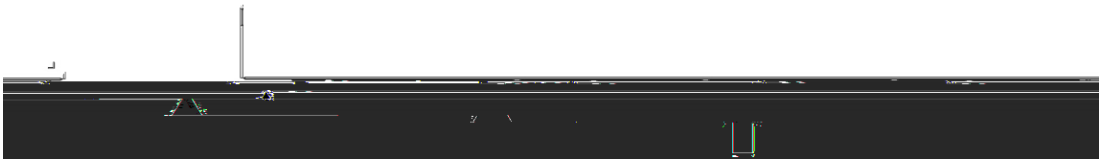

	Status		
			1) 2)
10/100/1000M	1~48		Link

			10M/100M/1000M Link Up
SFP	MS1~MS4		Link
			Link Up

RG-IF2920

	0~5000m
	GB/T 9254.1
	GB 4943.1
	440mm x 220mm x 44mm
	1RU
	2.9 kg


RG-IF2920-24GT4MS-P
10/100/1000Base-T

1 RJ45
4 MS

Console

1 USB

24 RJ45

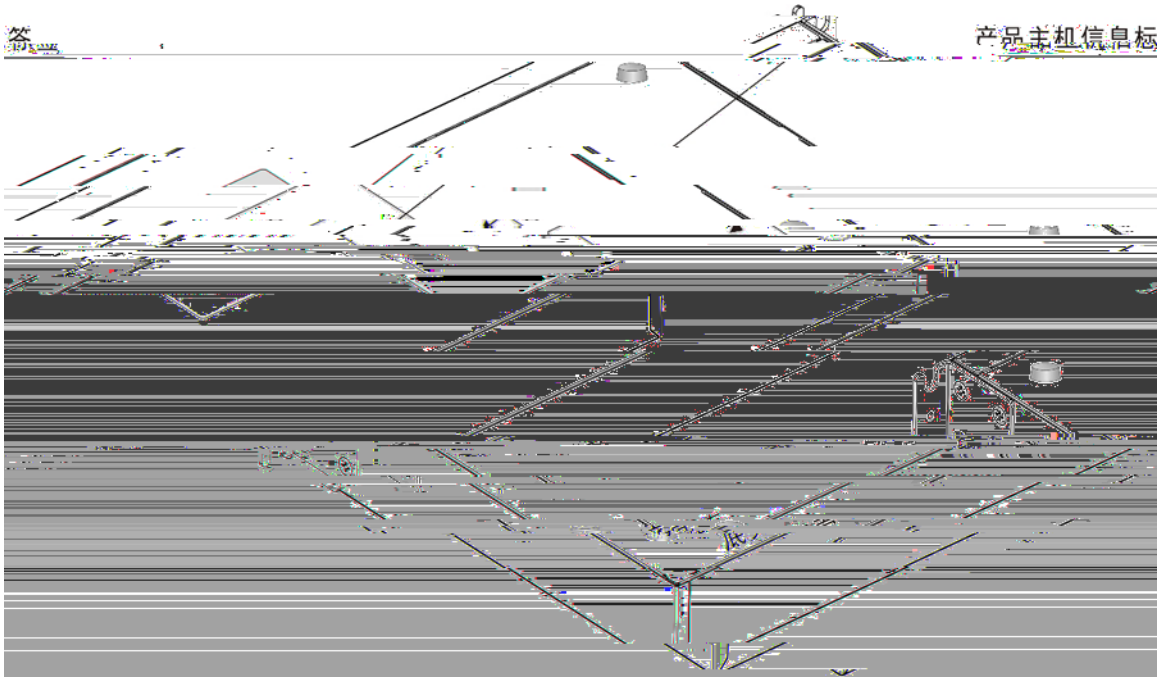

- | | |
|------------|---------------------|
| 1 | 6 10/100/1000Base-T |
| 2 LED Mode | 7 |
| 3 LED Mode | 8 SFP |
| 4 USB | 9 SFP |
| 5 Console | |

	LED Mode	PoE	2
---	----------	-----	---



RG-

RG-IF2920



18

24

/

RG-IF2920

A1 A2

A1

A2

A3

B1

B2

IDC

I

TN

PE



C


1Ω


1




RG-IF2920



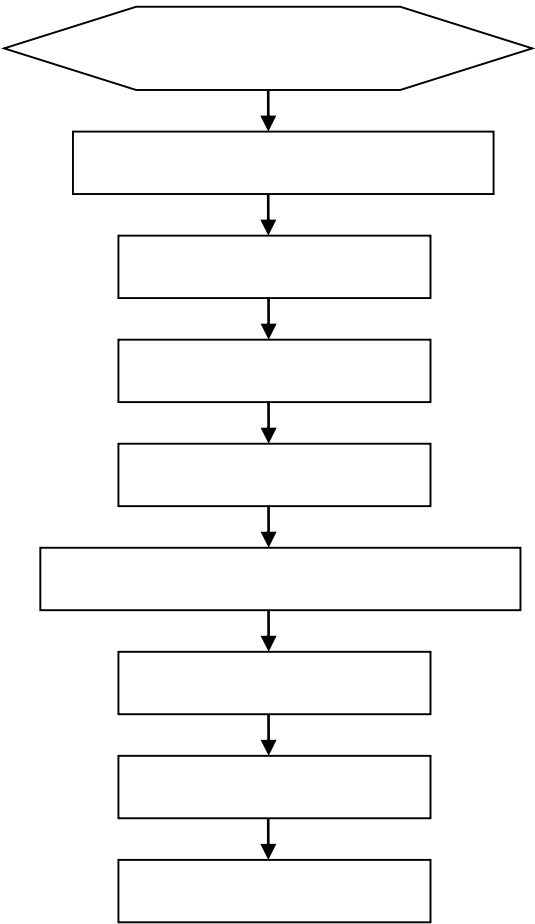

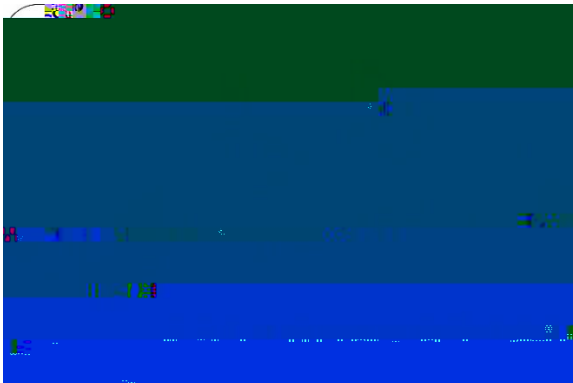


3-6

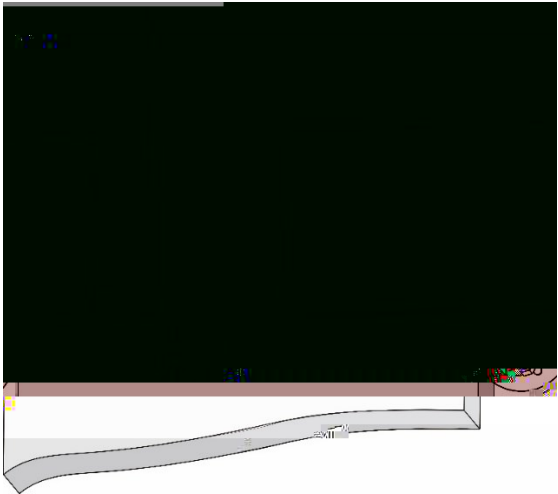

1Ω



0.1




“ ”

(1) RJ45
RJ45


(2) ,

(3) RJ45


- (1)
- (2)
- (3)




(2)	[Serial]	Serial line	Speed
-----	----------	-------------	-------

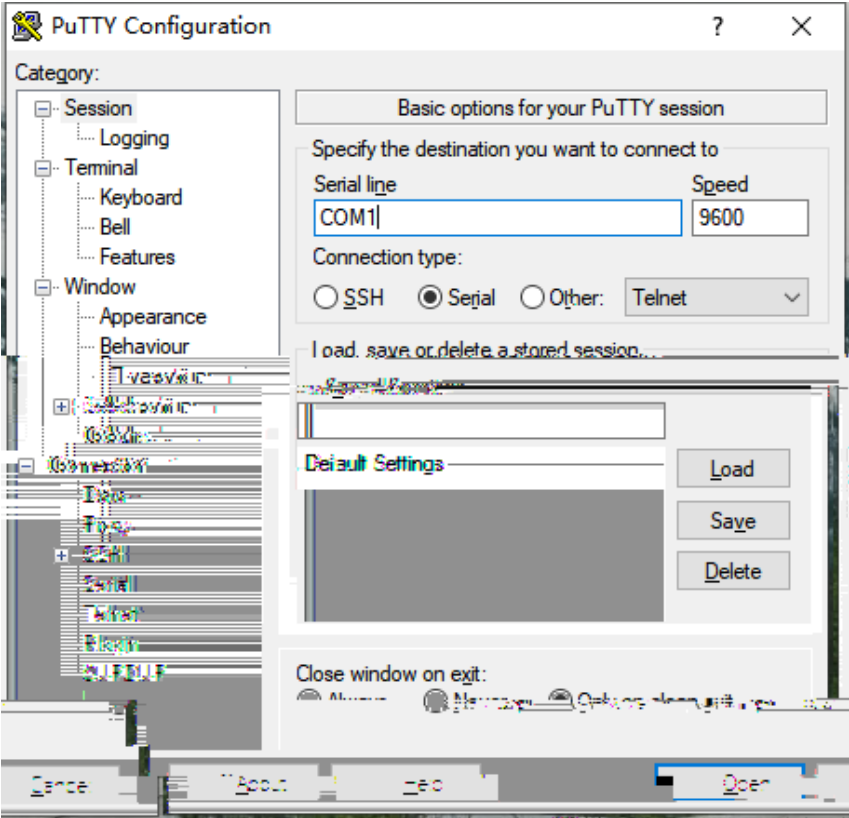

(3) <Serial> 4-5 9600

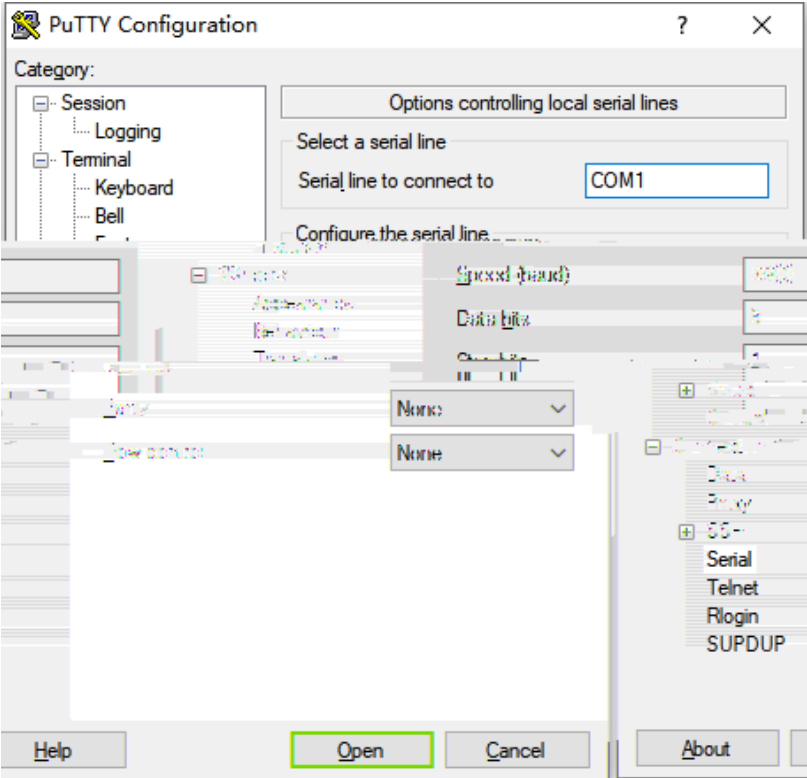

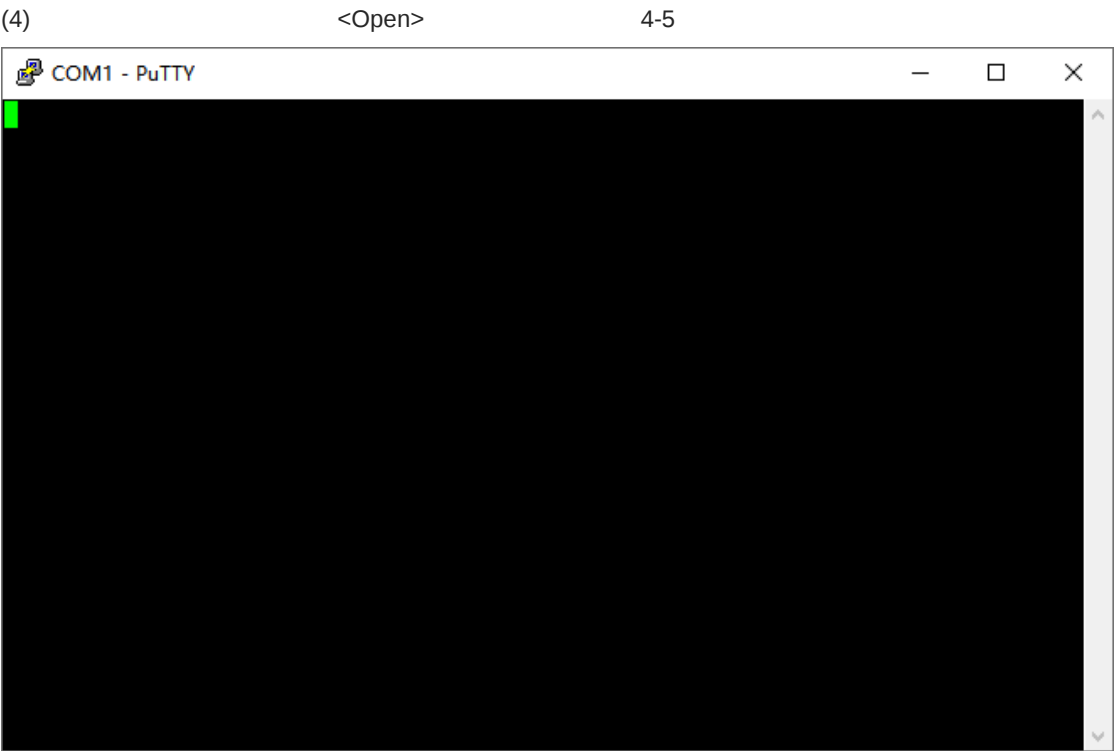

PC

Status

Status

Status




Status

Status



RG-IF2920



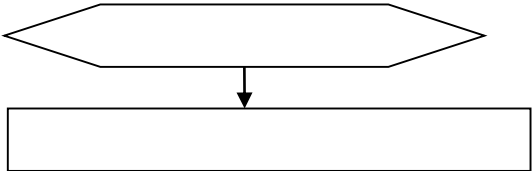


Status

(1)

		SFP		Mini-GBIC		SFP		Mini-	
GBIC-GT		/2.5G SFP							
	(nm)		DDM (Yes/No)	(dBm)		(dBm)			
				min	max	min	max		
MINI-GBIC-SX-MM850	850		No	-9.5	-3	-17	0		
MINI-GBIC-LX-SM1310	1310		No	-9.5	-3	-20	-3		
GE-SFP-SX	850		No	-9.5	-3				

GE-eSFP-LX-SM1310	1310		Yes	-9.5	-3	-20	-3
GE-SFP-LX-SM1310	1310		No	-9.5	-3	-20	-3
GE-SFP-LX20-SM1310-BIDI	1310TX/1550R X		Yes	-9	-3	-20	-3
GE-SFP-LX20-SM1550-BIDI	1550TX/1310R X		Yes	-9	-3	-20	-3
GE-SFP-LH40-SM1310-BIDI	1310TX/1550R X		Yes	-5	0	-24	-1
GE-SFP-LH40-SM1550-BIDI	1550TX/1310R X		Yes	-5	0	-24	-1
MINI-GBIC-LH40-SM1310	1310		Yes	-2	3	-22	-3
MINI-GBIC-ZX50-SM1550	1550		Yes	-5	0	-22	-3
MINI-GBIC-ZX80-SM1550	1550		Yes	0	4.7	-22	-3
MINI-GBIC-ZX100-SM1550	1550		Yes	0	5	-30	-9

GE-SFP-LH40-SM1310-BIDI	LC		9/125	40km
GE-SFP-LH40-SM1550-BIDI	LC		9/125	40km

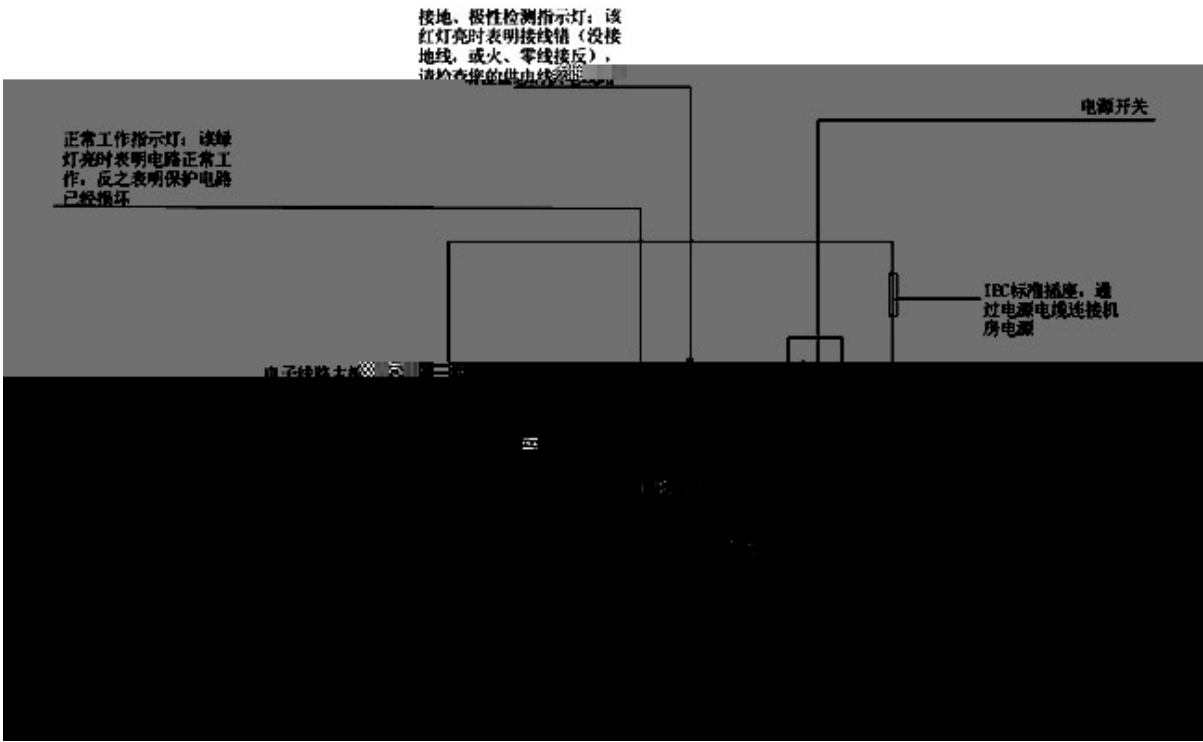

PE



PE


PE



10/100M RJ-45

“IN” “OUT”

220V -48V



3.7km

600mm