

copyright © 2024

[http](#)

2.2.4		15
2.2.5		15
2.2.6		16
2.2.7		16
2.2.8 EMC		16
2.3		17
2.4		17
3		17
3.1		18
3.2		18
3.3		18
3.3.1	19	19
3.3.2		19
3.4		19
3.5		22
3.6		22
3.7		23
3.8		23
4		23
4.1		23
4.2		27
4.2.1		27
4.2.2		27
5		27
5.1		27
5.1.1		27
5.1.2 CLI		28
5.2		28
5.2.1		28
5.2.2		28
5.2.3		28

5.2.4		28
6		29
6.1		29

RG-S5315-E

RG-S5315-E

QOS

RG-S5315-E



CR2032

USB

Universal Serial BUS


USB

Console

RS-232

RJ45

--	--	--	--

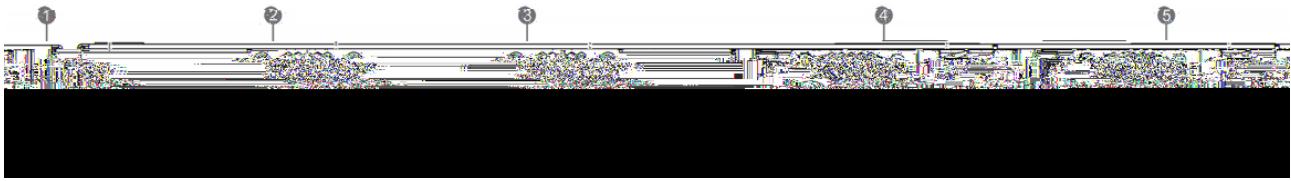



1		
2	1	
3	2	
4	1	
5	2	

	RG- S5315-24MG6XS-UP-E
	1.0GHz
	16MB
	256MB
	1GB
	B/C/D 
	2
	RG-PA600I-P-F AC • 100V~240V AC 50Hz~60Hz • 90V~264V AC 47Hz~63Hz • 8A RG-PA600I-P-F HVDC • 240V DC • 192V~288V DC • 4A

RG-PD600I-P-F	DC	
•	-48V~-60V DC	
•	-38V~-75V DC	
•	20A	
RG-PA1000I-P-F	AC	1

	PoE	470W	RG-PA1000I-P-F		
	PoE	800W	RG-PA600I-P-F		
	PoE	940W	RG-PD600I-P-F		
	PoE	940W	RG-PA1000I-P-F		
	PoE	1600W			
					
	PoE	POE			
	0℃ ~ 45℃ 0-1800m				
	1800~5000m		220m	1	
	-40℃ ~ 70℃				
	10% ~ 90% RH				
	5% ~ 95% RH				
	0~5000m				
	GB/T 9254.1				
	GB 4943.1				
× ×	442.0mm x 420.0mm x 43.6mm				
	4.1kg				



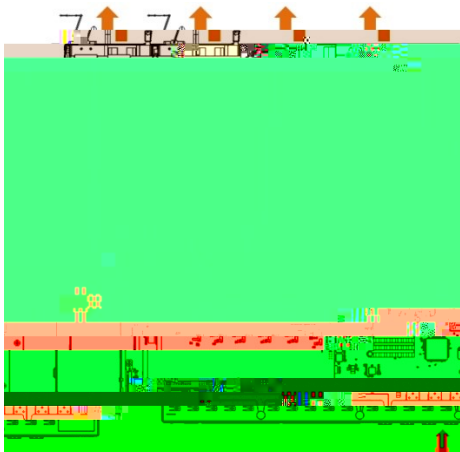

	Status		
		3HZ	3HZ
		10HZ	
			1 2
	PWR1/PWR2		
			AC
LED Mode	LED Mode		
			PoE
SFP Plus	25F-30F		Link Up
			10G/2.5G/1G Link Up
			10G/2.5G/1G
100/1000/2500 Base-T	1-24		Link Up

		2500M/1000M/100M Link Up
		2500M/1000M/100M

PoE

1-24



1

1+1

2

POE

2

470W

2

1



“ ”	
I2C	I2C
	POE 470W 1+1
	1+1

		RG-PA600I-P-F
		RG-PA600I-P-F
		RG-PA600I-P-F

RG-S5315-24MG6XS

	AC	100V~130V AC	50Hz~60Hz	200V~240V AC	50Hz~60Hz
	HVDC	240VDC			
	AC	90V~143V AC	47Hz~63Hz	180V~264V AC	47Hz~63Hz
	HVDC	192VDC~288VDC			
	12A MAX	100Vac			
	8A MAX	200Vac			
	56V				
	17.86A	176-290VAC	190-290VDC		
	16.61A	90-176VAC			

1



/



18

24

10cm

/


0 °C-45 °C	10%-90%





RG-S5315-E



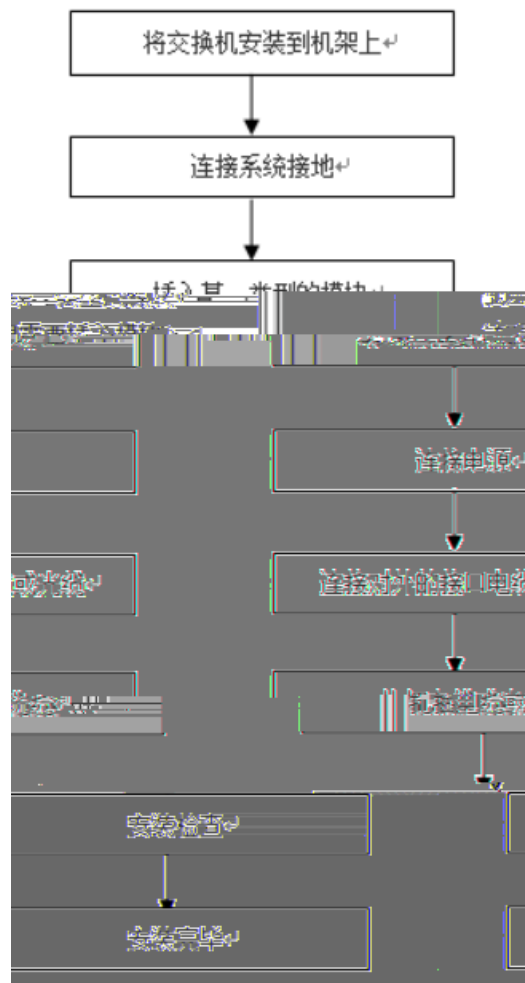



RG-S5315-E

X

1) RJ45

2) ,

3) RJ45

1)

2)


3)



10

PC

Console

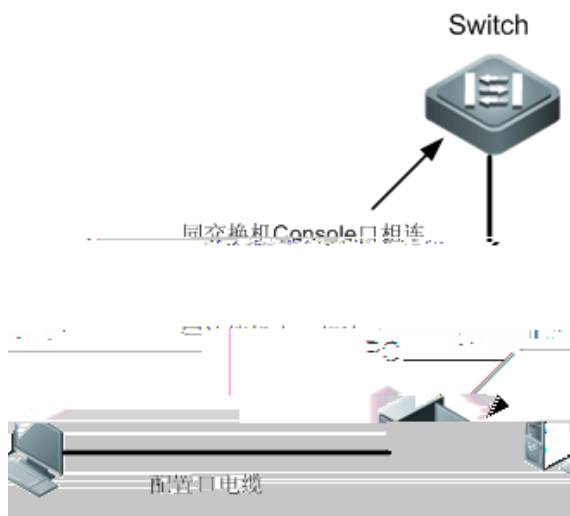

Console

DB-9
R-J45

PC
Console

PC PC
SecureCRT

Windows3.1 Terminal Windows 95/98/NT/2000/XP

9600

8

1


1

" " " " " "


4-2



2 “ ” 4-3

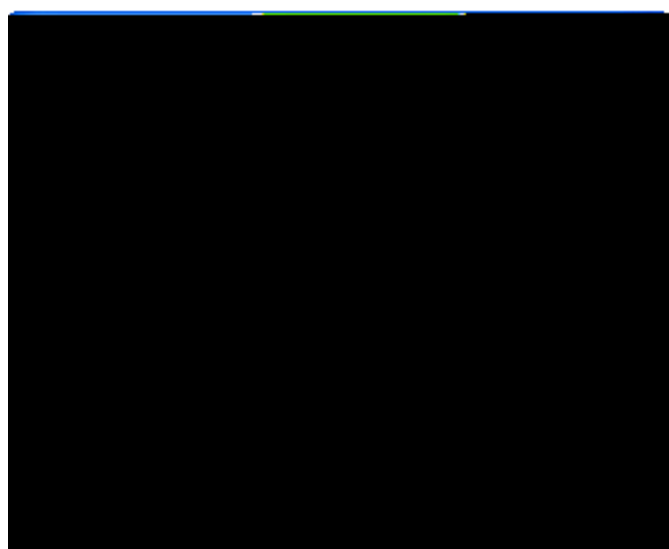

3 < > 4-4

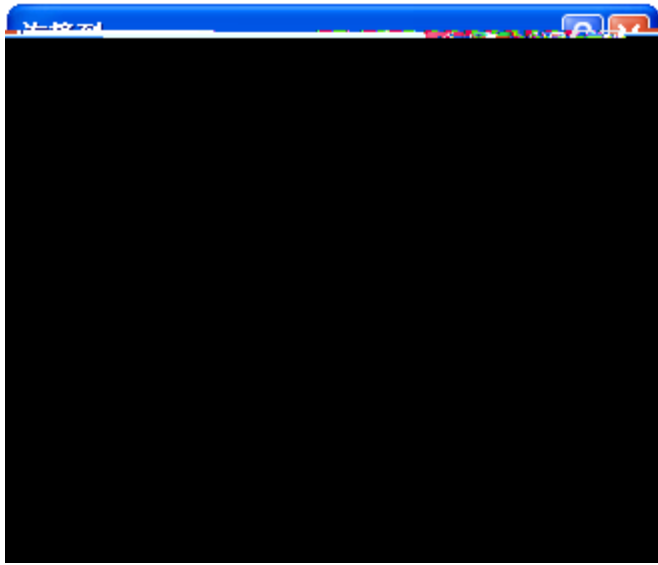

4

< >

4-5

9600

8


1



5

< >

4-6

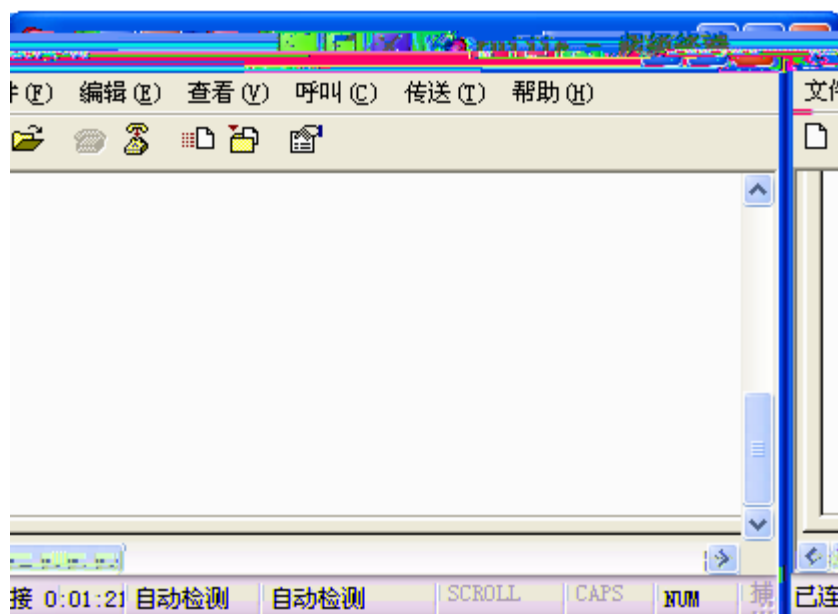

PC

Status

Status

Status


PWR1/PWR2

PWR1/PWR2



Status

Status

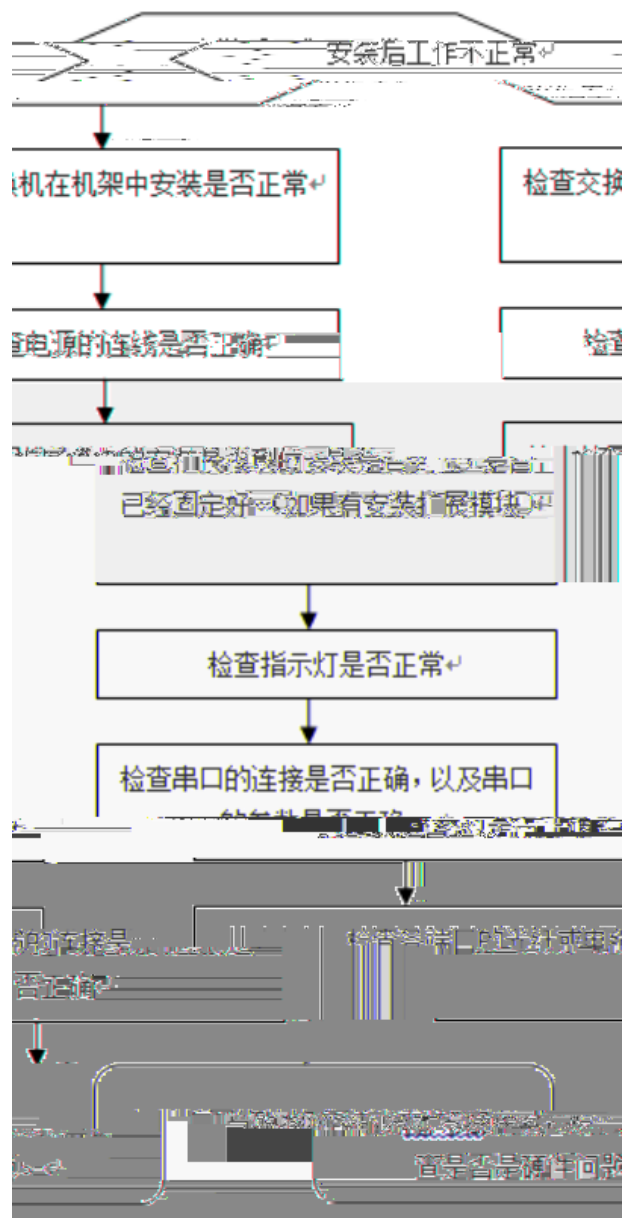

Status

1
2
3
4

1
2
3
4

link up

1

2
3
4

1310nm

1550nm

100BASE-TX

Mini-GBIC-GT
()

SFP
SFP

SFP

Mini-GBIC

SFP —

	(nm)		DDM (Yes/No)	(dBm)		(dBm)	
				min	max	min	

GE-SFP-SX-SM1310-BIDI	1310TX/1550RX	No
-----------------------	---------------	----

GE-SFP-LH40-SM1310-BIDI	LC		9/125	40km
GE-SFP-LH40-SM1550-BIDI	LC		9/125	40km
MINI-GBIC-ZX50-SM1550	LC		9/125	50km
MINI-GBIC-ZX80-SM1550	LC		9/125	80km
MINI-GBIC-ZX100-SM1550	LC		9/125	100km
GE-SFP-SX	LC		62.5/125	275m
			50/125	550m
GE-SFP-				

	(nm)	
--	------	--

SFP+

SFP+

()

	(nm)	DDM (Yes/No)		dbm		dbm	

XG-SFP-LR-SM1310	LC		9/125	N/A	10km
XG-SFP-ER-SM1550	LC		9/125	N/A	40km
XG-SFP-ZR-SM1550	LC		9/125	N/A	80km

E



PE

PE

1

2

3

4

5

OUT

IN



100M

RJ-45

“IN”

“OUT”

5

7

7

10

10

SFP PLUS


5

25

20

10

F-1

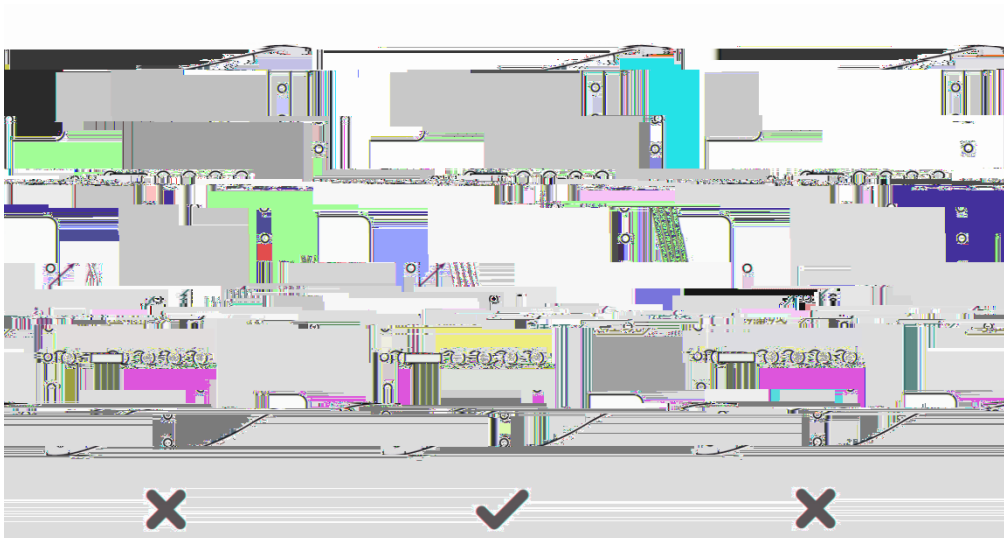


30mm

F-2



F-3

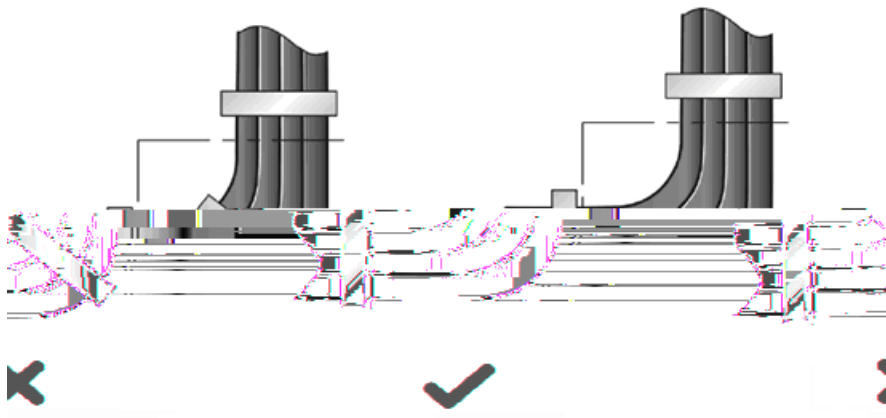

220V

-48V

F-4

F-1

600mm

 $\dot{\mu} y^a \acute{a} 9^z \ddot{Y} \hat{e} \bullet \hat{e}] F$