

RG-eLog


RG-eLog	2
	3
	3
1 CentOS 4.6	4
1.1 CentOS 4.6	4
1.2 CentOS 4.6	4
2 CentOS 5.5	32
2.1 CentOS 5.5	32
2.2 CentOS 5.5	32
3 RG-eLog	57
3.1 elog.tar.gz CentOS	57
3.1.1	57
3.1.2 CentOS FTP	58
3.2 CentOS RG-eLog	62
3.3 CentOS RG-eLog	68
3.4 CentOS RG-eLog	69
3.5 CentOS tcpdump	69
3.6 CentOS lftp	70
4 RG-eLog	72
4.1	72
4.2	76
4.2.1 ./npeserver	76
4.2.2 WEB	77
4.2.3	77
4.2.4	77
4.2.5 SAM	77
4.2.6	77

RG-eLog

RG-eLog V1.2 NPE NAT RG-WALL
 URL , RG-ACE HTTP , RG-EG NAT URL BBS
 IM MAIL . 82

RG-eLog 1

RG-eLog

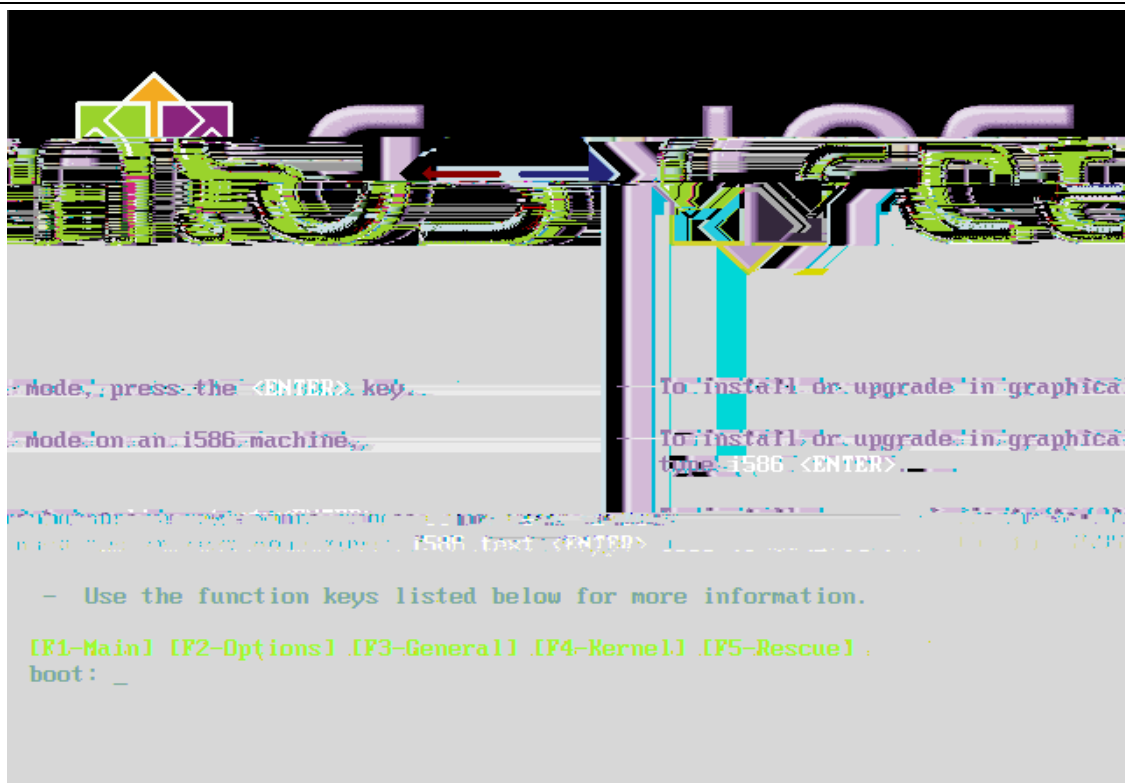

1-1


2. SATA linux all-generic-ide irqpoll
- 1.2

Welcome to CentOS-4 i386

<Tab> between elements ; <Space> selects ; <F12> next screen ; <Tab>/<Alt-Tab>


1-2

3.

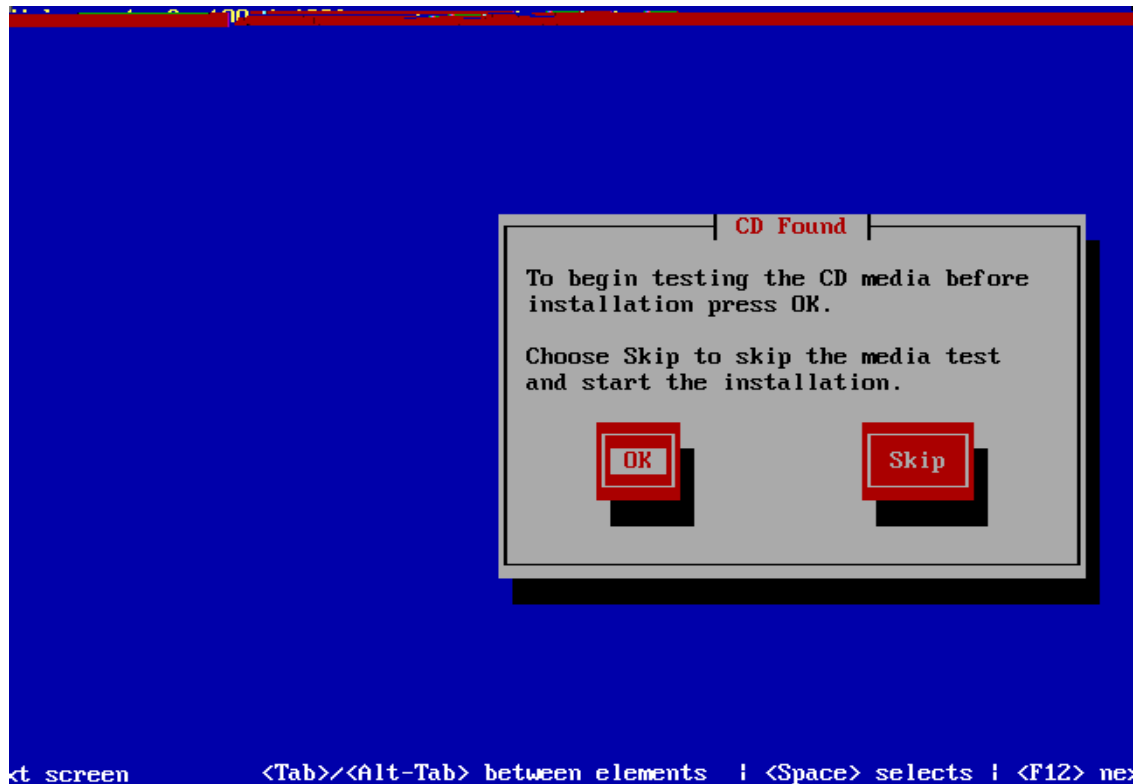

1-3


4. TAB Skip

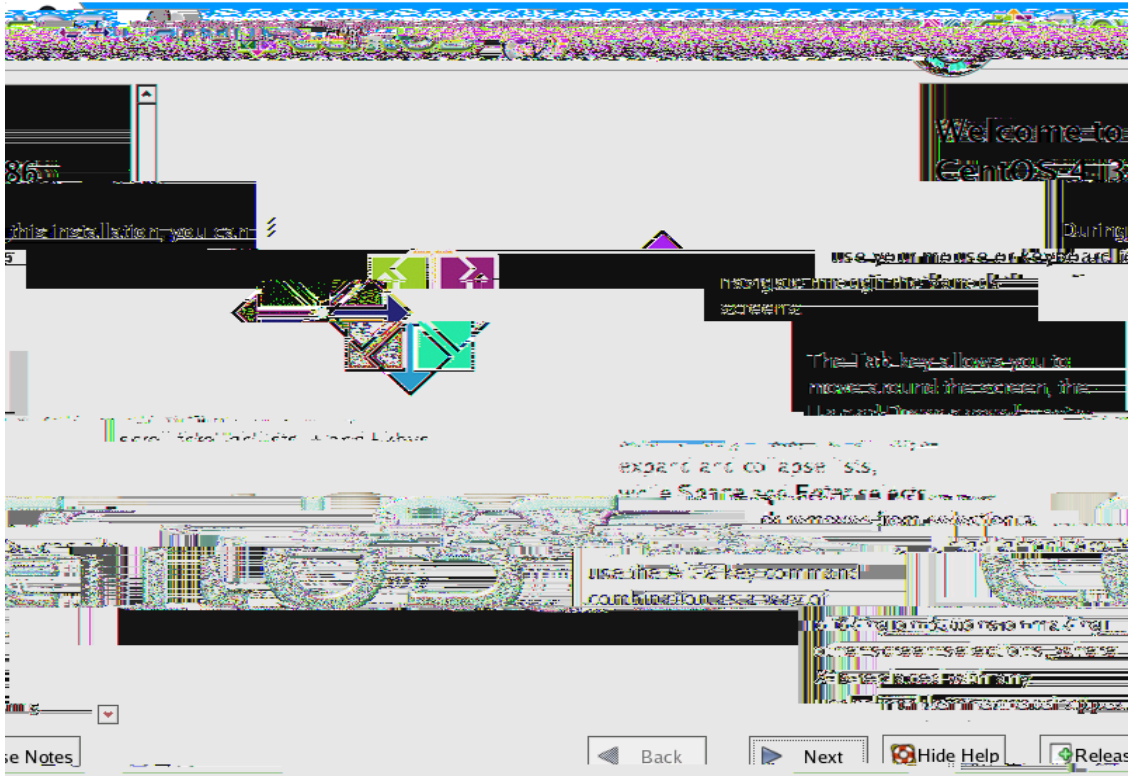

1-4

5. English 1.5

English

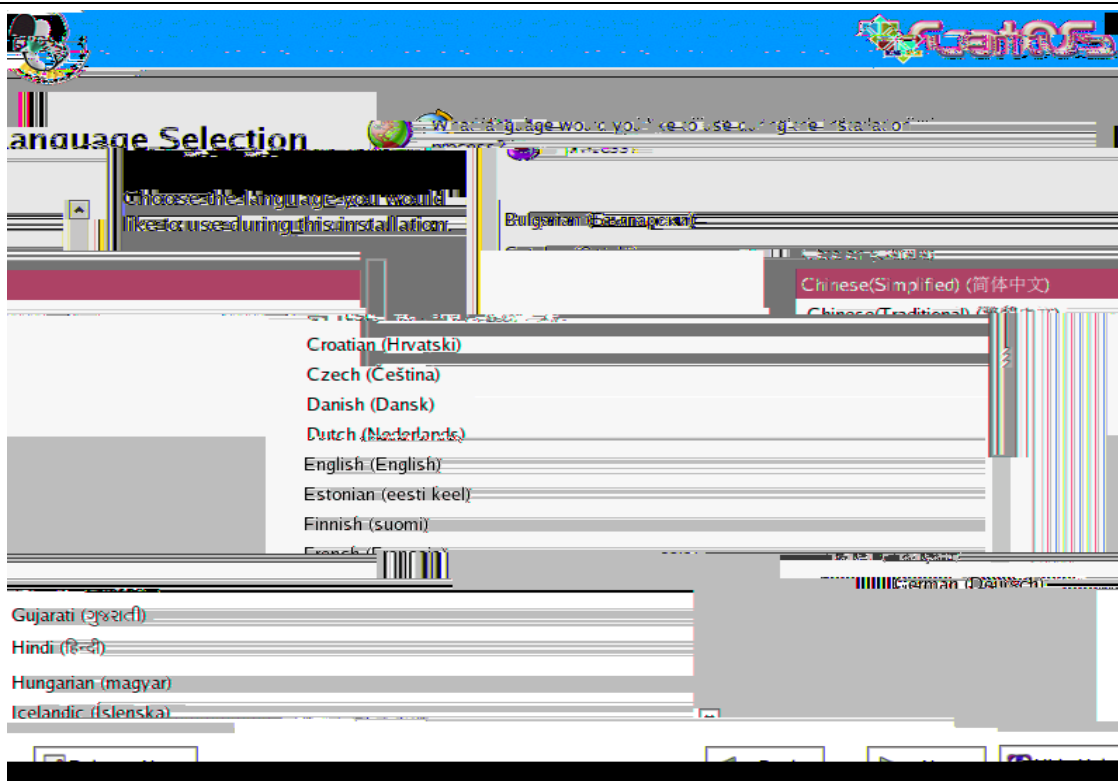

1-5

6.

1.6

8.

1.8



1-8

9.

Disk Druid


100G

1

500G


RAID

17

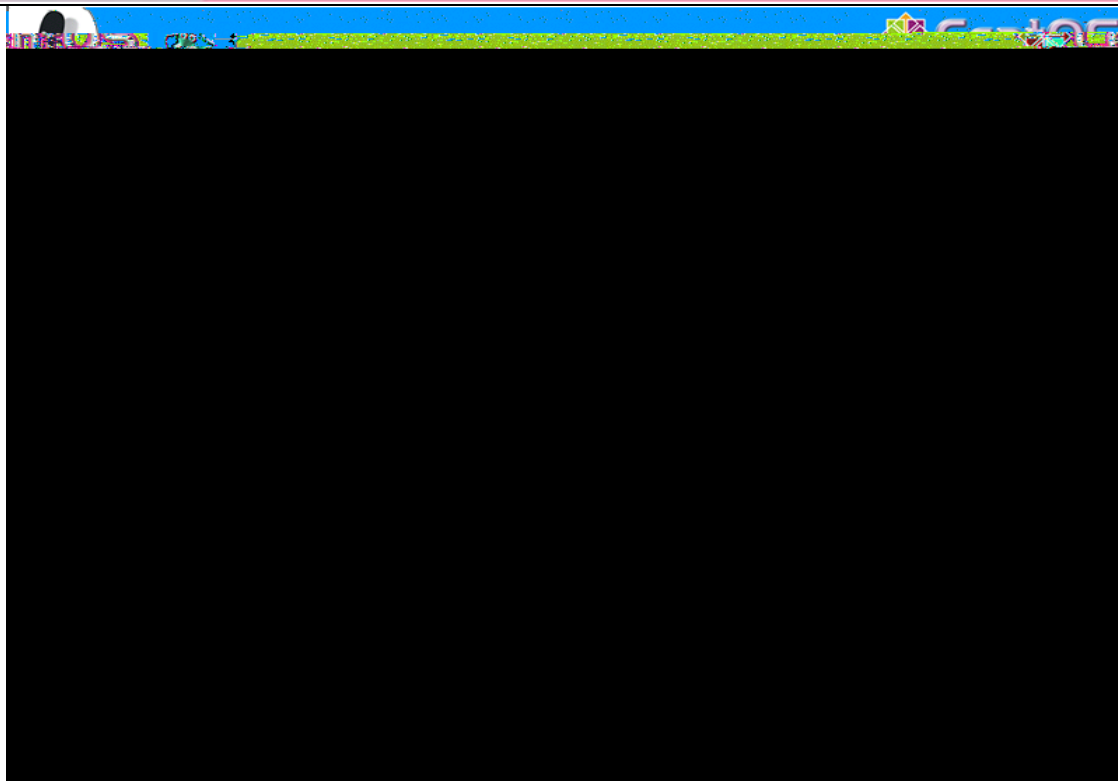

1-9

10. /dev/sda

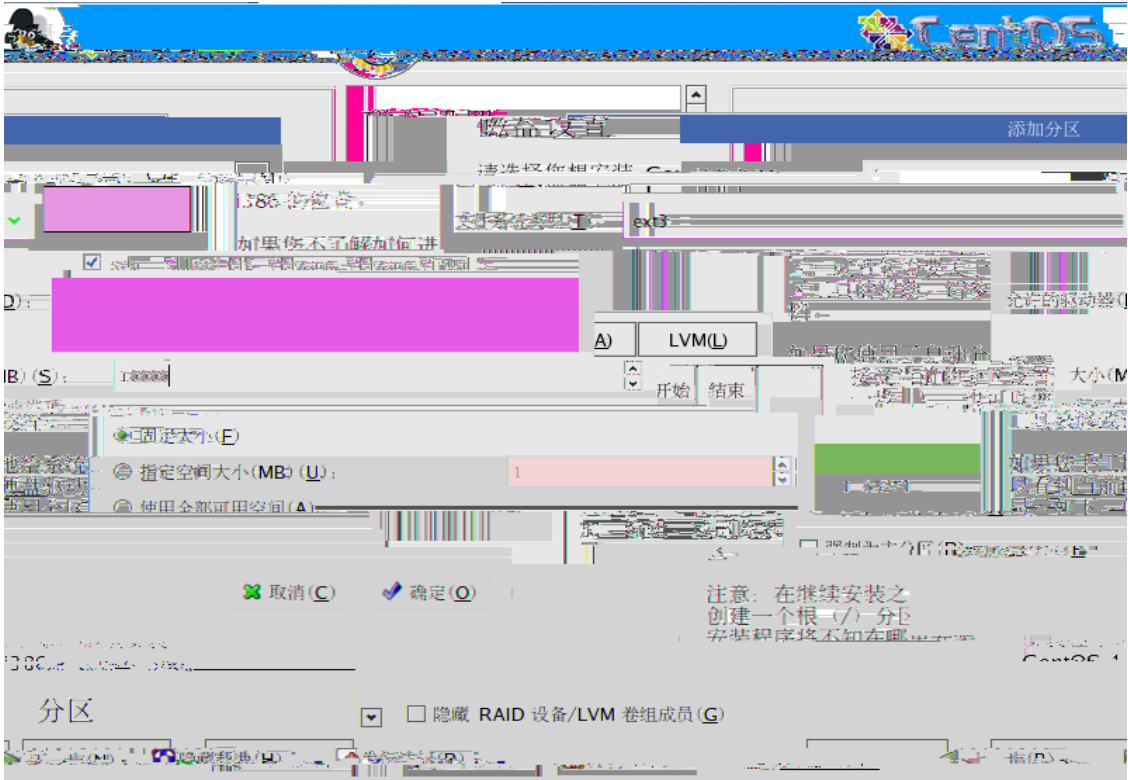

1-11

12.

1.5

(4GB ,

) swap

swap




1-12

13.

512M boot

/boot

ext3



1-13

14.

15.

/home

ext3


/home



1-15

16.

1-16

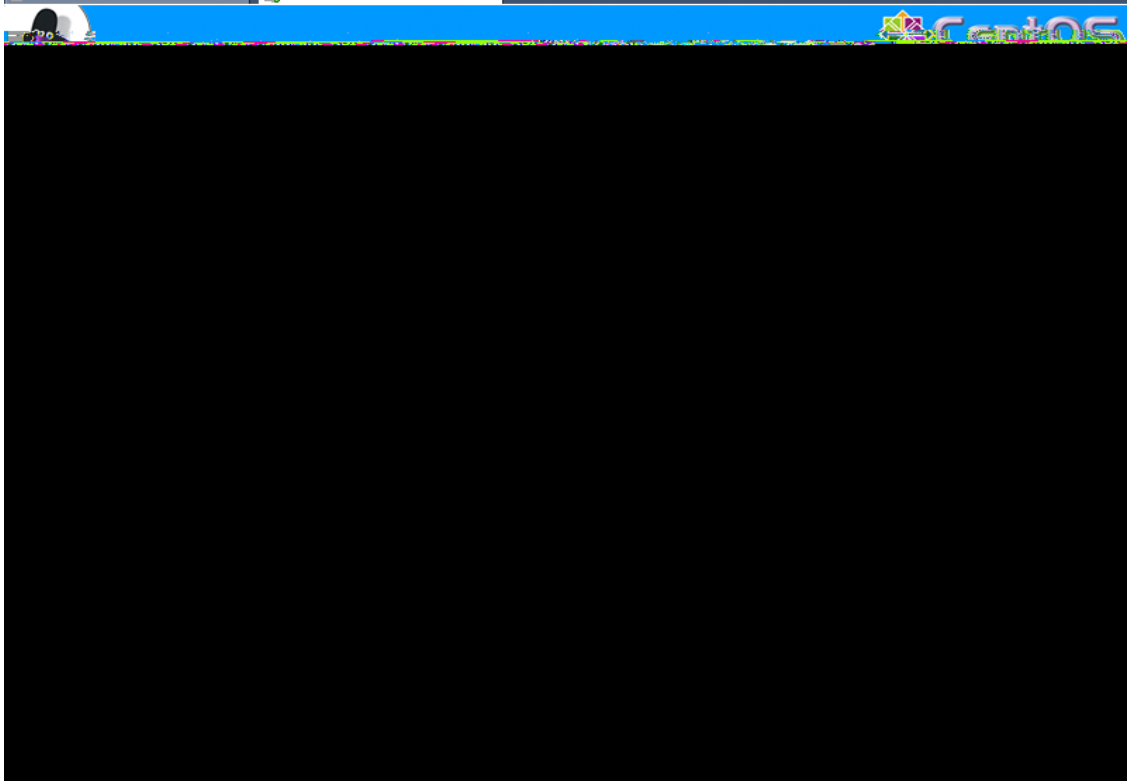


1-16

17.

9


16

RG-eLQ÷

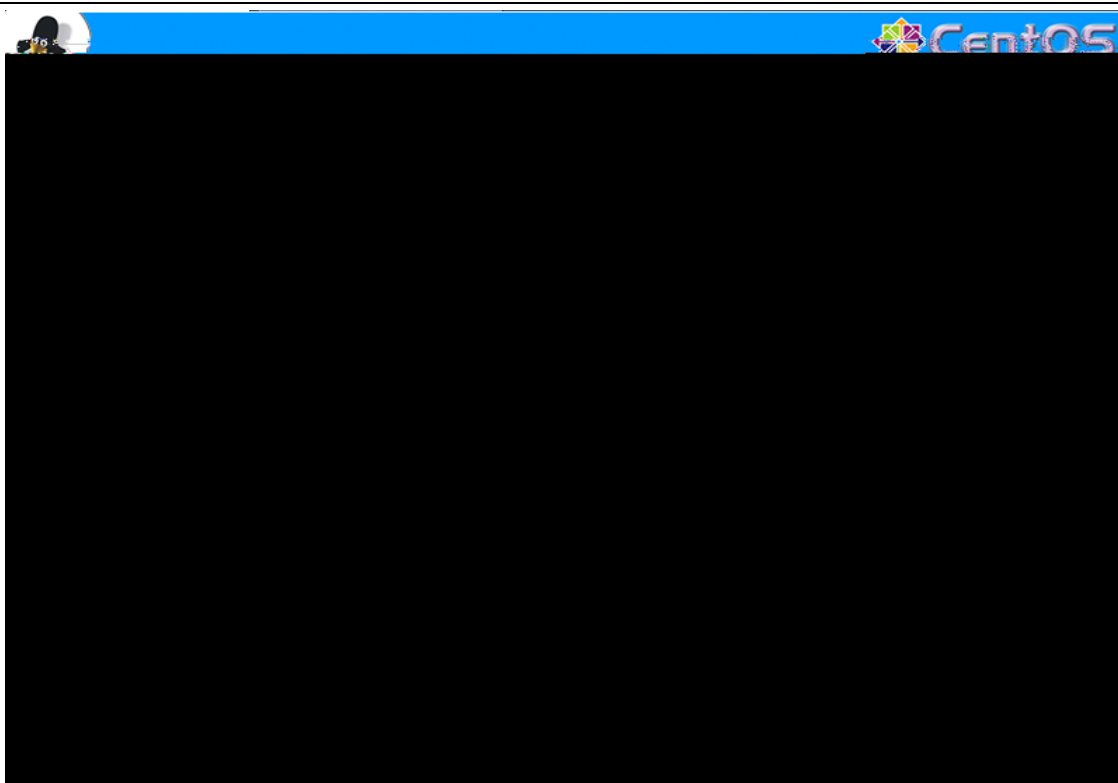


1-17

18.

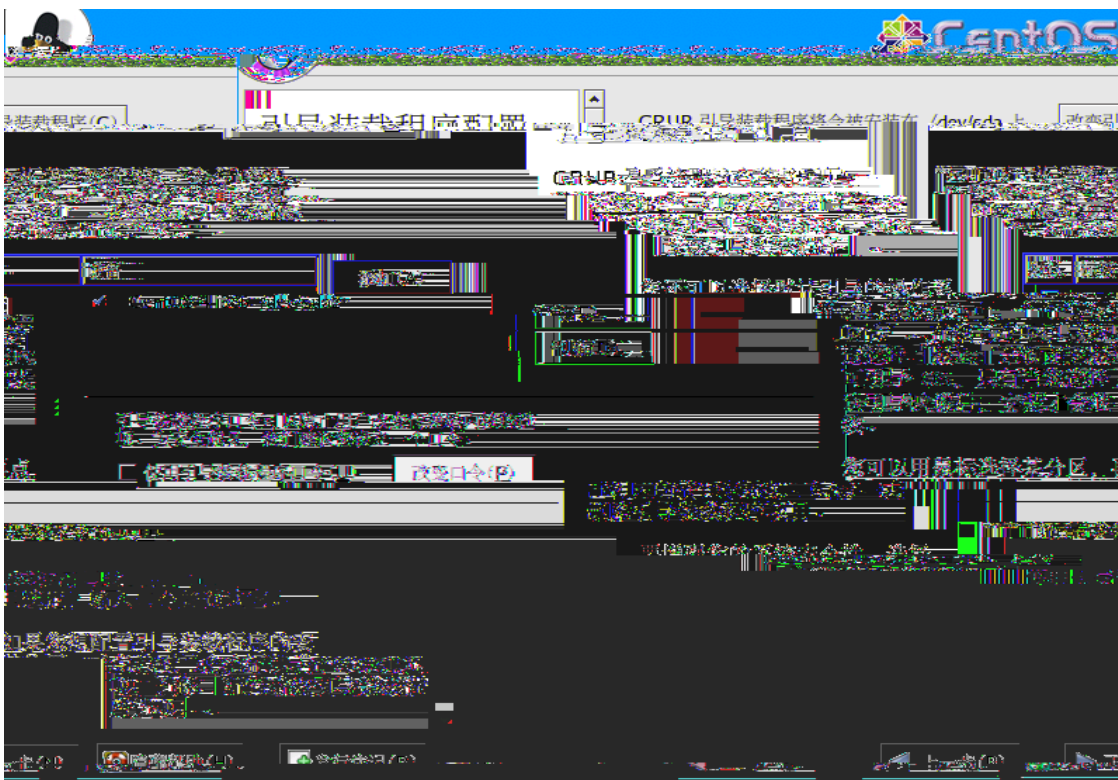


1-18

19.

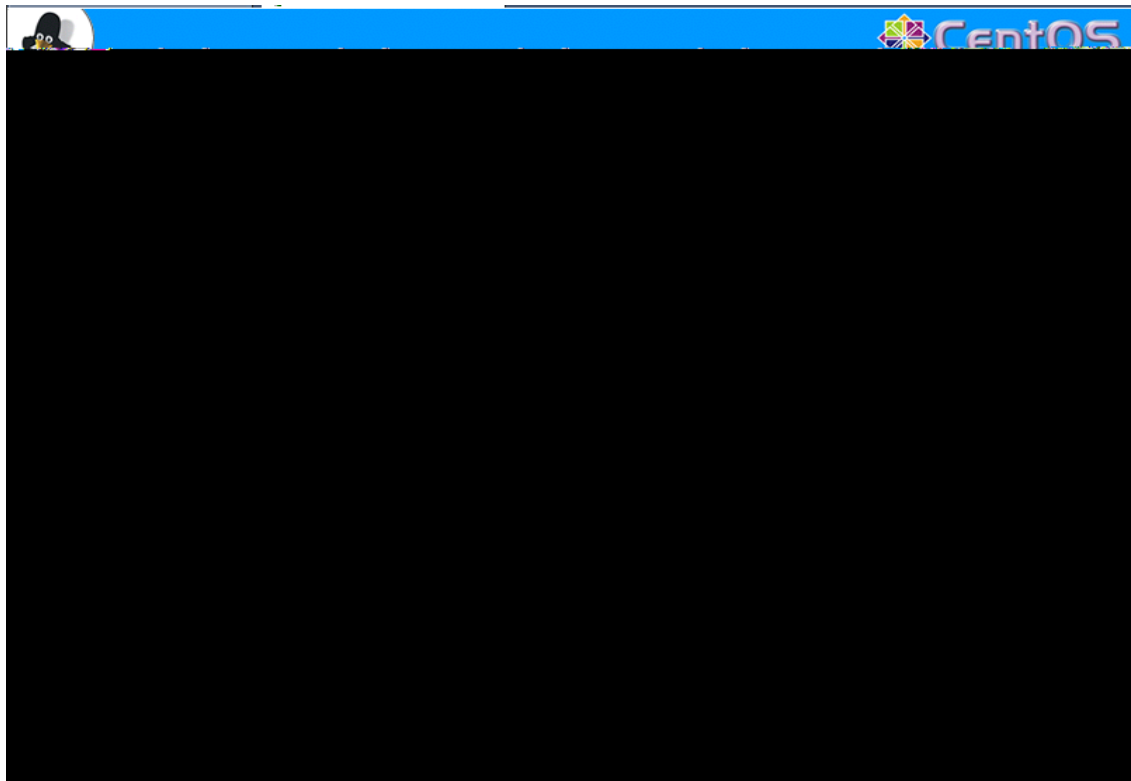

20. 1-19 , DHCP, IP, IP



1-20

21.


DNS



1-21


22.

1-22



1-22


SELinux

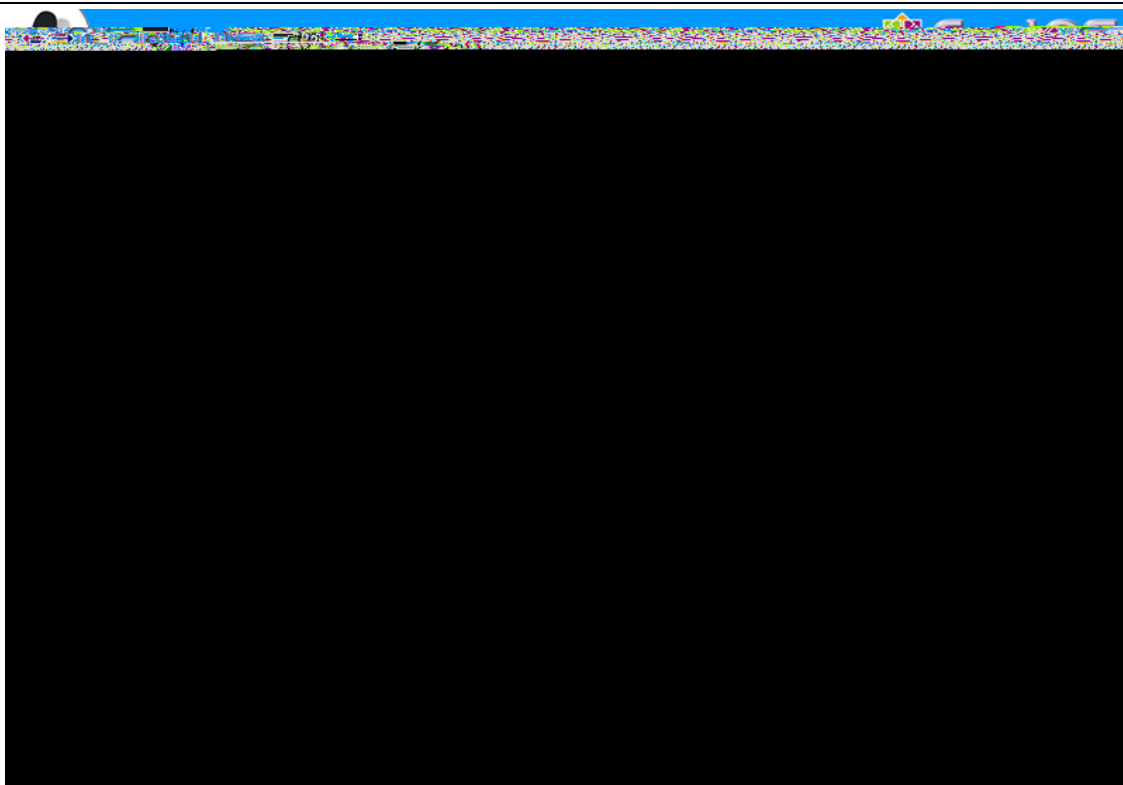

1-23

24.

English USA

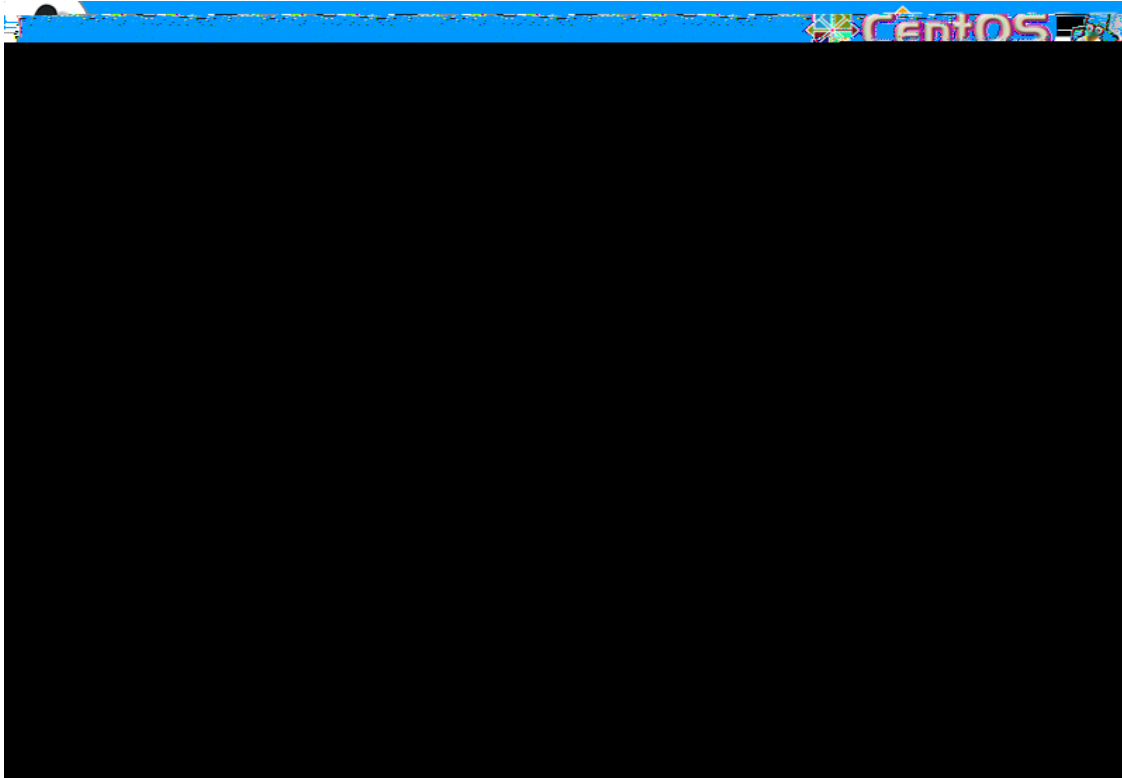

1-24


25.

26. root




1-26


27.

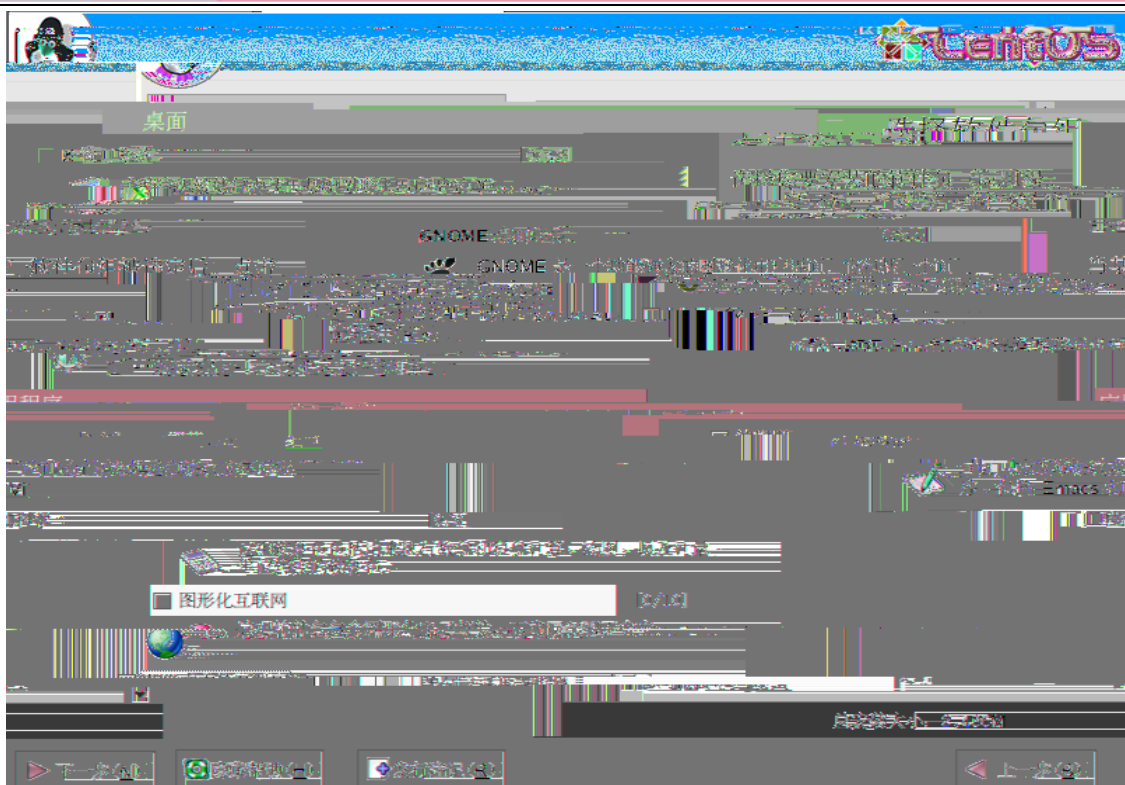


1-27

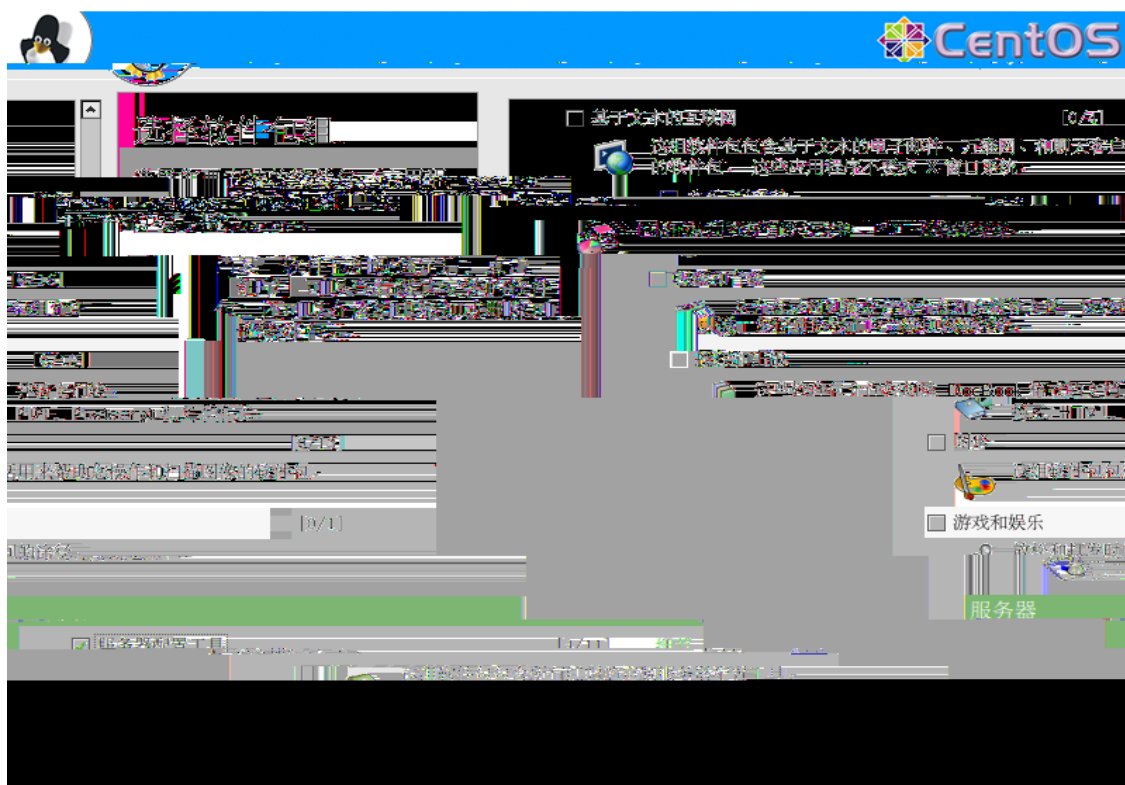


1-28

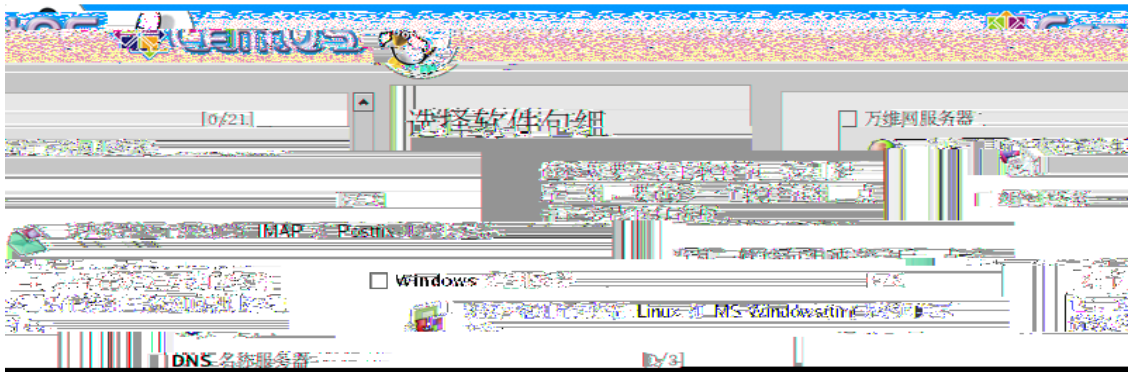

1-29

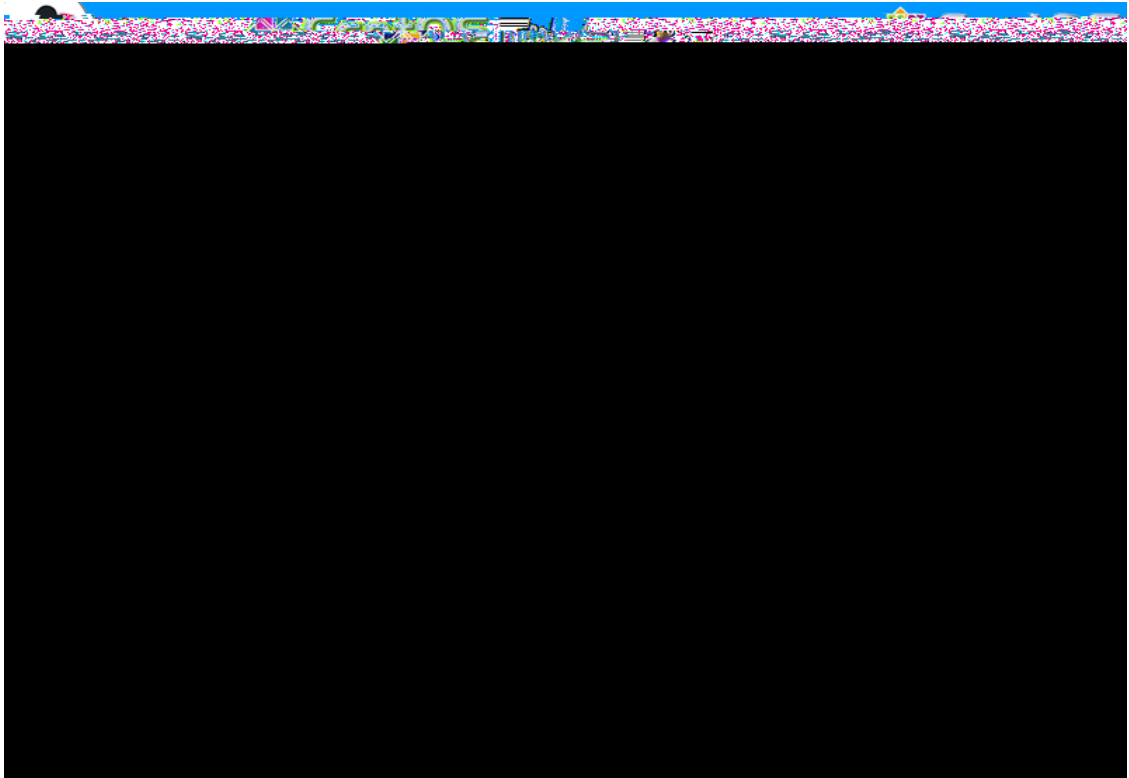

1-30

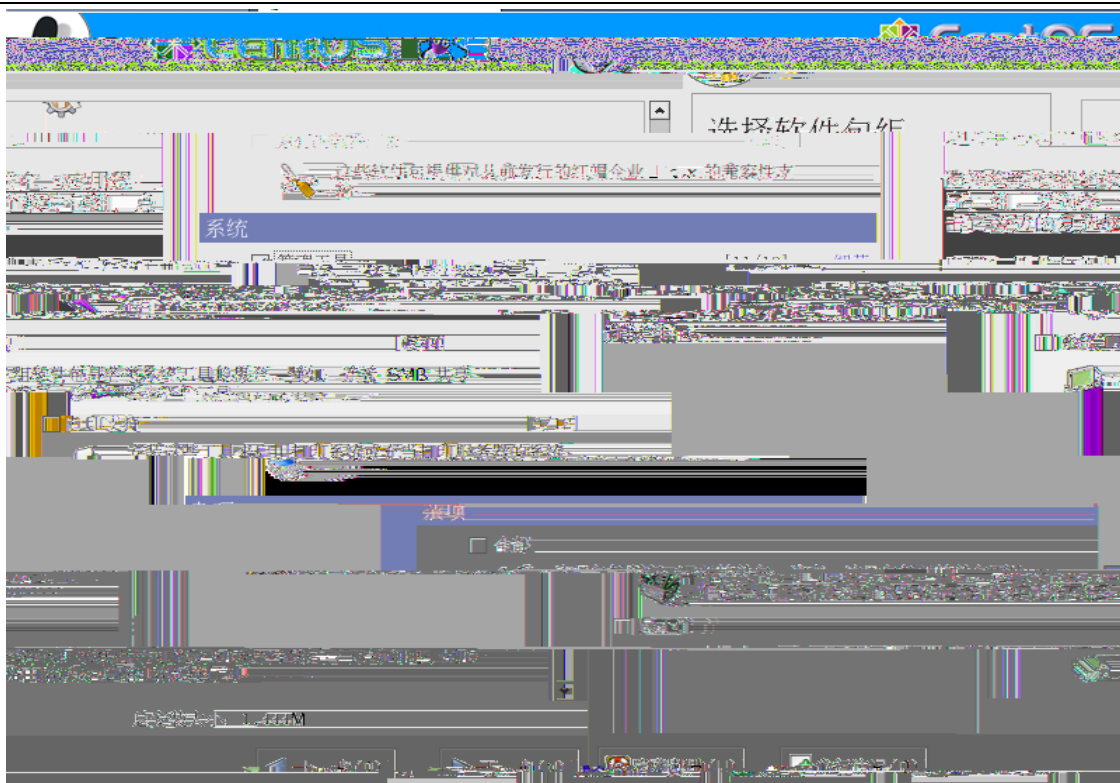


1-31

FTP

SQL


RG-eLog

28.

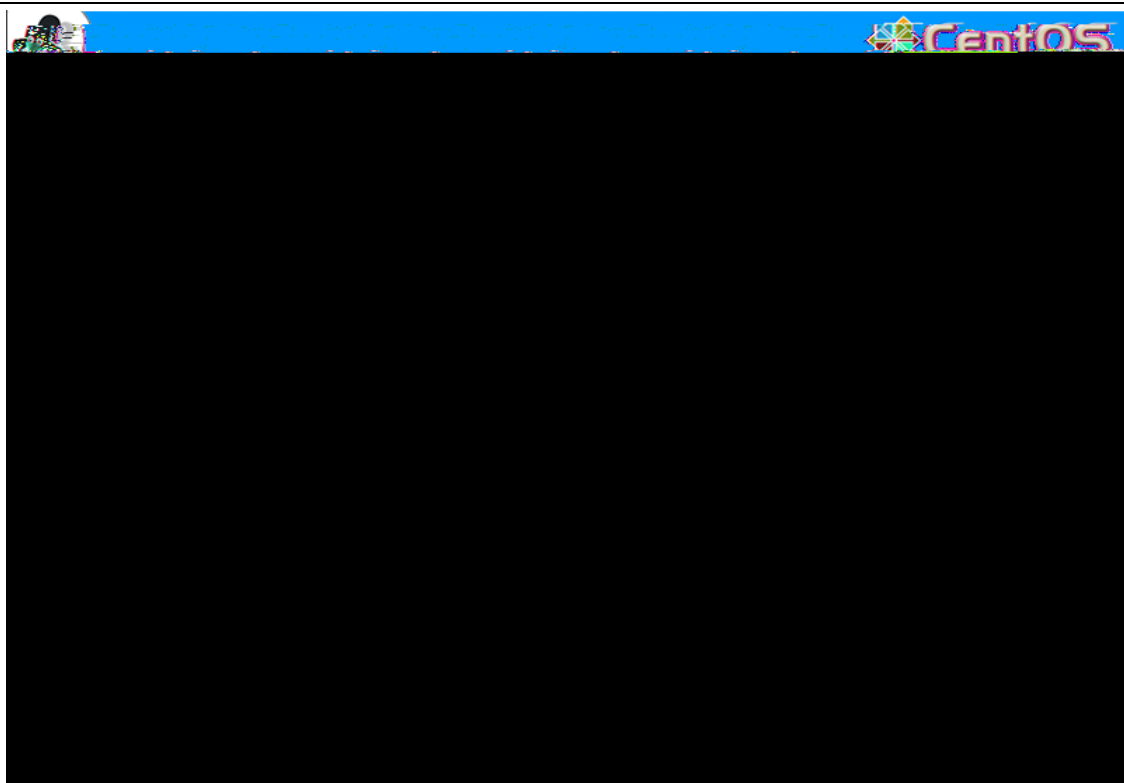

1-32


29.

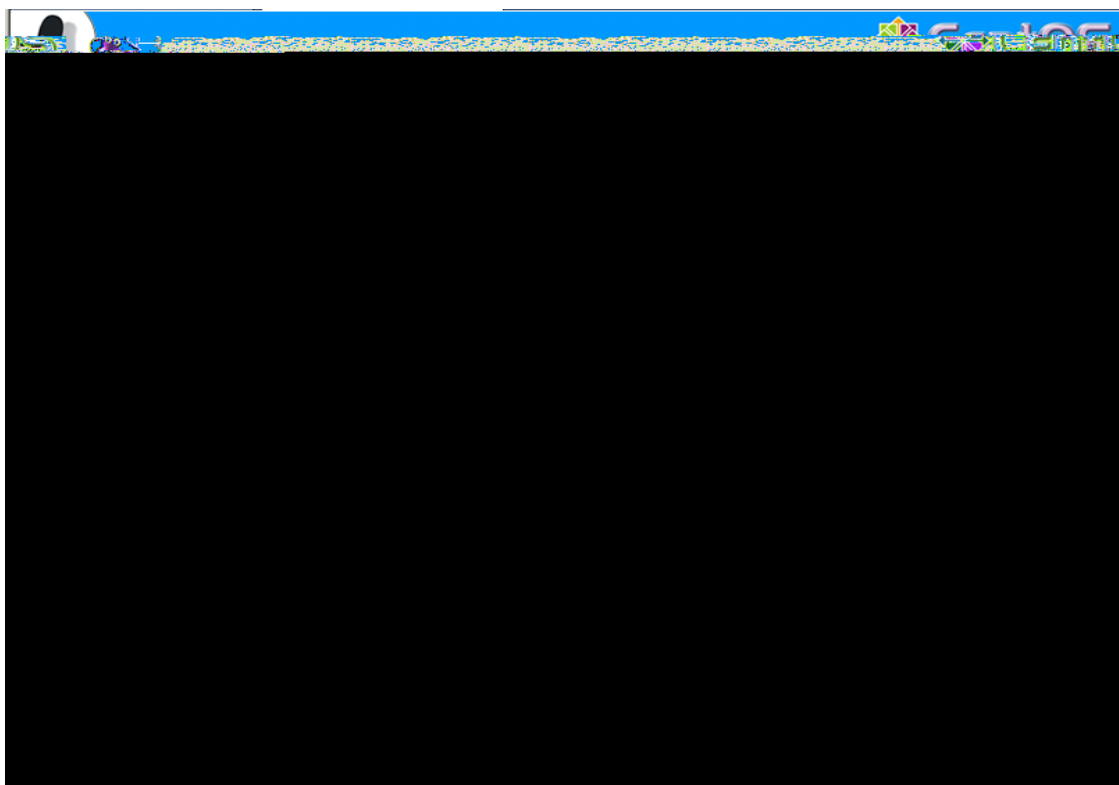

1-33

15-30


30.

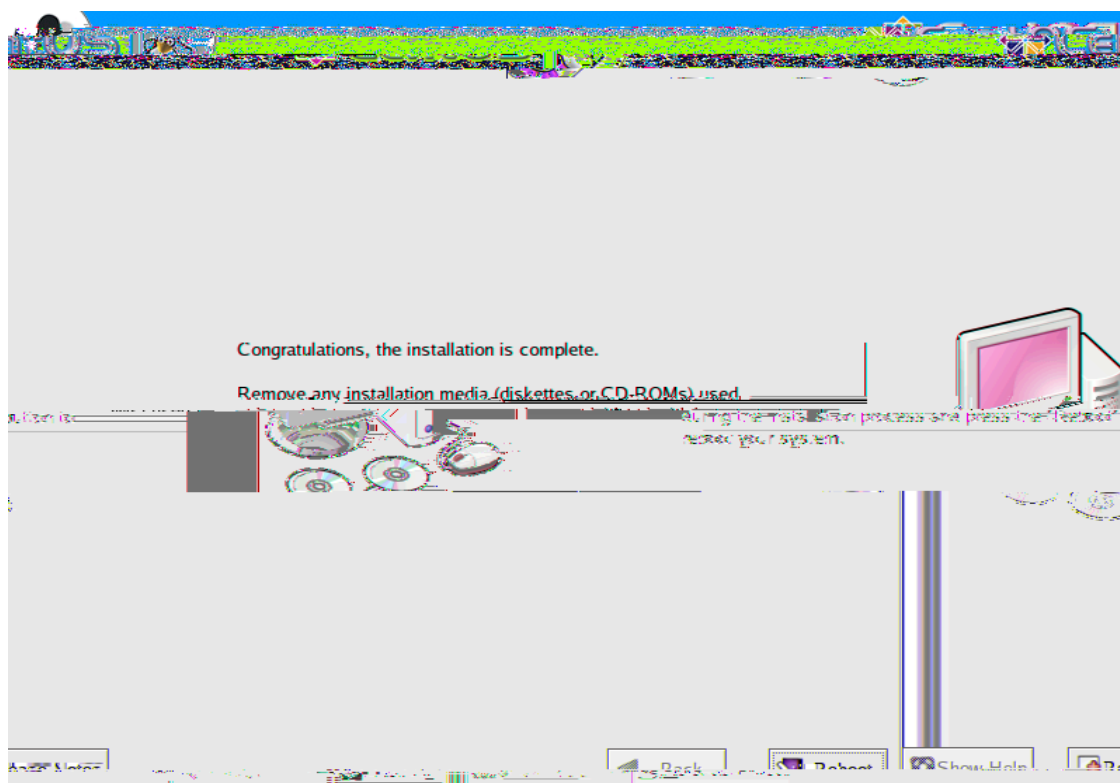

1-34

31.

Reboot



1-35

32.



1-36

33. CentOS 4.6

2 CentOS 5.5

2.1 CentOS 5.5

CentOS

5.5

2. SATA linux all-generic-ide irqpoll

1-2



2-2

3. 1-3



2-3


4. TAB Skip 1-4



2-4


5. 1-5

English

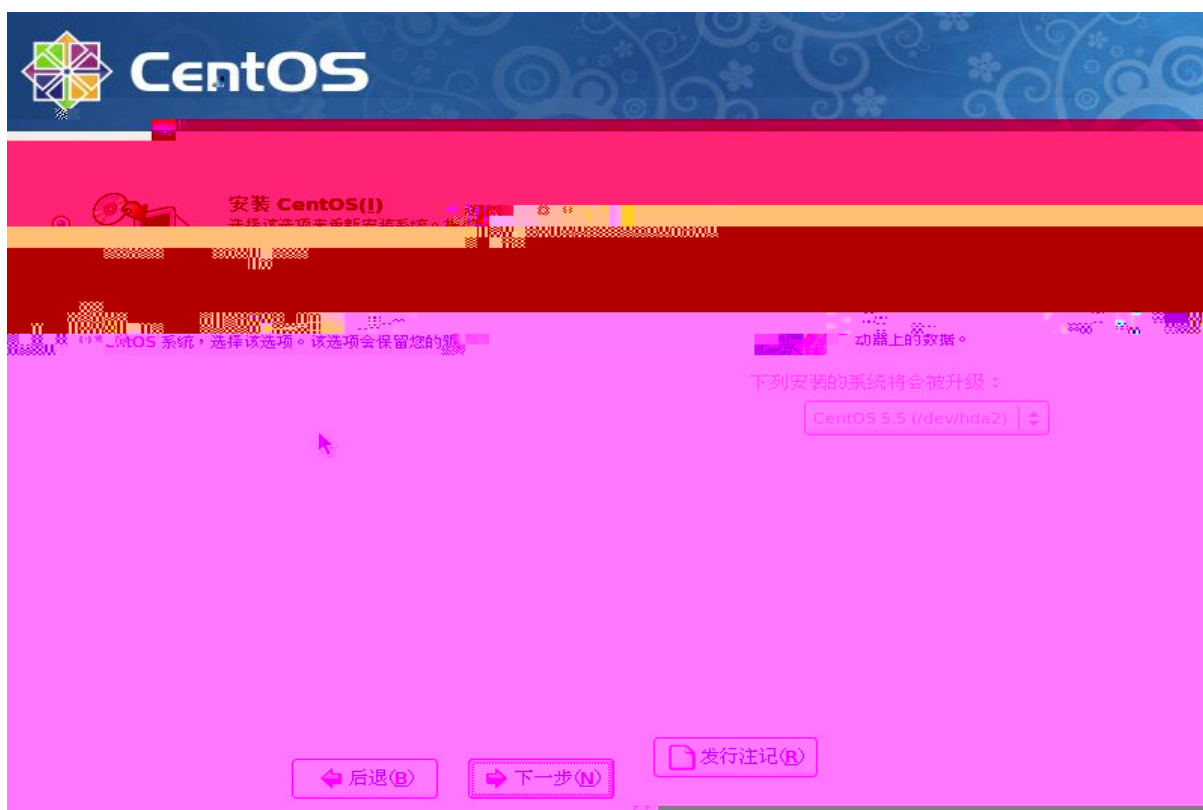

2-7

8. centos 1-8

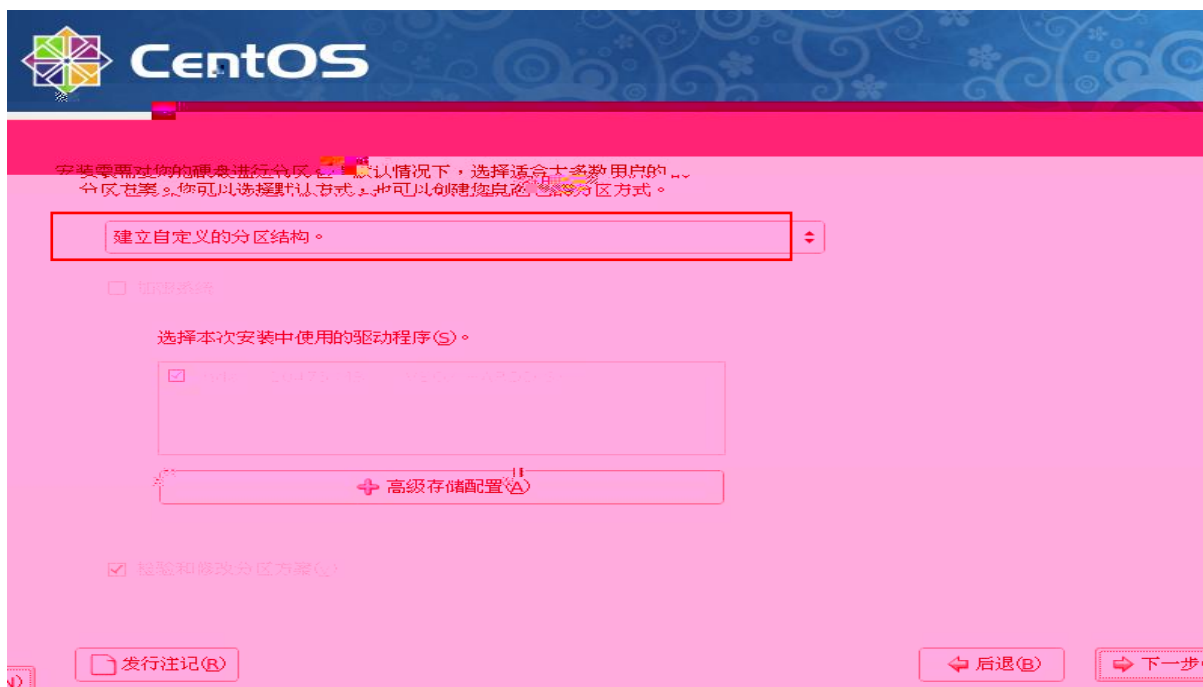


2-8

9. 1-9




2-9

10. /dev/hda



2-10

11. / ext3 10G



2-11

12. swap

38


1.5

(

4GB

,

) swap




2-12

13.

/boot

ext3

512M boot




2-13

14. /tmp ext2 15G




15. /home 2-14 /home ext3




2-15

16.


1-16



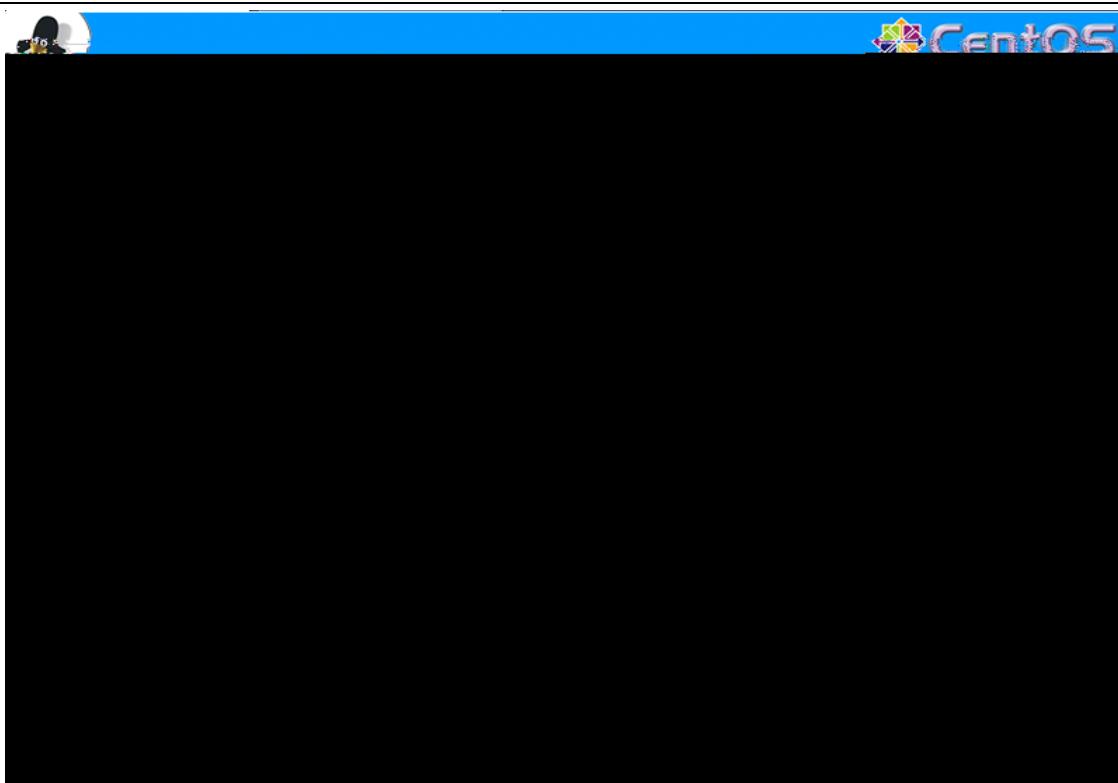

2-17

18.




2-18

19.




2-19

20. , DHCP, IP,
IP



21. DNS 1-21 2-20

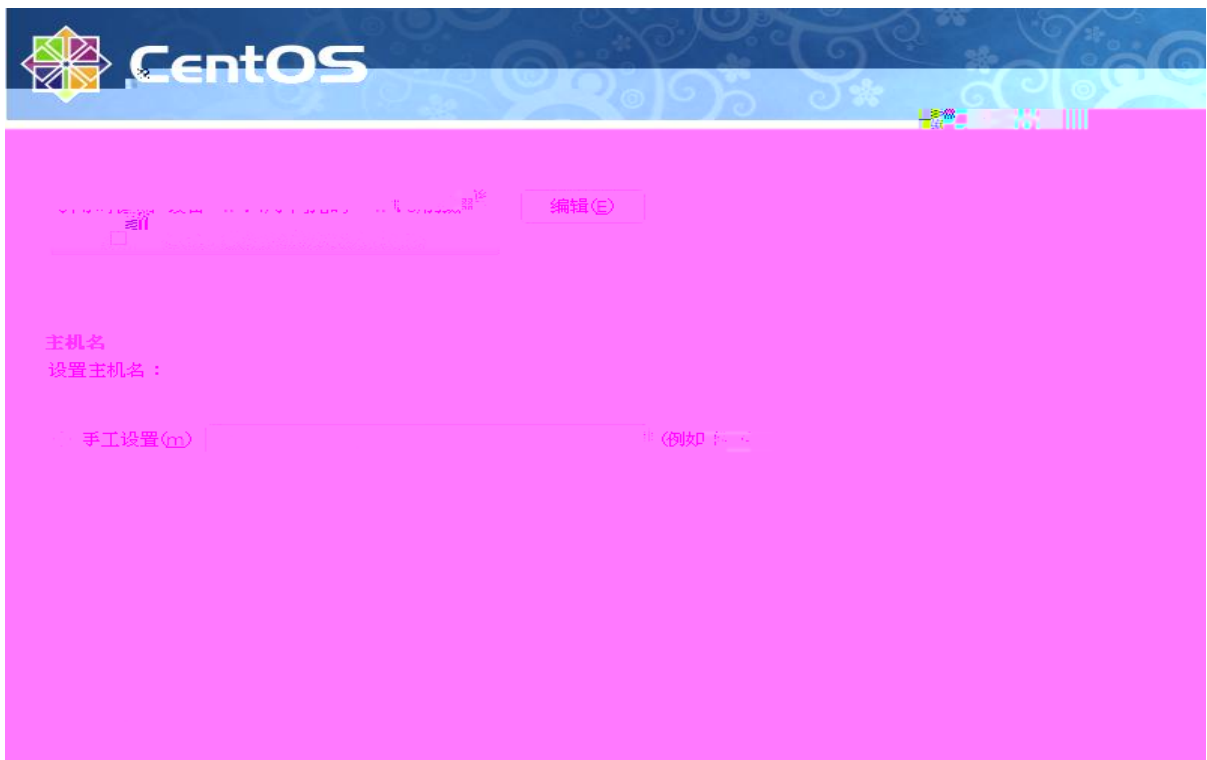


22. 2-21 1-22, / , UTC S

23. root



2-23

24.



2-24


25. Desktop-Gnome



2-25



2-26

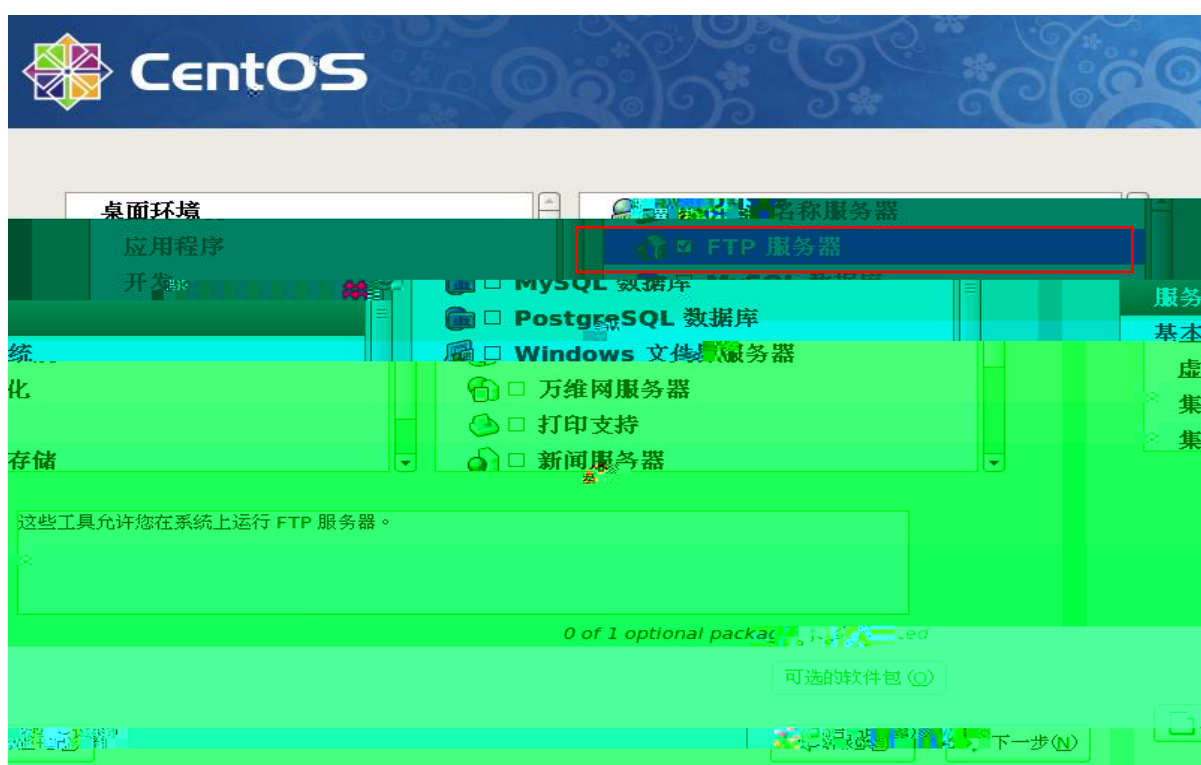

2-27



2-28



1-32

FTP

MySQL

RG-eLog



2-31

29

```
Setting clock (utc): Sat Nov 20 00:13:15 CST 2010 [ OK ]
Loading default keymap (us): [ OK ]
Setting hostname localhost.localdomain: [ OK ]
No devices found
Setting up Logical Volume Management: /dev/hdc: open failed: No medium found [ OK ]


Checking filesystems
/: clean, 47881/2560864 files, 388748/2560359 blocks
/home: clean, 11/1271712 files, 75124/1271135 blocks
/boot: clean, 35/130300 files, 32818/324000 blocks

[ OK ]
Remounting root filesystem in read-write mode:
[ OK ]
Mounting local filesystems:
[ OK ]
Enabling /etc/fstab swaps:
[ OK ]

Entering non-interactive startup
[ OK ]
Checking for hardware changes
[ OK ]
Applying iptables firewall rules:
[ OK ]
Applying iptables firewall rules:
[ OK ]
Loading additional iptables modules: ip
conntrack netbios n[ OK ]
```

2-32

30

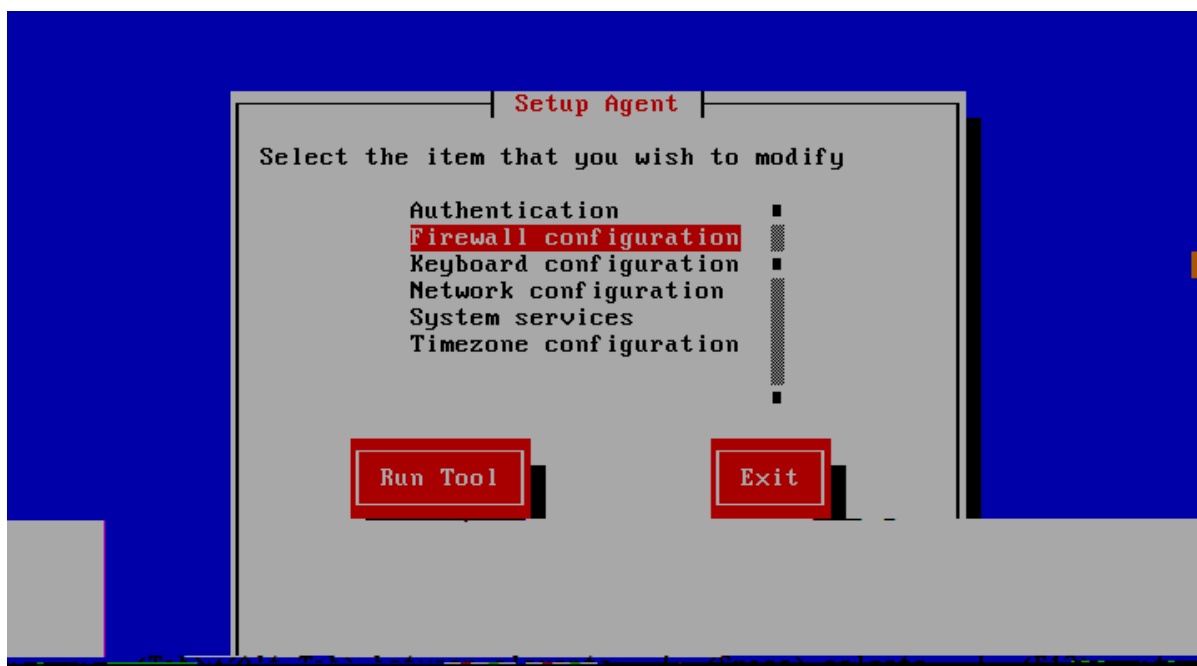

2-33

31 Firewall configuration tab Run Tool




32


selinux

Disabled

55

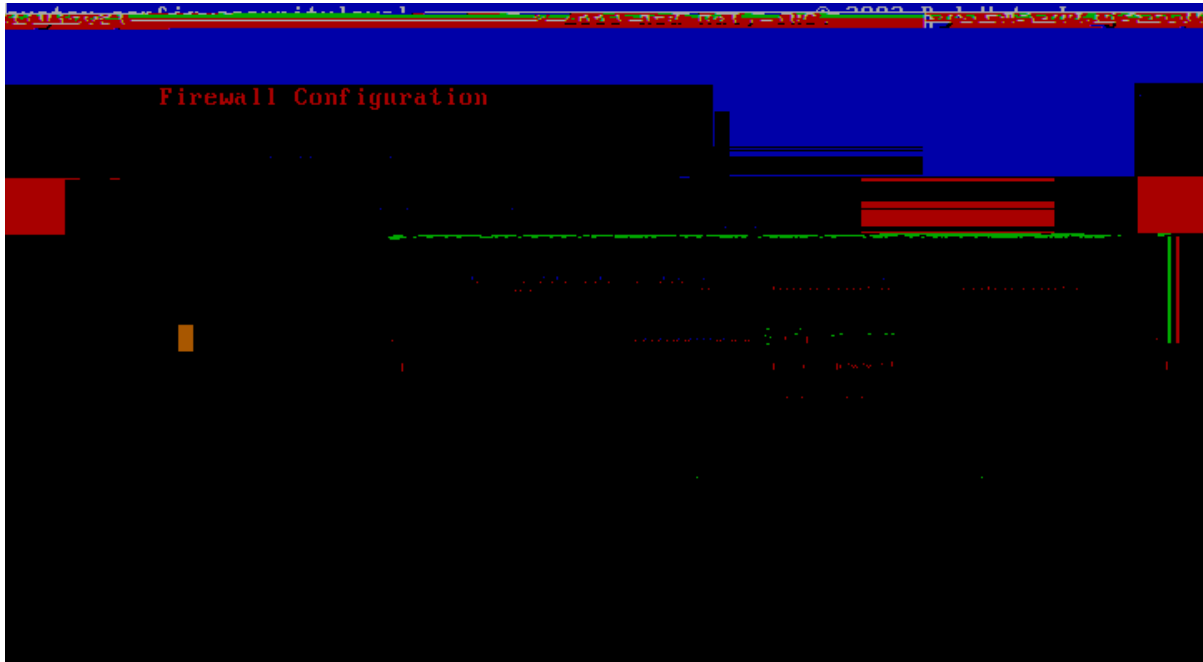

33 OK

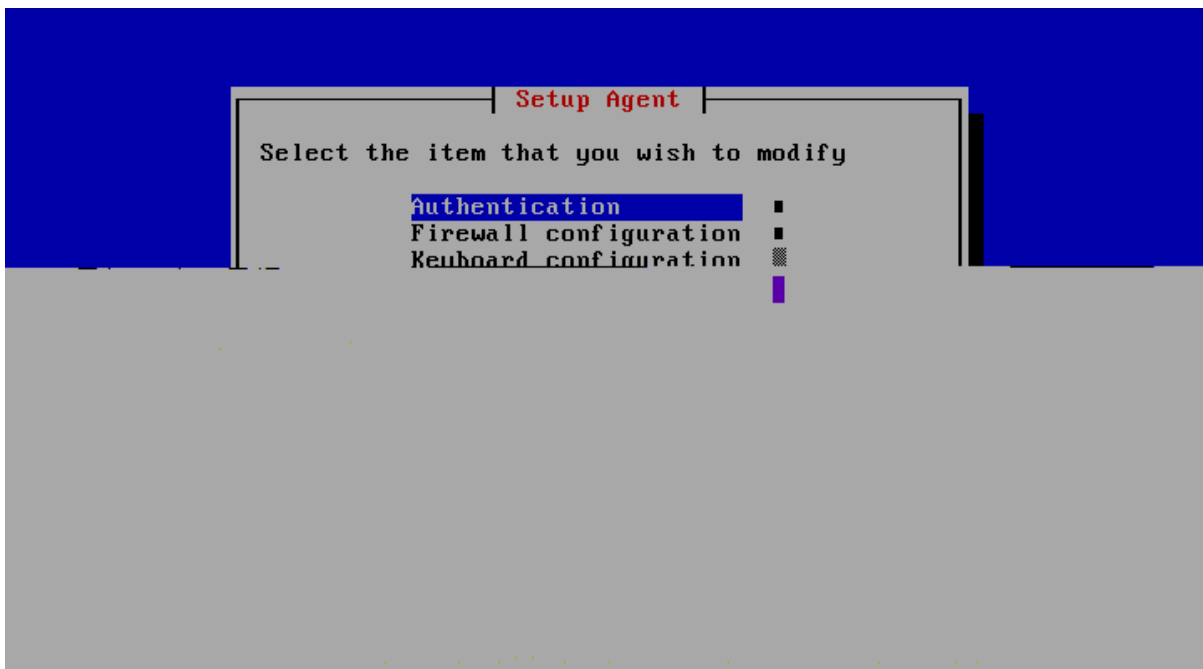

34 TAB Exit,

```
CentOS release 5.5 (Final)
Kernel 2.6.18-194.el5 on an i686

localhost login: _
```

31 CentOS 5.5

3 RG-eLog

3.1 elog.tar.gz CentOS


	elog.tar.gz	CentOS	elog.tar.gz
2.1.1	elog.tar.gz		CentOS
ftp	ftp	elog.tar.gz	2.1.2

3.1.1

elog.tar.gz
Terminal

- 1 mkdir /mnt/cdrom
- 2 mount /dev/cdrom /mnt/cdrom
- 3 cp /mnt/cdrom/elog.tar.gz /root/elog.tar.gz
elog.tar.gz /root

3.1.2 CentOS FTP

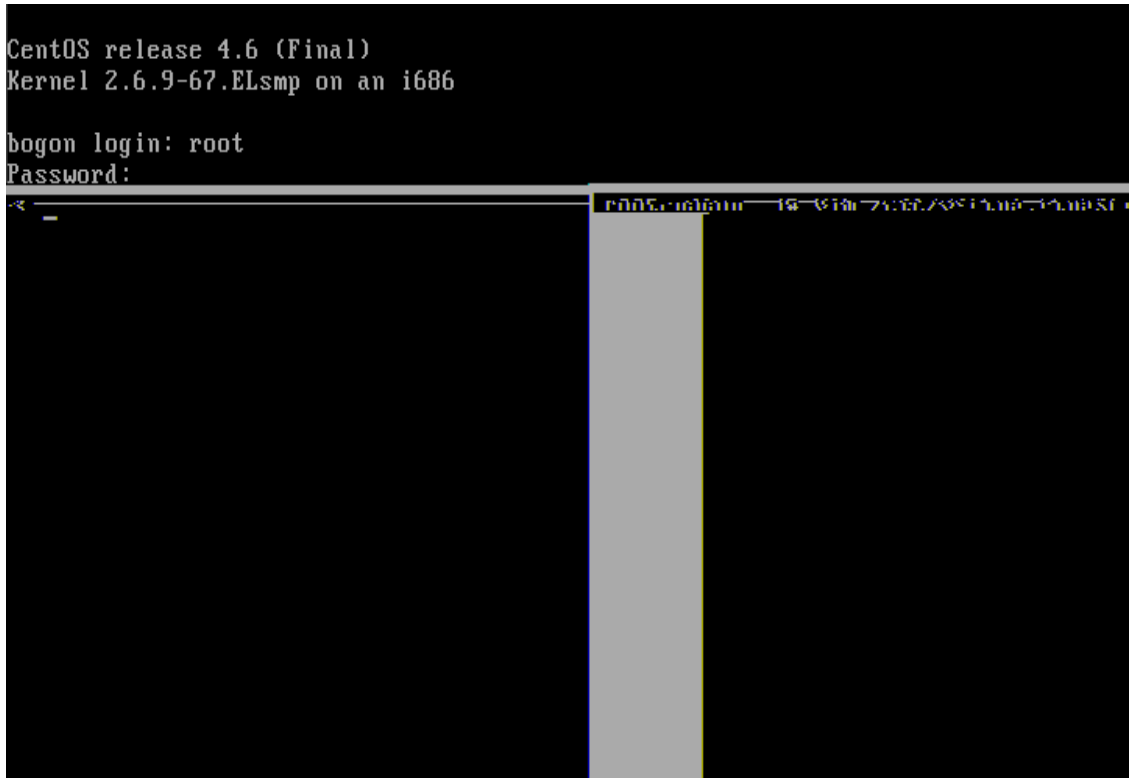

3-1


3-2

3-3

```
# usftnd userlist _
```

3-4

3-5

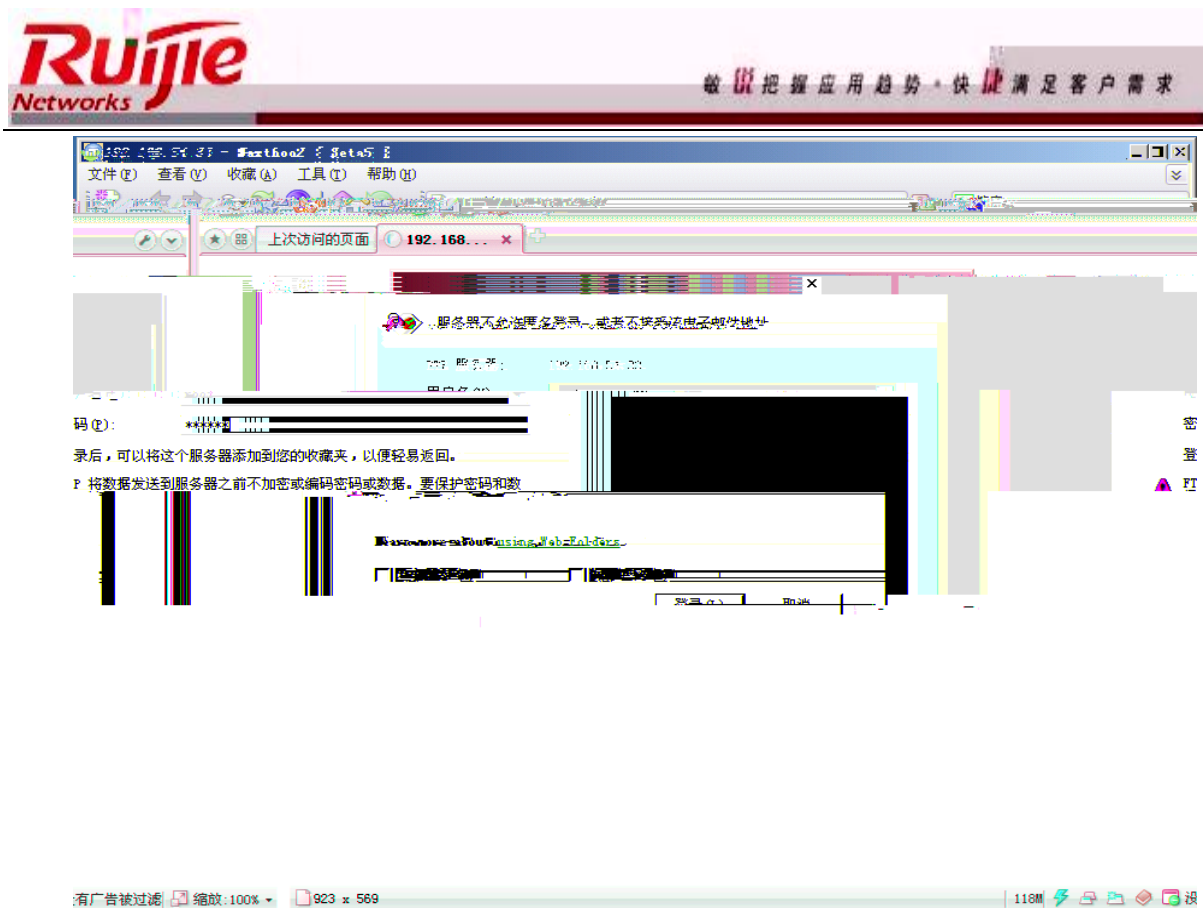

3-6

3.2 CentOS RG-eLog

1. `elog.tar.gz` `/root`
`cd /root` `root` `ls` `root`


```
opt/mysql/lib/mysql/libdebug.a
opt/mysql/lib/mysql/libmysqlclient.so.16.0.0
opt/mysql/lib/mysql/libmystrings.a
opt/mysql/lib/mysql/libmysqlclient_r.so
opt/mysql/lib/mysql/libmysqlclient_r.so.16.0.0
opt/mysql/lib/mysql/libmysqld.a
opt/mysql/lib/mysql/libmyisam.a
opt/mysql/lib/mysql/libmysqlclient.so
opt/mysql/lib/mysql/libmysqlclient.a
opt/mysql/lib/mysql/libvio.a
opt/mysql/lib/mysql/libmysys.a
```

3-9

[illegible]

3-10

2-11

3-11

```

herin_install_dog_driver
5-67.ELsmp
modules/2.6.9-67.ELsmp/rcdog
dog.ko /lib/modules/2.6.9-67.ELsmp/rcdog/usbdog.ko /bin/cn_usl
/bin/chmod 700 /lib/modules/2.6.9-67.ELsmp/rcdog/usbdog.ko
if [ -e /lib/modules/2.6.9-67.ELsmp/modules.dep.1: then \
usbdog.ko: /lib/modules/2.6.9-67.ELsmp/modules. indep=' /bin/grep 'rcdog/
dep'; \
\ if [ -z "$indep" ]; then
modules/2.6.9-67.ELsmp/rcdog/usbdog.ko:" >> /lib /bin/echo "/lib/
dep; \ /modules/2.6.9-67.ELsmp/modules.
/lib/modules/2.6.9-67.ELsmp/modules.dep; \ /bin/echo "" >>
fi; \
fi; \
inlocal='/bin/grep 'usbdog' /etc
/bin/cat "$PWD/usbdog_load" >> /etc/rc.d/rc.local;\
i; \
"usbdog: /lib/modules/2.6.9-67.ELsmp/rcdog/usbdog.ko" >> /etc/rc.d/rc.local;\
/bin/echo "Please notice the order to setup the dog driver"

```

3-12

5.

RG-eLog

3.3 CentOS

RG-eLog

3.4 CentOS RG-eLog

```
sh /upgrade/upgrade.sh
```

3.5 CentOS tcpdump

Centos	tcpdump	
centos4.6	tcpdump	F:\CentOS\RPMS\ tcpdump-3.8.2-12.el4.i386.rpm
centos5.5	tcpdump	F:\CentOS\ tcpdump-3.9.4-15.el5.i386.rpm
F		

4 RG-eLog

4.1

			RG-eLog	
1	Terminal	ps ax	RG-eLog	
1	./npeserver	11	.(:	2808 ,
			)	

```
[root@localhost ~]# ps -ax | grep npeserver
Warning: bad syntax, perhaps a bogus '-'? See /usr/share/doc/procps-3.2.7/FAQ
2740 ?      $1      0:00 ./npeserver
2808 ?      $        0:00 ./npeserver
2809 ?      $        0:00 ./npeserver
2810 ?      $        0:00 ./npeserver
2812 ?      $1      0:00 ./npeserver
2814 ?      $1      0:00 ./npeserver
```

4-1

2	java	java	2
---	------	------	---

```

root@localhost ~]#
root@localhost ~]#
root@localhost ~]#
root@localhost ~]#
root@localhost ~]#
root@localhost ~]#
root@localhost ~]#
root@localhost ~]#
root@localhost ~]#
root@localhost ~]#
root@localhost ~]#
root@localhost ~]#
root@localhost ~]#
root@localhost ~]#
root@localhost ~]#
root@localhost ~]# ps -ax | grep java
Warning: bad syntax, perhaps a bogus '-'? See /usr/share/doc/procps-3.2.3/FAQ
3469 ?      S1      0:01 /opt/j2sdk/bin/java -jar /opt/jms/jms.jar
3495 ?      S1      0:29 /opt/j2sdk/bin/java -server -Xms128m -Xmx512m -Dsun.r
ai_dgc_client.gcInterval=2600000 -Dsun.rmi_dgc_server.gcInterval=2600000 -Dsun

```

4-2

3 mysql , mysql , mysql ,

```


root@localhost ~]#
root@localhost ~]#
root@localhost ~]#
root@localhost ~]# ps -ax | grep mysql
Warning: bad syntax, perhaps a bogus '-'? See /usr/share/doc/procps-3.2.3/FAQ
mysql --pid-file=/home/mysql/localhost.localdomain.pid
err -dir=/home/mysql --user=mysql --log-error=/home/mysql/localhost.localdomain.
port=-pid-file=/home/mysql/localhost.localdomain.pid --socket=/tmp/mysql.sock --
3306
-data 3322 ?      S      0:00 /opt/mysql/libexec/mysqld --basedir=/opt/mysql --
err -dir=/home/mysql --user=mysql --log-error=/home/mysql/localhost.localdomain.
port=-pid-file=/home/mysql/localhost.localdomain.pid --socket=/tmp/mysql.sock --
3306
-data 3323 ?      S      0:00 /opt/mysql/libexec/mysqld --basedir=/opt/mysql --
err -dir=/home/musql --user=musql --log-error=/home/musql/localhost.localdomain.
3306
sqld --basedir=/opt/mysql --data 3488 ?      S      0:00 /opt/mysql/libexec/my
mysql/localhost.localdomain.err -dir=/home/mysql --user=mysql --log-error=/home/m
--socket=/tmp/mysql.sock --port=-pid-file=/home/mysql/localhost.localdomain.pid
3306
root@localhost ~]#
root@localhost ~]#

```

4-3

， RG-eLog

2 RG-eLog WEB RG-eLog IP
192.168.54.185 IE <http://192.168.54.185:8080/elog>
(:WEB 3~4 ,)

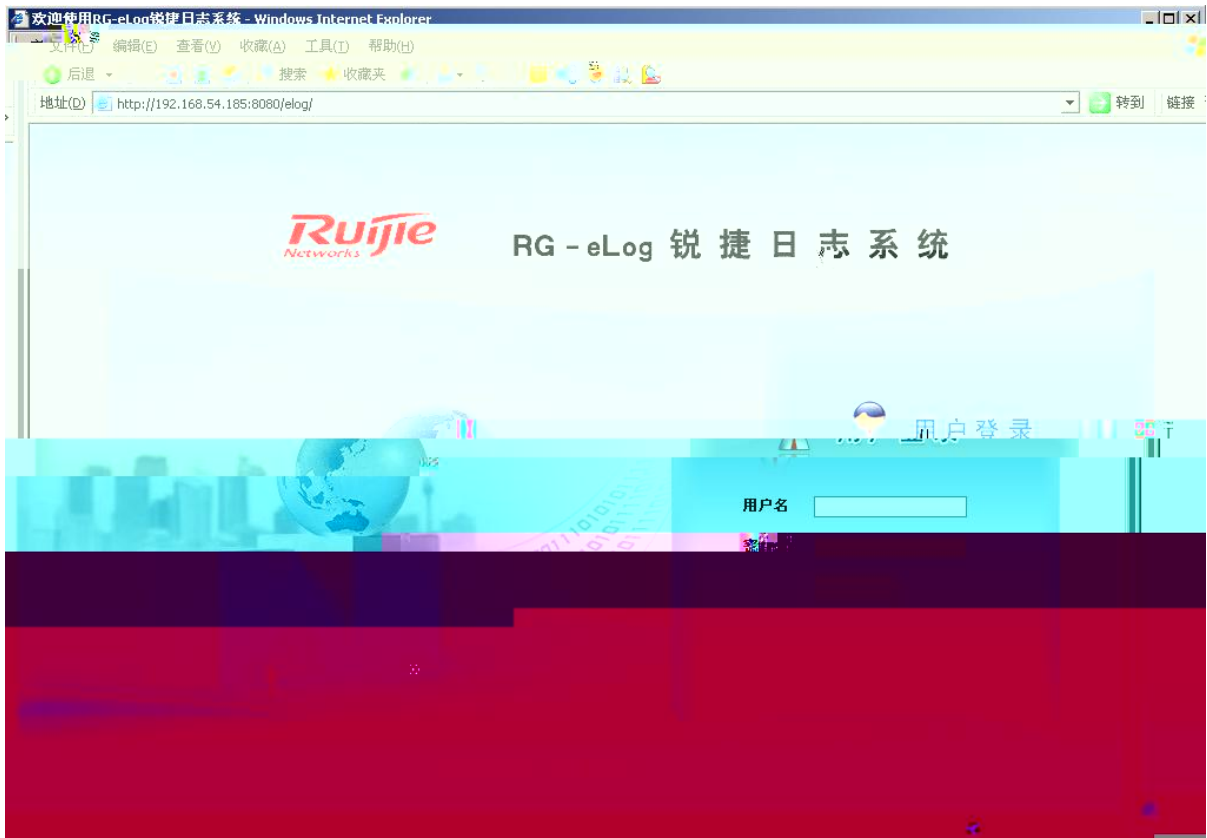


4-4



4-5

3 , RG-eLog
 NPE
 14 08 NPE 15 30 ,X 14 00-14 59 yAU

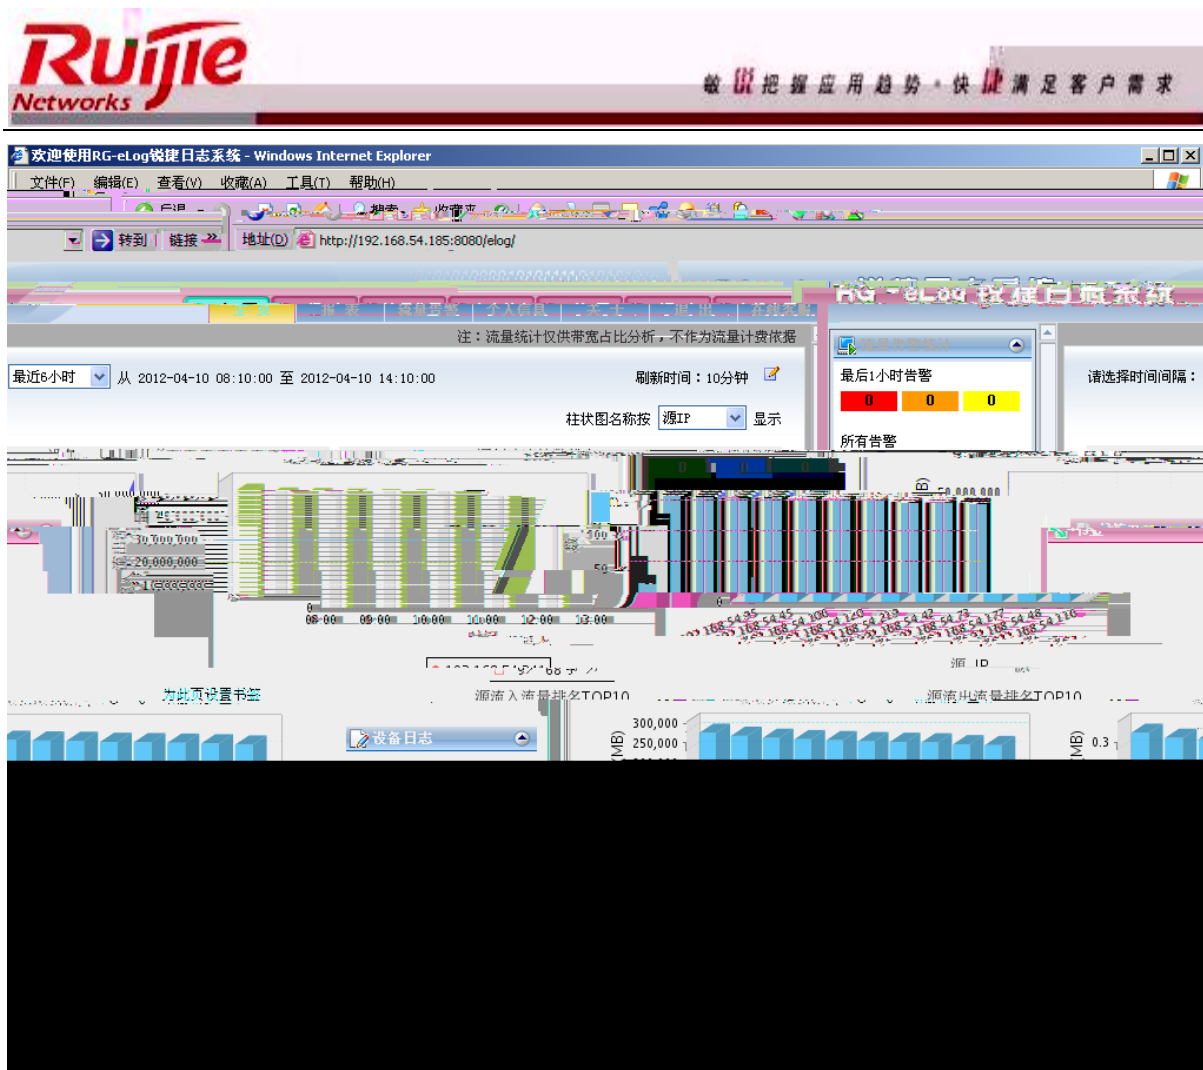

4-6

4.2

RG-eLog

4.2.1 `./npeserver`

- 1 `make`
- 2 `mysql` `mysql` `npeserver`
- `mysql`

