

RG-RSR10-X-07

F ^

copyright © 2023 iHài

' +Î† CÎÒ¢ %²äÓïož

Ì±ñiHài 0µ•Uk`~%yy K ±Y`~•"ê¥"+Î† Bãê¶BÄ

g Ö òo• d £o•

Õao• "wo•nno•ì è¿US`o•1¿Bãê¶B 9£ (oż



y¿U iHài£ö® iHài £öož

Î† UC ¿UñÄ£öêh££ök _ ñÄK(Äož

ÓñÆ1 D}o•Æ êÔÅ^•I£ `cyÚ. ³ØkÎ† T Bãê¶BD}o•Æ êÔÅU

"ÓÆ1ê... 8 \$Äož"³`cPÄ³ kiHài+Î† Ä Y`~¢PêóP Ò¢ê'sož

9D}ÍÎ´ê¿U=ækÎ† Ä k Ê g¾•ożiHài' "ZÄ`~*=êñUP ÕÑ +
† Ä g"w Óïož

ÎôÆN• ... 6-ożiHài"ÚÊÎôÆž]@ 'š¿Ä ŒGU´kxw G'ôÆÄ ¶ZÄj"

ê4¥kÎôÆ ñÄ'Î- äè`~¢Pê¹P 'oż

2.

Î ô Æ J P B ã ' Î g ò D } ° Z o • T o • € M • ° o • ÷ ^ μ ^ h
Í Î Õ ož

N ^ @ ð k À } ' Î ¬ Y Ž ... D }


1

RSR10-X-07

1.1 RSR10-X-07

RSR10-X-07	32
RISC	
RSR10-X-07	
VPN IPv6 MVRP MPLS	QoS

RSR10-X-07

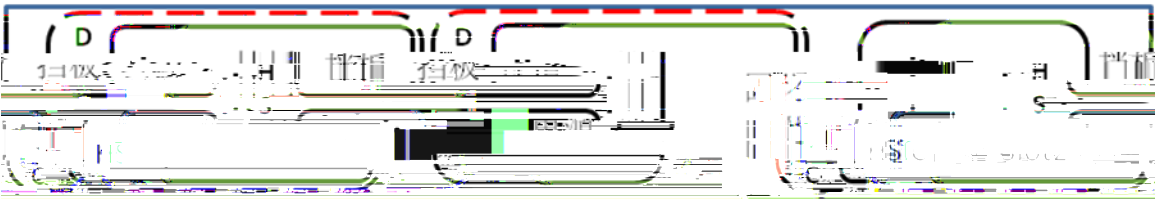


	2	3	
HSIC-4G-LTE	√	√	X
DHSIC-6GSW	√	√	X
RG-PA60	X	√	√
HSIC-2E1/CE1	√	√	√
HSIC-5G-NR	√	√	√

2	HSIC	2	3	OFL	OFL
1		3		DHSIC	
2	DHSIC	2	3	OFL	OFL
DHSIC	"	"	HSIC	2	

	RSR10-X-07									
	3	WAN	4	LAN	3	WAN	10M/100M/1000M			
	1	1000M/100M SFP	4	LAN	4	10M/100M/1000M	1	USB 2.0		
	1	Console	1	SD		FUNC				
HSIC	2	2		HSIC/DHSIC						


	RISC		
BOOT ROM	2MB		
NAND FLASH	128MB		
DDR II	512MB		
(W*H*D)	290mm	*44mm	*270mm
	2.3kg		
	AC100 240V 50~60Hz		
	25W		
	0 45		
	-40 70		
	5% 95%RH		
	5% 95%RH		
EMC	GB/T 9254.1		
	GB 4943.1		
	ESD	6KV	8KV

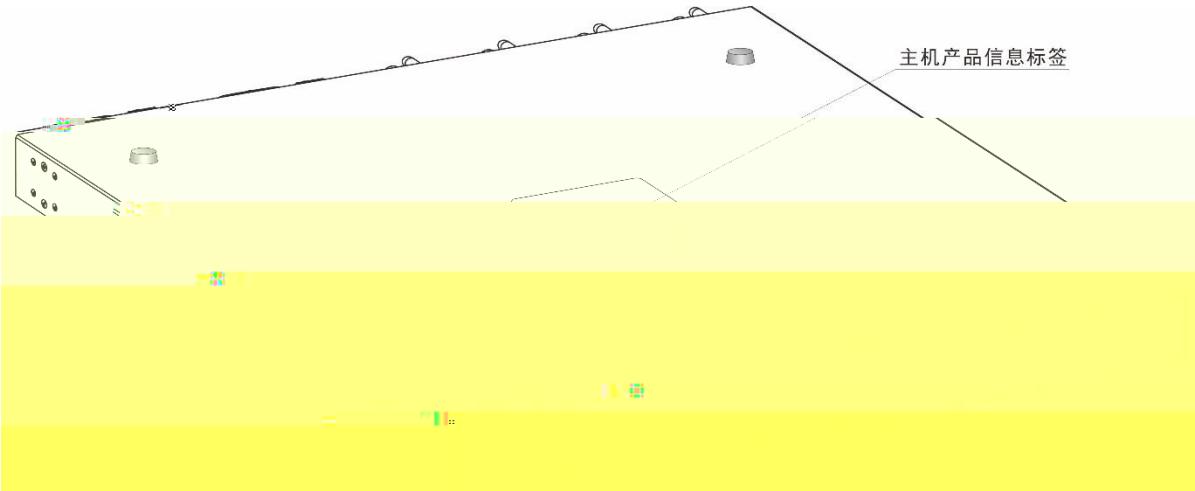



4	3	WAN	,3	WAN	10M/100M/1000M	1	SFP
1	FUNC			RGOS		1	SD USB


1U

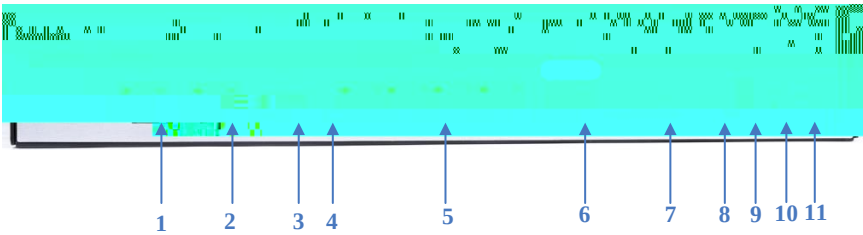

1	GE0/0	RJ45		7	SD	
	10/100M LINK/ACT	(		8	SD	
	1000M LINK/ACT	(		9	USB	
2	GE0/1	RJ45		10	FUNC	
	10/100M LINK/ACT	(		11		USB
	1000M LINK/ACT	(				
3	GE0/2	SFP				
4	GE0/2	SFP				
5	GE1/0--GE1/3	RJ45				
	10/100M LINK/ACT	(				
	1000M LINK/ACT	(				
6	Console					



GE1000M LINK/ACT (	GE1000M LINK/ACT (Link up LINK 10M/100M1000M Link up1000M
SFPLINK/ACT	SFPLINK/ACT :Link up100BASE-FX/1000BASE-X Link up100BASE-FX/1000BASE-X
SD	SDSDSDSDSD

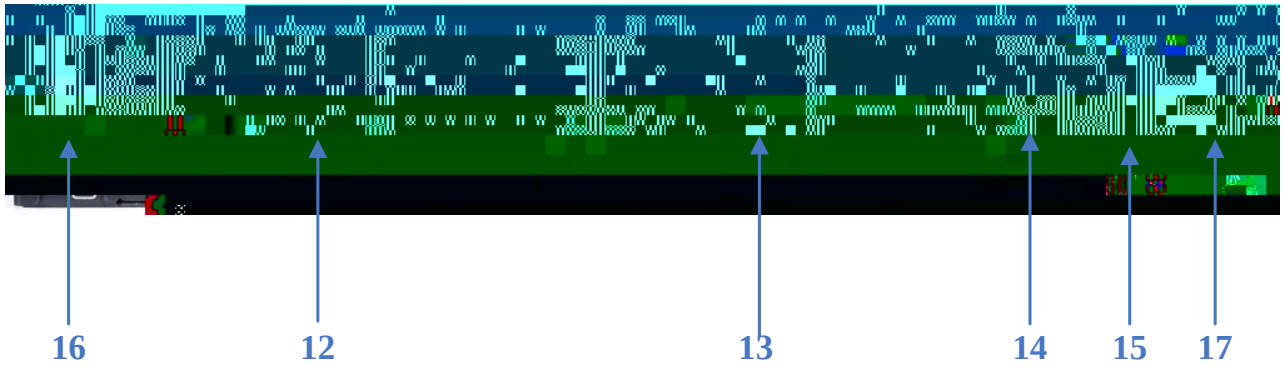

12	SLOT 2	15
13	SLOT 3	16
14		17

EXEC	show slots
------	------------

1.2

RSR10-X-07

1.2.1 console

RSR10-X-07 console

console



	6 10/100/1000Base-T/1000Base-TX;
	IEEE Std 802.3 2008

GE


10/100/1000BASE-T 5E UTP STP 100m

MDI/MDIX

MDI/MIDX

RJ45

1 8

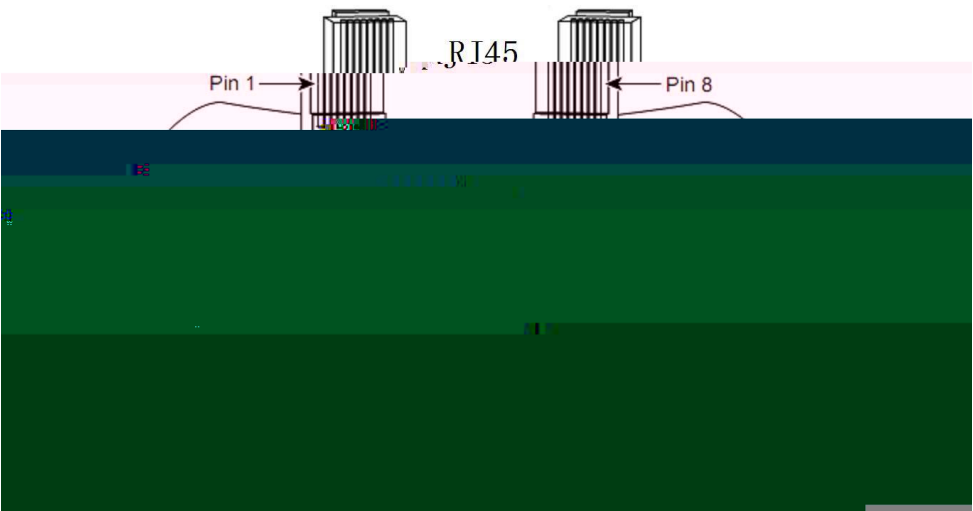

1000BASE-T IEEE 802.3ab 100-ohm 5 UTP STP 100

1000BASE-T

Pin	MDI	MDI-X
1	Media Dependent Interface A+	Media Dependent Interface A+
2	Media Dependent Interface A-	Media Dependent Interface A-
3	Media Dependent Interface B+	Media Dependent Interface B+
4	Media Dependent Interface C+	Media Dependent Interface C+
5	Media Dependent Interface C-	Media Dependent Interface C-
6	Media Dependent Interface B-	Media Dependent Interface B-
7	Media Dependent Interface D+	Media Dependent Interface D+

1000BASE-T

Router	Router	Router	Router
1 MDIA +	1 MDIA +	1 MDIA +	1 MDIA +
2 MDIA -	2 MDIA -	2 MDIA -	2 MDIA -
3 MDIB +	3 MDIB +	3 MDIB +	3 MDIB +
6 MDIB -	6 MDIB -	6 MDIB -	6 MDIB -
4 MDIC +	4 MDIC +	4 MDIC +	4 MDIC +
5 MDIC -	5 MDIC -	5 MDIC -	5 MDIC -
7 MDID +	7 MDID +	7 MDID +	7 MDID +
8 MDID -	8 MDID -	8 MDID -	8 MDID -

100BASE-TX/10BASE-T

100Mbps 100-ohm 5

10Mbps

100-ohm 3 4 5

100

100BASE-TX/10BASE-T

100BASE-TX/10BASE-T

Pin	MDI	MDI-X
1	Output Transmit Data+	Input Receive Data+
2	Output Transmit Data-	Input Receive Data-
3	Input Receive Data+	Output Transmit Data+
6	Input Receive Data-	Output Transmit Data-
4 5 7 8	Not Used	Not Used

100BASE-TX/10BASE-T

100BASE-TX/10BASE-T

Router	Router	Router	Router
1 IRD +	1 OTD +	1 IRD +	1 OTD +
2 IRD -	2 OTD -	2 IRD -	2 OTD -
3 OTD +	3 IRD +	3 OTD +	3 IRD +
6 OTD -	6 IRD -	6 OTD -	

	9/125um	2km	15km
--	---------	-----	------

1.2.4 USB

USB	U	USB	U	USB	USB
	U	USB			

RSR10-X-07	USB	USB
USB		

	USB2.0
	USB Host
	1.5Mbps /12Mbps /480Mbps
	Host

USB	RGOS	“	”	USB
USB	U	U	Kingston	Sandisk
USB	FAT32	FAT32	FAT32	

USB	USB	5
-----	-----	---

1.2.5 SD

SD	SD	SD	SD
SD		SD	

RSR10-X-07	SD	SD
SD		

	SD/SDHC
	SD Connector
	5MB/sec max
	Device
SD	SDHC

SD	FAT32	FAT32	FAT32		
SD		SD	SD	Kingston	Sandisk

U	SD	U	SD	SD	SD
---	----	---	----	----	----

1.3

RSR10-X-07

” ” ō

S

4

Ŧ

SIM

SIM

OPEN


60

SIM

LOCK

SIM

SIM

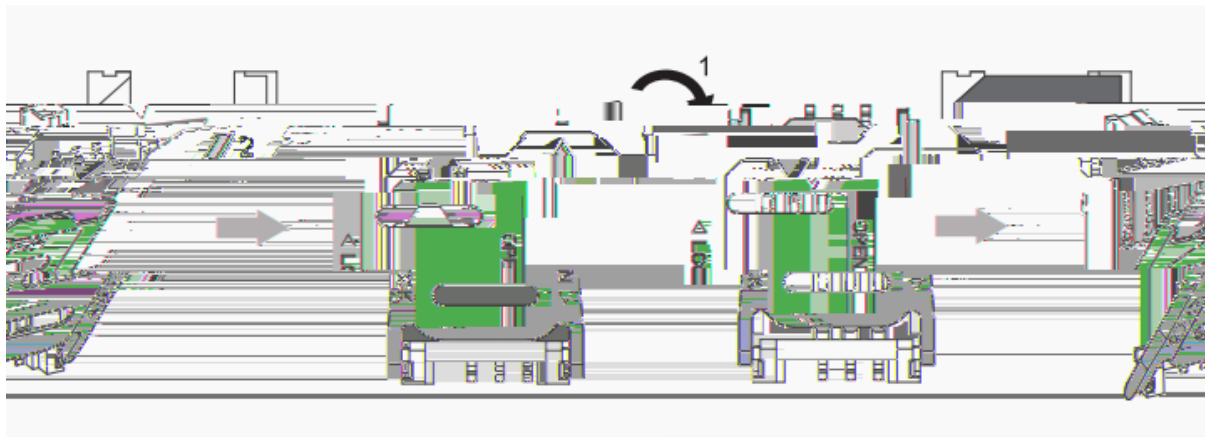

1 HSIC-4G-LTE

2

6.2


ANT0 ANT1

1.3.2 6

DHSIC-6GSW

DHSIC-6GSW 6

DHSIC-6GSW

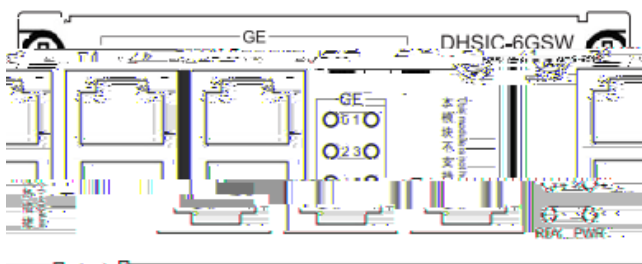

RDY

RJ45

1

Link/ACT Link/ACT

DHSIC-6GSW

PWR	
RDY	
RJ45 Link/ACT	1000Mbps LinkUp 1000Mbps 100M/10Mbps LinkUp 100M/10Mbps

DHSIC-6GSW

OFL

DB9M	RJ45	
1	5	RX Ring
2	4	RX Tip
4	1	TX Tip
5	2	TX Ring

1.3.4 HSIC-5G-NR


HSIC HSIC-5G-NR

HSIC-5G-NR



RDY				
RSSI				
5G	5G	5G	5G	5G
4G	4G	4G	4G	5G
3G	3G	3G	3G	5G


OFL



1.4

1.4.1 RG-PA60

RG-PA60

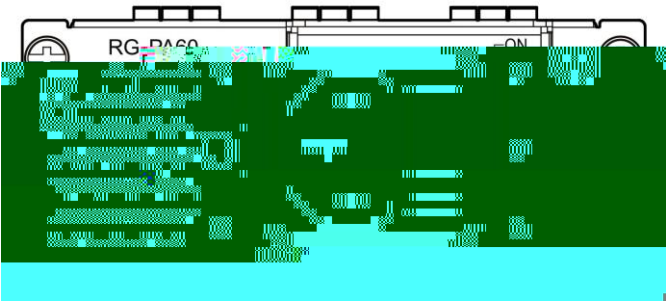

	RG-PA60
	100-240V~ 50-60Hz

1.5.1

RSR10-X-07

RJ45 SFP ARP 802.1Q

 X.25 HDLC PPP SLIP

 TCP/IP IP ICMP IGMP TCP UDP

 IP RIP V1/V2 RIPng OSPF V1/V2/V3

 SNMP

TELNET TELNET

DHCP Server DHCP Client DHCP Relay TFTP

 VRRP

PPPOE

DNS DDNS

 X-MODEM

NAT/NAT-PT ACL AAA

IPSEC L2TP PPTP

 MPLS VPN

1.5.2

1.5.3

1.5.4

DEBUG

SNMP

- 1) Console
- 2) TELNET
- 3)
- 4)

1.5.5

IP

AAA RADIUS

PPP PAP CHAP callback

OSPF RIP V2

NAT

IPSEC/IKE

GRE

VLAN

1.5.6

/

autocommand autocommand

telnet autocommand

tty

TELNET

1.5.7

X-MODEM (Windows XP Windows NT UNIX DOS)

Console

2

2.1

UPS

2.2

/

2.2.1 /

RSR10-X-07

0 ~45

10%~95%

2.2.4

2.2.5

2.2.6

RSR10-X-07

E1/T1

2.2.7

2.3

3

3.1





3.2

3.2.1

RSR 19

RSR10-X-07

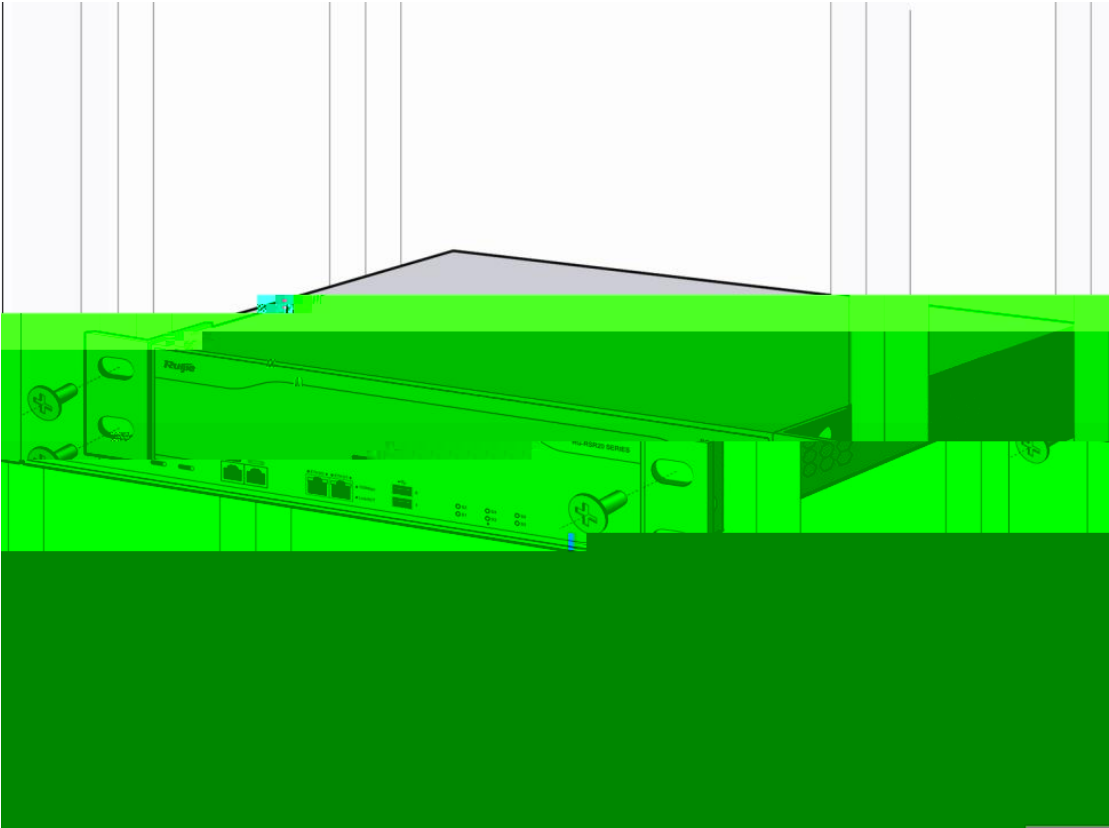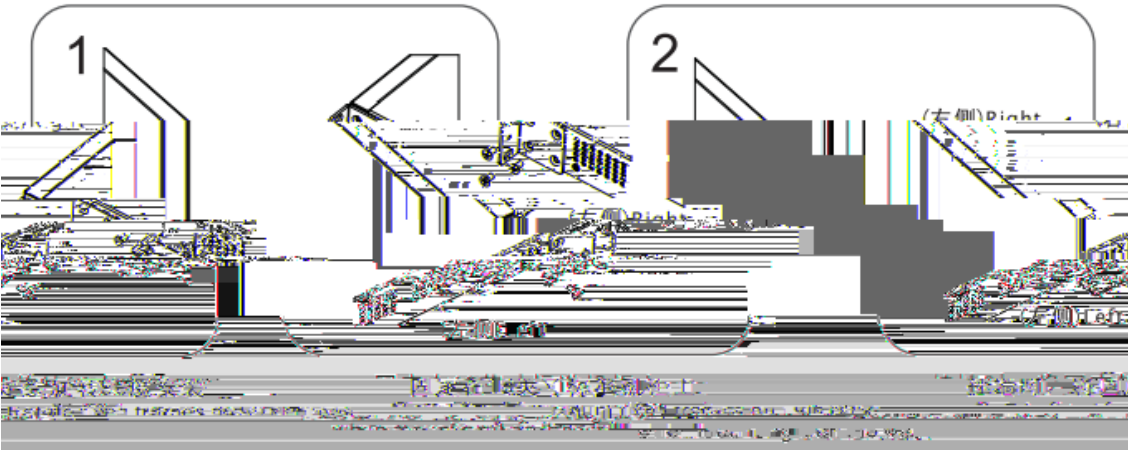

3.2.2

19

10cm

3.2.3

RSR10-X-07

144mm

2

3.3

RSR10-X-07

AC: 100~240V 50-60Hz


“ ”

“ ”

RSR10-X-07


POWER

RSR10-X-07

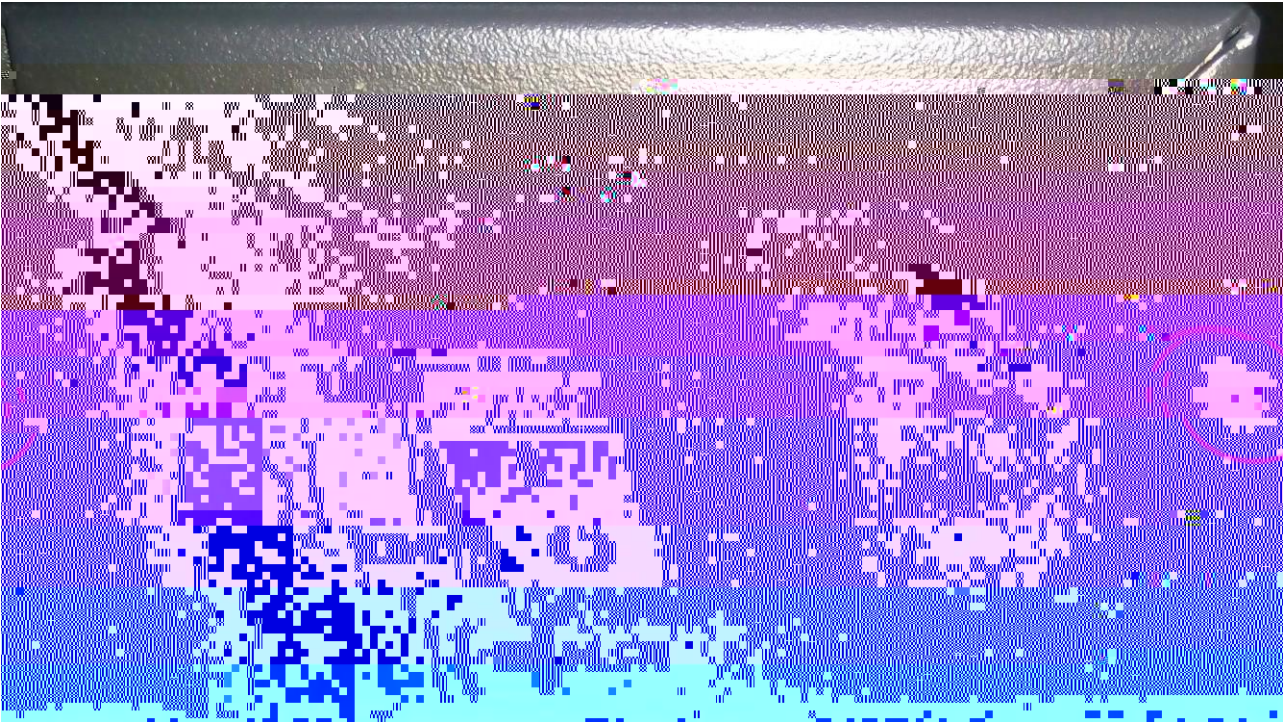

RSR10-X-07



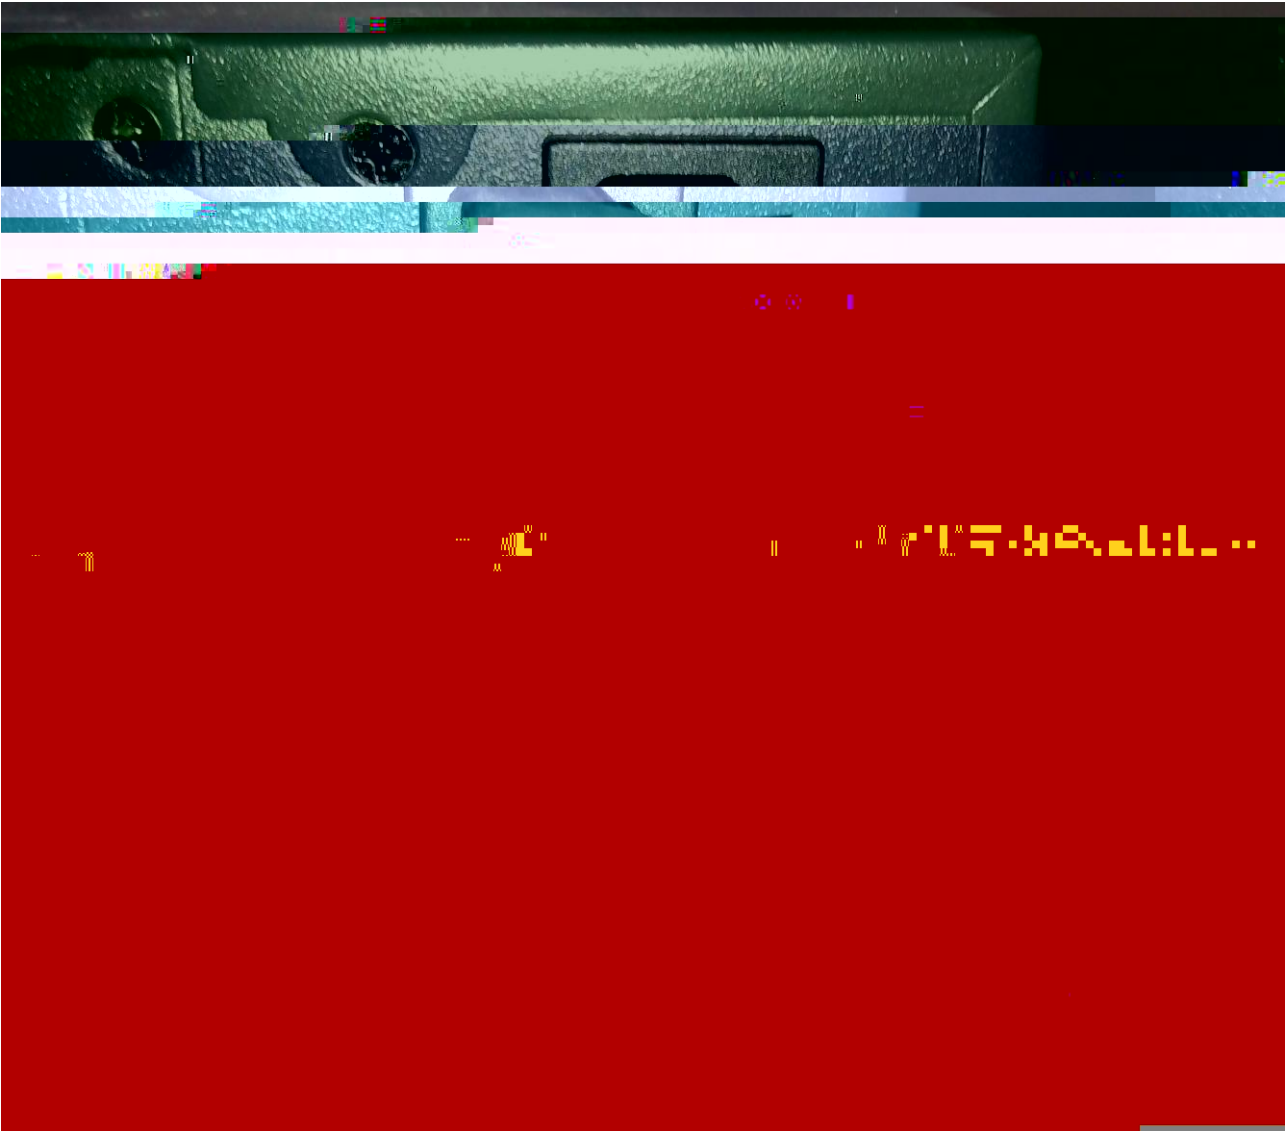

3.4

EIA/TIA-232 Console

	RJ-45
	EIA/TIA-232
	9600bps
	1 2

DB-9

3.5

3.5.1

3.5.2

3.5.3

EXEC

3.6

3.6.1

RSR10-X-07

RG-PA60


3.6.2



RSR10-X-07

4

4.1

4.1.1

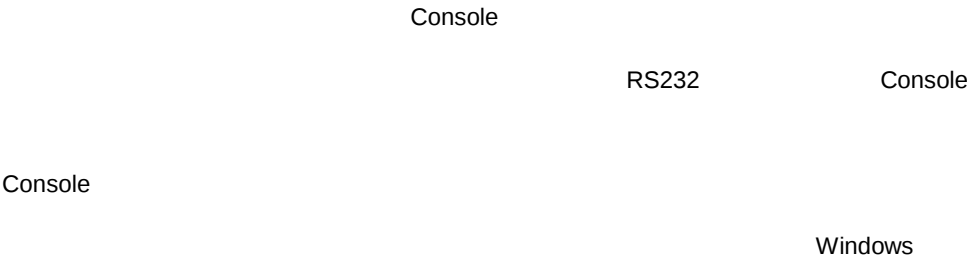

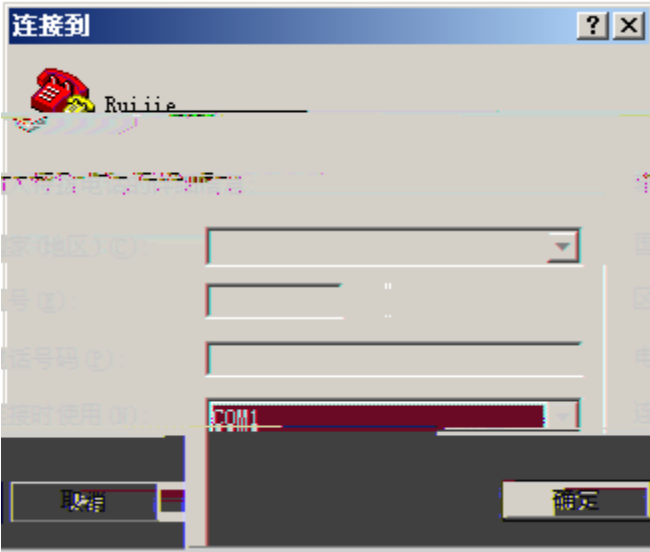



4.1.2

4.1.2.1

4.1.2.2

“ ON ”

4.1.2.3

RSR10-X-07

RSR10-X-07

SYSTEM

4.1.3

```
*****
System bootstrap ...
Boot Version: RGOS 10.3(4), Release(53498)
Nor Flash ID: 0x00010049, SIZE: 2097152Bytes
MTD_DRIVER-5-MTD_NAND_FOUND: 1 NAND chips(chip size : 33554432) detected
MTD_DRIVER-5-MTD_NAND_FOUND: 1 nand chip(s) found on the target.
Press Ctrl+C to enter Boot Menu .....
Main Program File Name rgos.bin, Load Main Program ...

Executing program, launch at: 0x00010000
Ruijie General Operating System Software
Release Software (tm), RGOS 10.3(4), Release(53498), Compiled Fri Apr  3 08:45:59 CST 2009 by ngcf31

Copyright (c) 1998-2009 by Ruijie Networks.
All Rights Reserved.
Decompiling or Reverse Engineering is Not Allowed.

00:00:00:00: %MTD_DRIVER-5-MTD_NAND_FOUND: 1 NAND chips(chip size : 33554432) detected
00:00:00:00: %MTD_DRIVER-5-MTD_NAND_FOUND: 1 nand chip(s) found on the target.
00:00:00:17: %LINK-5-CHANGED: Interface FastEthernet 0/1, changed state to up
00:00:00:17: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet 0/1, changed state to up
00:00:00:17: %LINK-5-CHANGED: Interface FastEthernet 0/0, changed state to up
00:00:00:17: %LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet 0/0, changed state to up
00:00:00:31: %SYS-5-COLDSTART: System coldstart.

Ruijie>
Ruijie>
```

Ruijie>

Ruijie>

Ruijie>

4.2

6


6.1

6.1.1 E1

E1 E1 Modem

6.1.1.1 DB9F E1/CE1 Modem

- 1)
- 2)
- 3)



V-03260037-000 CAB-E1 balanced/DB9M-RJ45M/120 ohm/3m