

RG-WG

WebGuard

1		3
		3
		3
		4
2		4
3		5
		5
		2
4		2
		2
		3
		3
5		4
		4
5.1.1	Console	5
5.1.2	WEBUI	8
5.1.3	SSH	10
		13
		14
5.1.4	CLI	15
5.1.5	WEBUI	16
		17
DNS		18
		18
		19
		21
6		23

1

WegGuard (RG-WG) WEB HTTP/HTTPS
WEB


<http://www.ruijie.com.cn>

4008111000

2

WebGuard

WebGuard

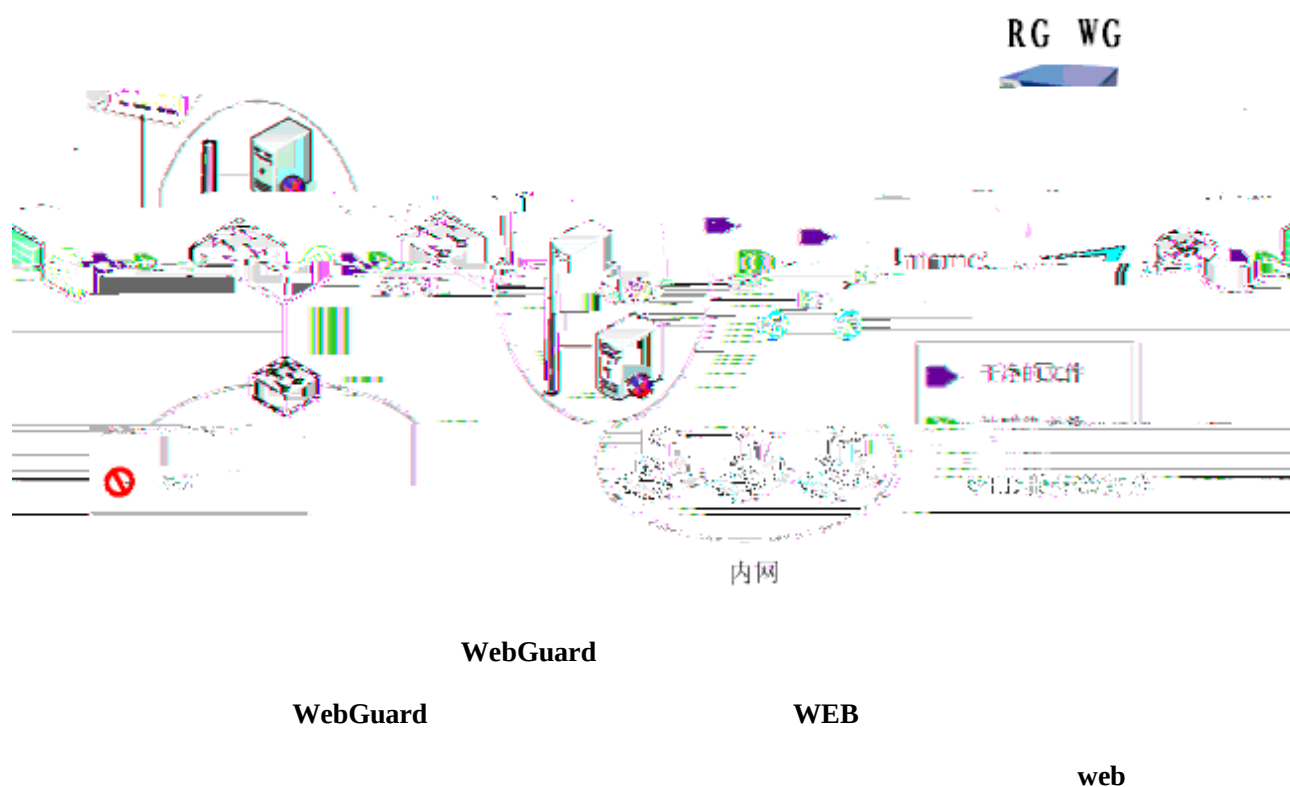

3

PWR

VLAN 1 eth0

eth0 VLAN1 WEBUI
WEBUI CLI IP

1

IP 192.168.20.200

Administrator

Password

English

Ruijie

Eth0

Eth0 HTTPS SSH ping

default-security-rule



WebGuard


5

CLI WEBUI

WG

CONSOLE WG


A HTTPS

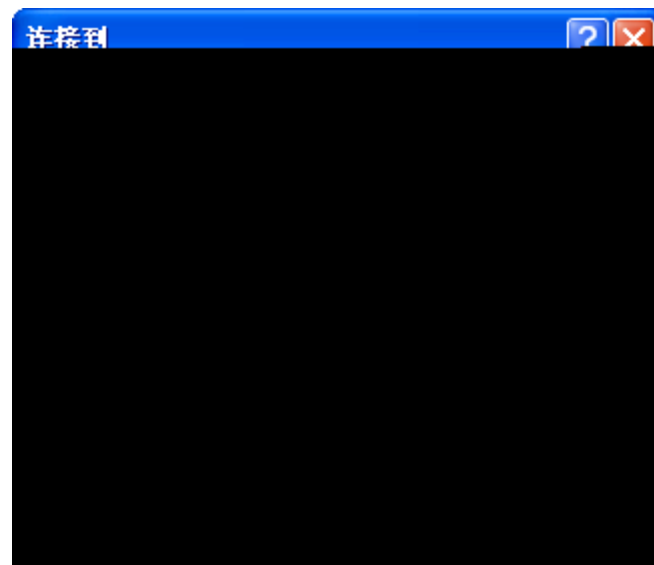

C 9600 8 1



RG-WG

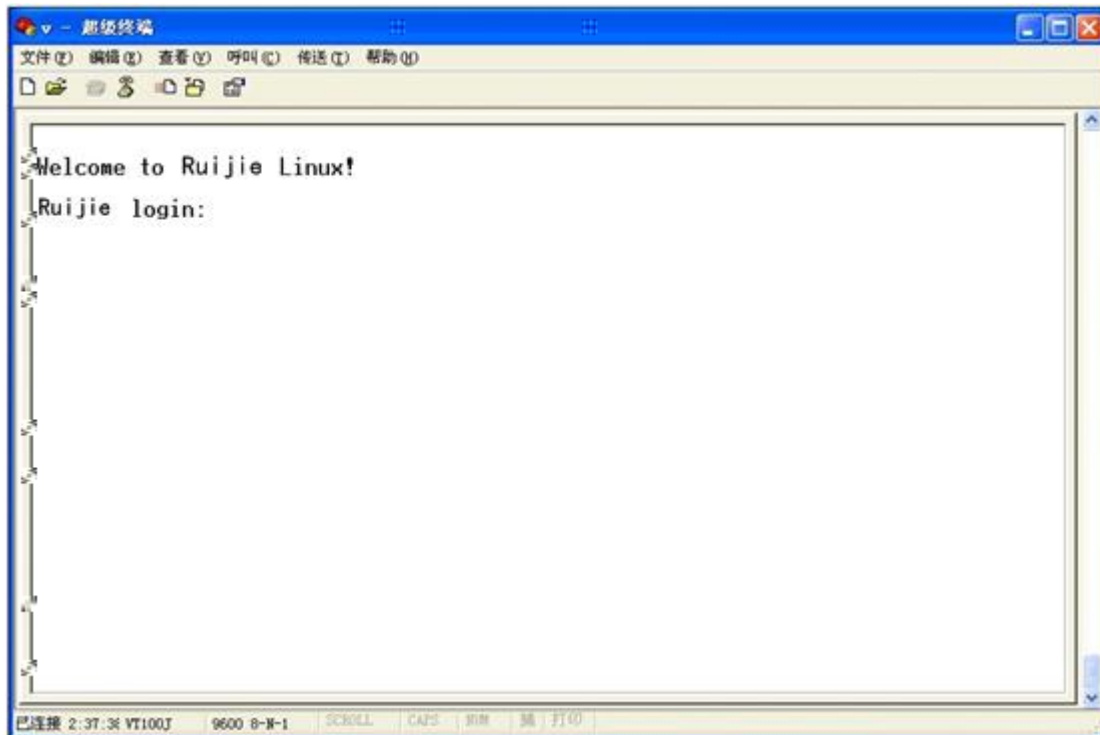


3

WG-WG

administrator


password

RG-WG

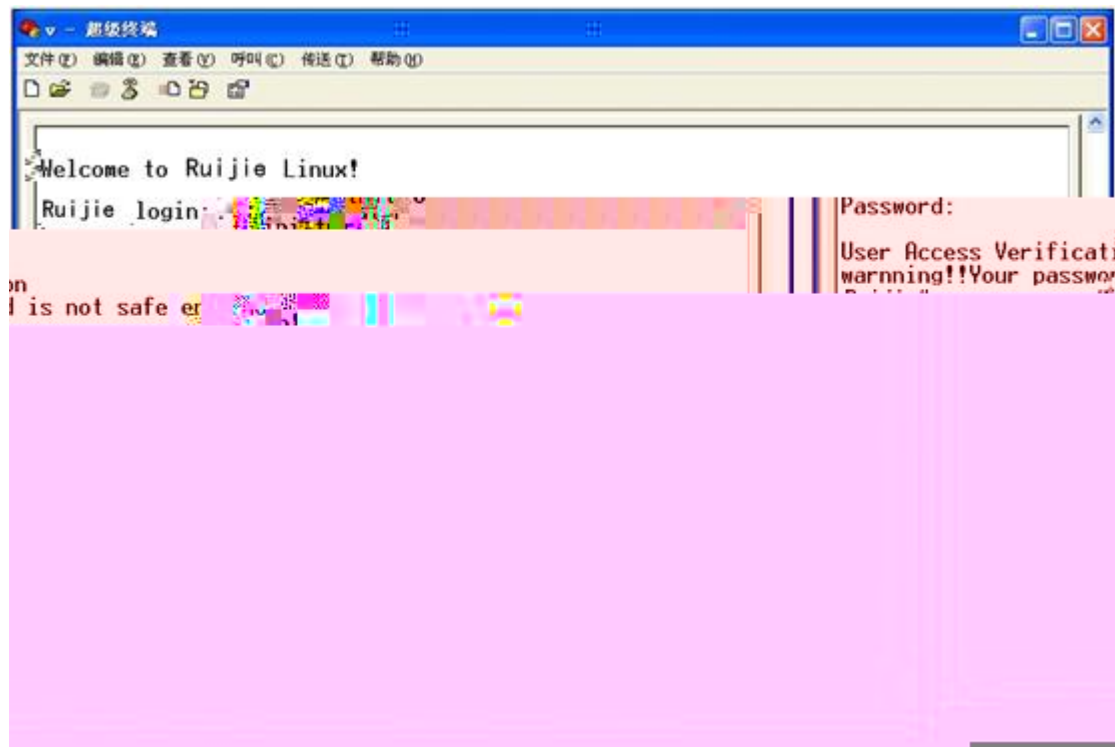

5.1.2 WEBUI

RG-WG		HTTPS	
RG-WG			
Internet Explorer 6.0		6.0	
Firefox 1.50		1.50	
WG		WEBUI	
1	WEB		
https://<Ruijie_gateway_ip_address>			
VLAN1	IP	192.168.20.200/24	Console
	IP	IP	VLAN1 IP
eth0			
2	WEBUI		

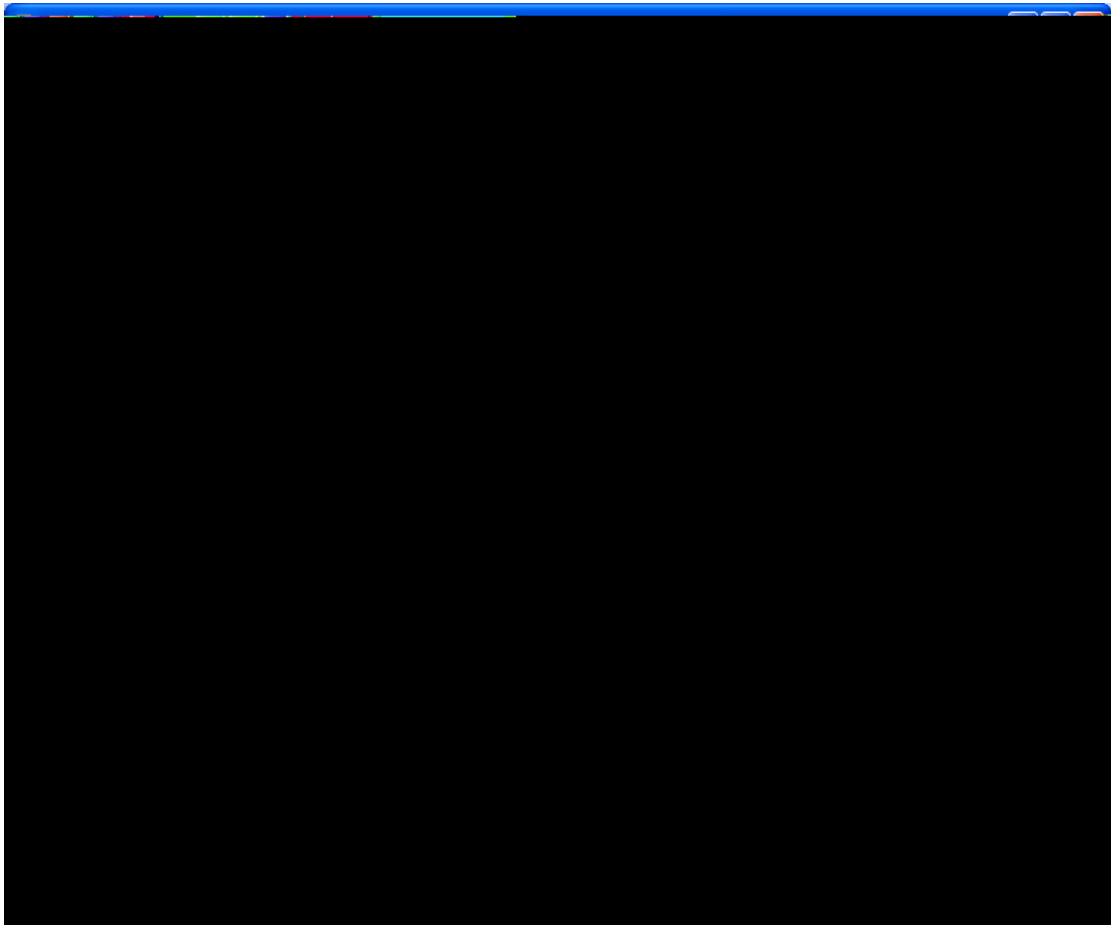

administrator

password

WEBUI

>

>

WEBUI



5.1.3 SSH

SSH Secure Shell

SSH

SSH

SSH

SSH

WG

SSH

SSH

SSH

UNIX

OpenSSH

32

WINDOWS

PUTTY

WG

WG

SSH

SSH

WG

WG

SSH

WG

SSH

SSH

SSH

eth0

eth0

SSH

eth0

SSH

eth0

#show interface eth0 manage<cr>

HTTPS

SSH

PING

eth0

HTTPS

SSH

ping

SSH

SSH

eth2

SSH

CLI


#set interface eth2 manage ssh

WEBUI

1

>

>

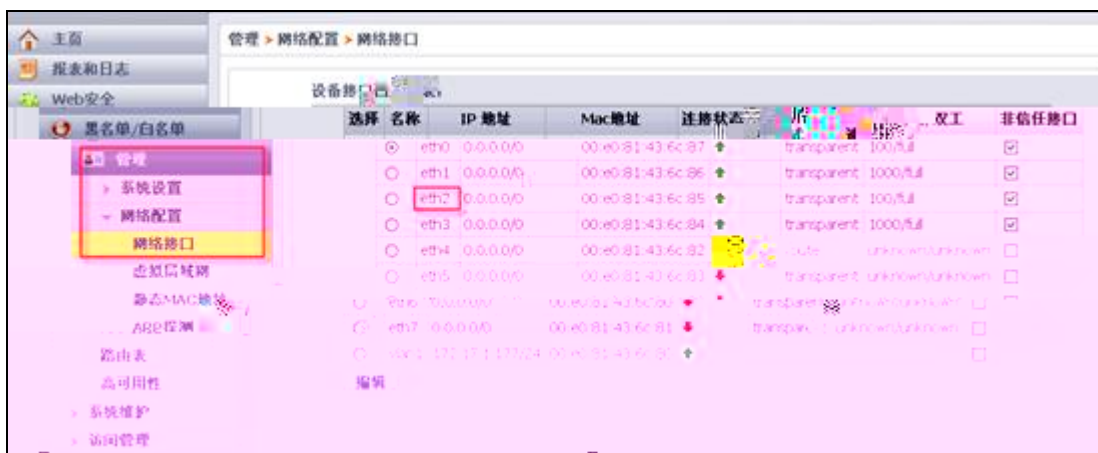

2

eth2

eth2



SSH

SSH

SSH

PuTTY OpenSSH


SSH

PUTTY

SSH

1

Putty.exe

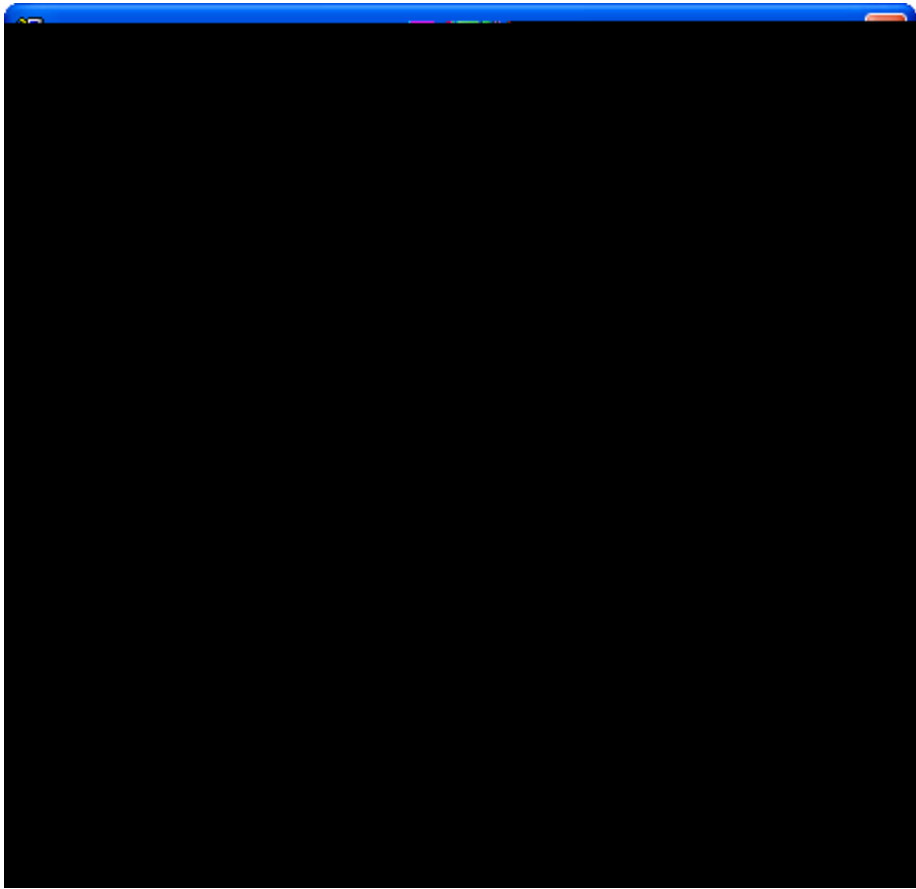


2

Host Name	or IP address	SSH	IP	port
	22			
connection type		SSH		
	saved session		save	
		load		SSH

3

Open SSH



administrator

CLI

#set admin administrator password 123456

WEBUI

1 > > administrator

VLAN IP VLAN1 IP unset interface vlan1<cr>

VLAN IP SSH SSH

CLI

4 HTTPS SSH

HTTPS SSH eth2

HTTPS set interface eth2 manage https

HTTPS unset interface eth2 manage https

SSH set interface eth2 manage ssh

SSH un

管理 > 网络配置 > 网络接口

vlan1

IP地址/子网掩码

管理 > 网络配置 > 路由表

添加新的路由记录:

添加为默认网关 ☒

网关

VLAN

2

DNS

WebGuard

DNS

>

>

DNS

首选DNS服务器	202.106.0.20
备选DNS服务器	

>

Web安全 > 安全访问规则

添加安全访问规则

安全访问规则名: (最多32字节)

☒ 启用扩展SQL注入攻击检查

动作: 仅记日志

☒ 启用扩展跨站脚本攻击检查

动作: 仅记日志

☒ 启用扩展命令注入攻击检查

动作: 仅记日志

☐ 启用Web目录内容泄露检查

动作: 阻止并记日志

☐ 启用Web程序代码泄露检查

动作: 阻止并记日志

☒ 启用危险文件类型下载检查

动作: 阻止并记日志

☒ 启用危险文件类型上传检查

动作: 阻止并记日志

☐ 启用IP访问限制

动作: 阻止并记日志

☐ 启用禁用词过滤

动作: 阻止并记日志


取消

应用

后退

3

1 WEB >



翻到

删除

编号

IP/掩码

协议:端口

IP/掩码

协议:端口

☒ HTTP

☐ HTTPS

80

443

添加

翻到

虚拟主机域名列表

IP/掩码

域名

协议:端口

☒ HTTP

☐ HTTPS

80

443

添加

WEB IP

WWW

WEB IP

4

default-security-rule WEB

5

6

License

WG

