

RG-W100k

V1.0

©2017

7 × 24

<http://www.ruijie.com.cn/>

<http://webchat.ruijie.com.cn>

<http://www.ruijie.com.cn/service.aspx>

4008-111-000

<http://bbs.ruijie.com.cn>

service@ruijie.com.cn

1			5
2			5
3			7
4			9
4.1	Agent		9
4.2			11
4.3			12
5			

1



2

RG-Wlock

Web

1

1800

2

3


windows

1802

1810


Windows

TCP1800 UDP514
TCP1810 TCP 1802

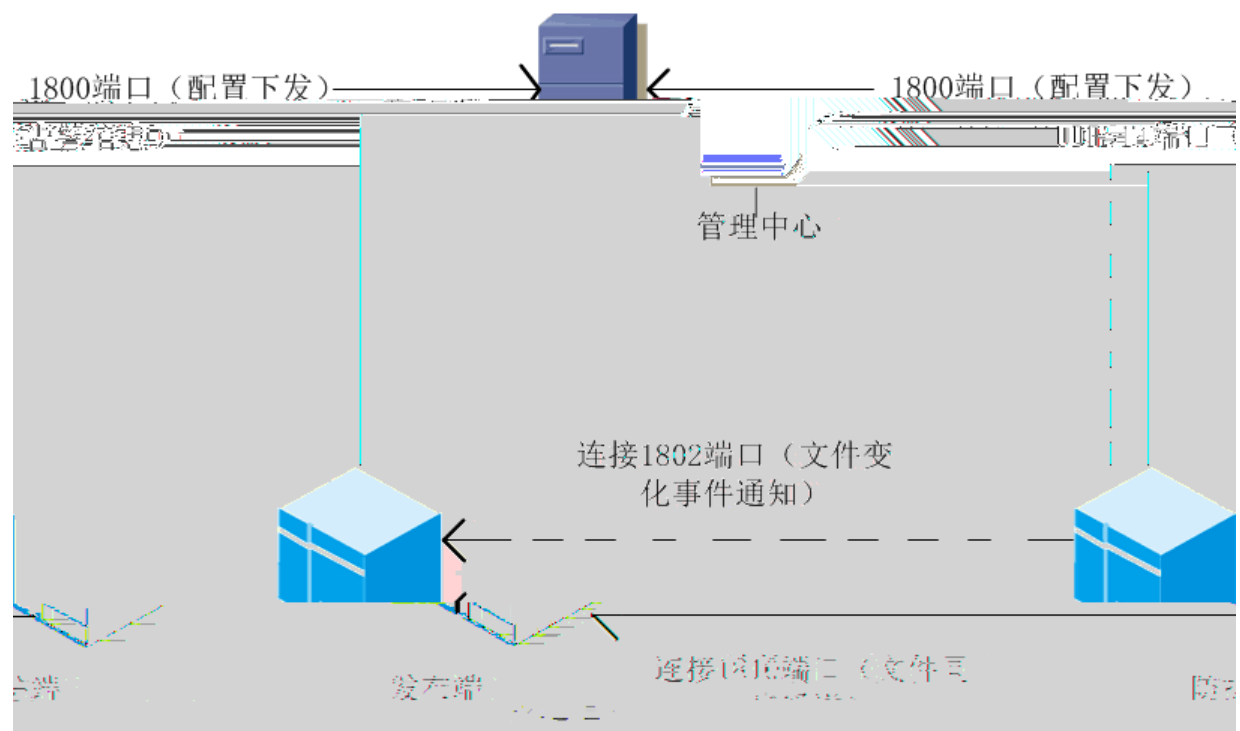

Linux

TCP1800 UDP514
TCP1800 TCP 1081

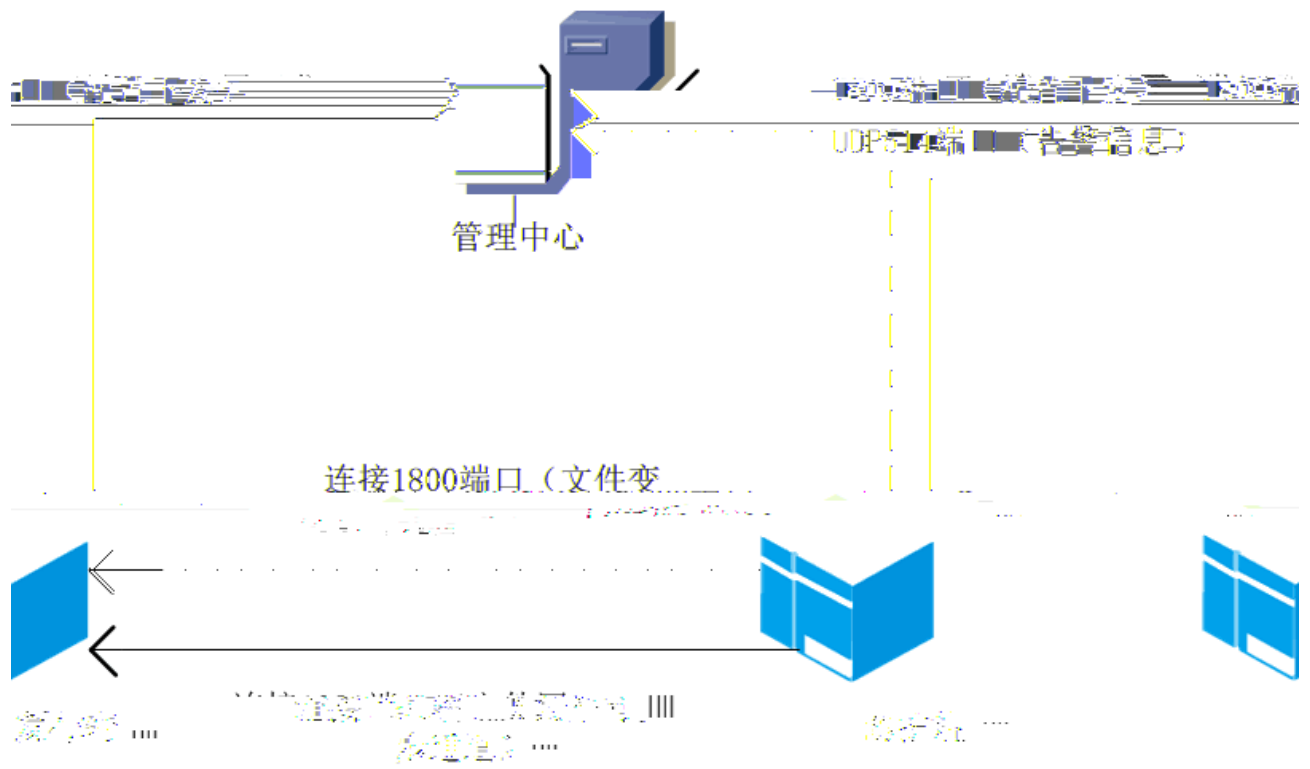

3

1 windows
 2 windows server 2003/2008 32/64 Windows xp 32/64 Windows
 7 32/64 windows server 2012 64
 1G CPU: I3

1
 360
 2 Wlock VC++2008 PostgreSQL
 3 PostgreSQL PostgreSQL

1 .exe



2



3

4

5 `https://127.0.0.1:1880`


`https://` IP 1880

6

admin admin
audit audit@ruijie1970

4

1.

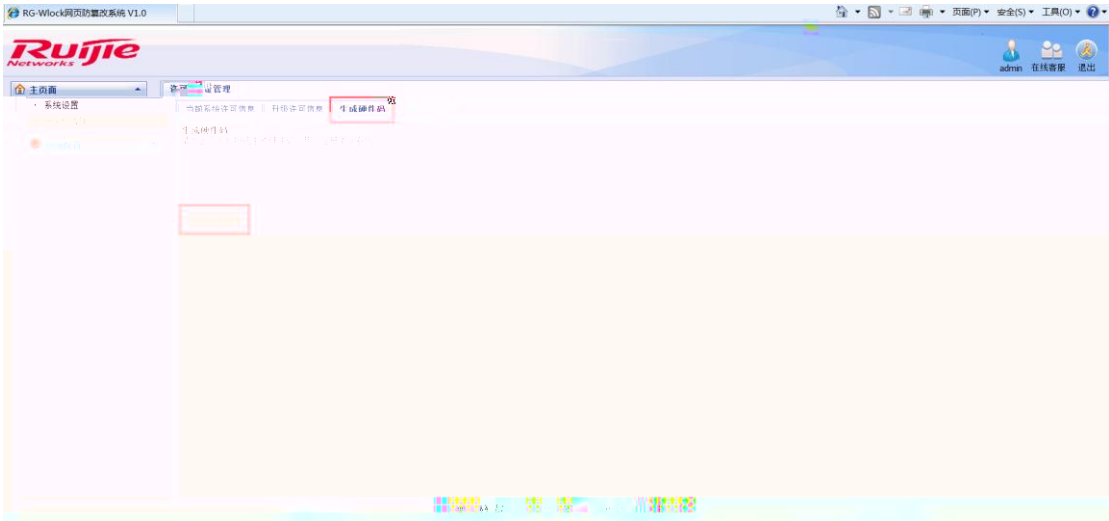

2.

4.1 Agent

WEB

WEB

4.1.1

Windows

Windows

Windows 2003 32	Windows 2008/Windows 2012	64
Windows 2003	Windows 2008/Windows 2012	64

Linux

Linux

Centos/Red hat/Debian/Ubuntu 32

64


1G

CPU:

I3

4.1.2

->



4-1-1

4.1.3 Windows


wkas.exe

WEB

wkas.exe

IP

-> ->WKAS->



IP

1800/tcp

4.3.1

WEB
WAF

4.3.2

WEB

4.3.3

->

刷新

增加

编辑

删除


	Web名称	IP地址	操作系统类型	是否启用	记录日志
引用					
	test-www.test.com	192.168.1.1	Windows	否	否
手工添加					
	webray	192.168.226.1	Linux	是	是

4-3-1


4.3.4

->

->

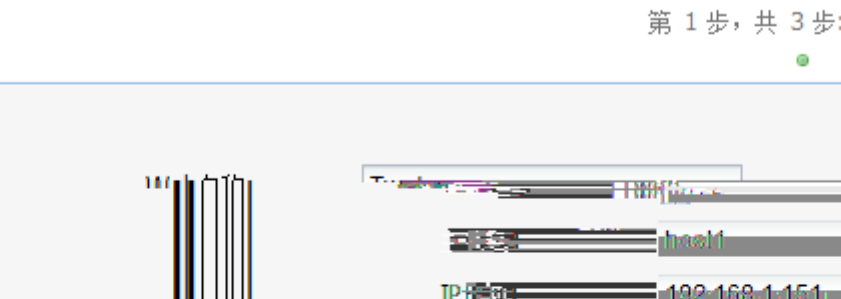

3-2-2

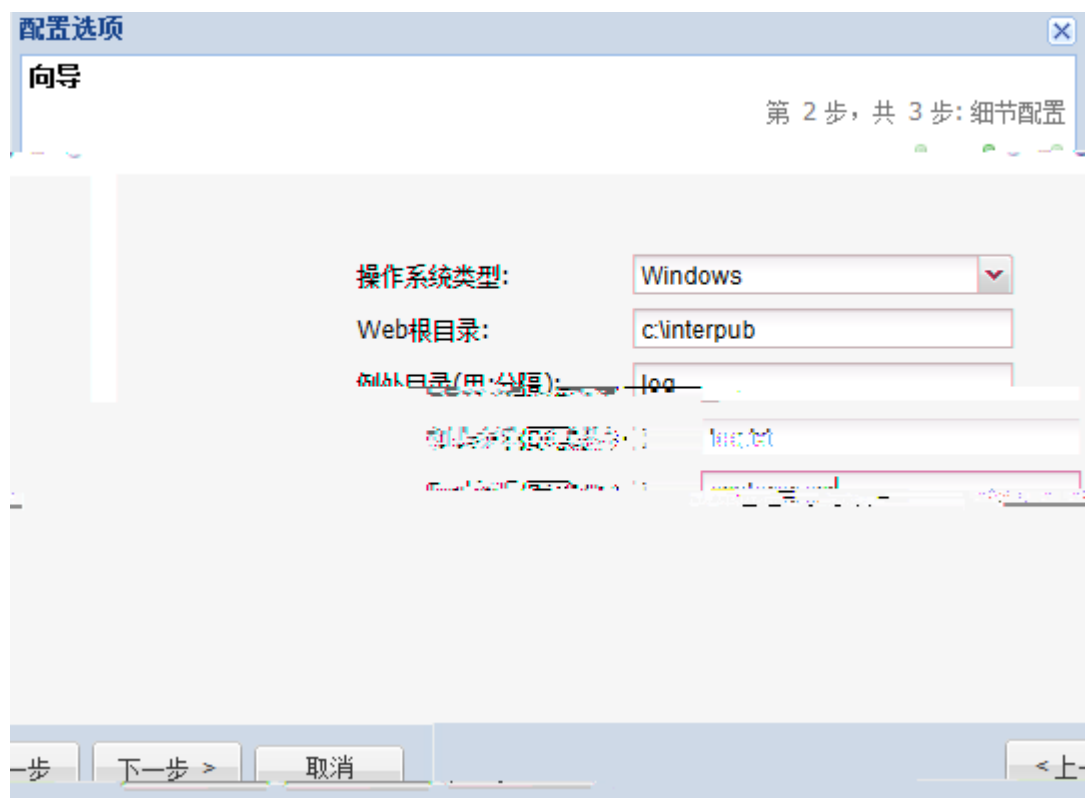

4-3-3

Web
 IP WEB IP
 Windows Linux
 Web WEB
 Web

.txt;.exe
 WEB




(1)

2

4.3.5

-> ->

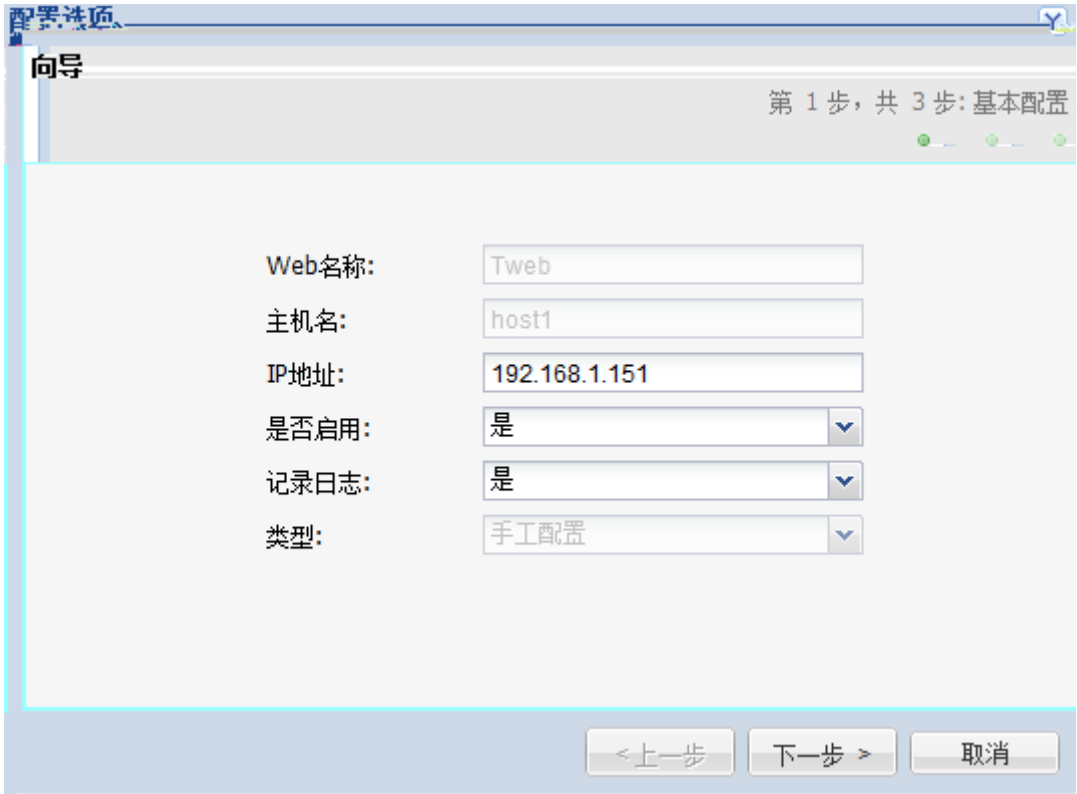

向导 第 1 步, 共 3 步: 基本配置

Web名称: Tweb

主机名: host1

IP地址: 192.168.1.151


是否启用: 是

记录日志: 是

类型: 手工配置

< 上一步 下一步 > 取消

4-3-4

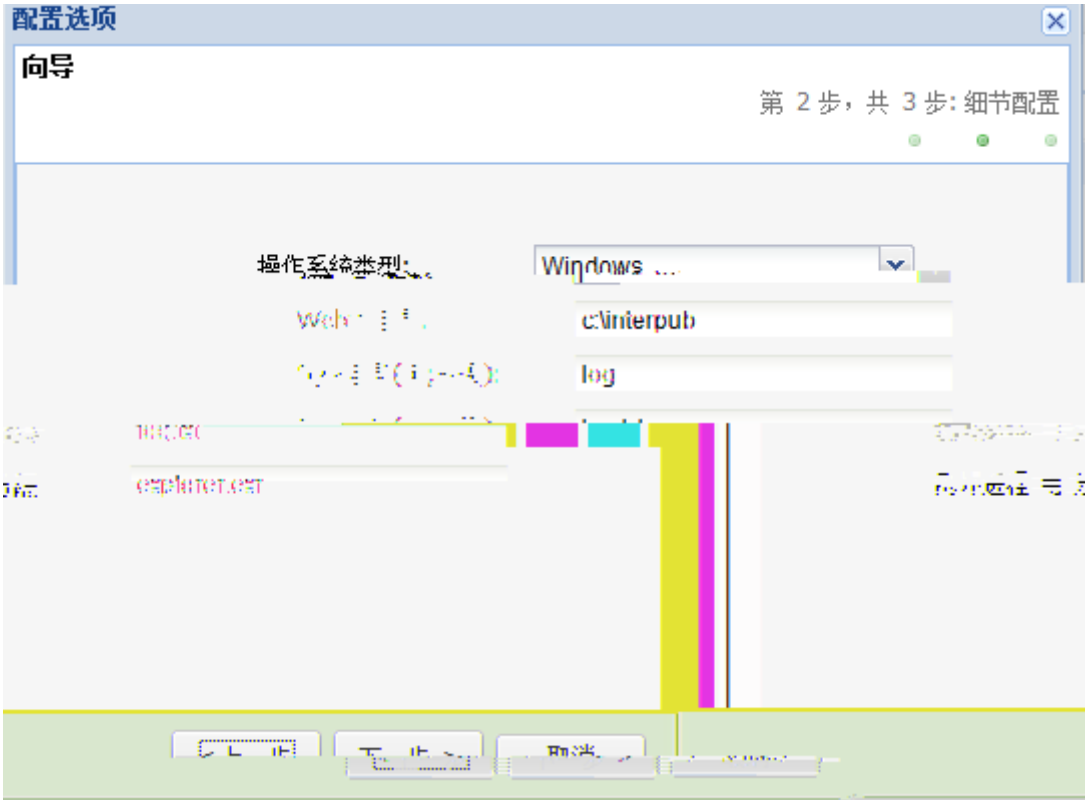

向导 第 2 步, 共 3 步: 细节配置

操作系统类型: Windows ...

Web 路径: c:\interpub

日志路径 (可选): log

< 上一步 下一步 > 取消

4-3-5

配置选项

向导

第 3 步，共 3 步：发布服务器配置

启用发布服务器：☒

发布服务器：

< 上一步 完成 取消

4-3-6




IP

IP

4.3.6

4.3.8



IP

IP

30

Port


wkds

1800

Timepoint

4.3.9


->

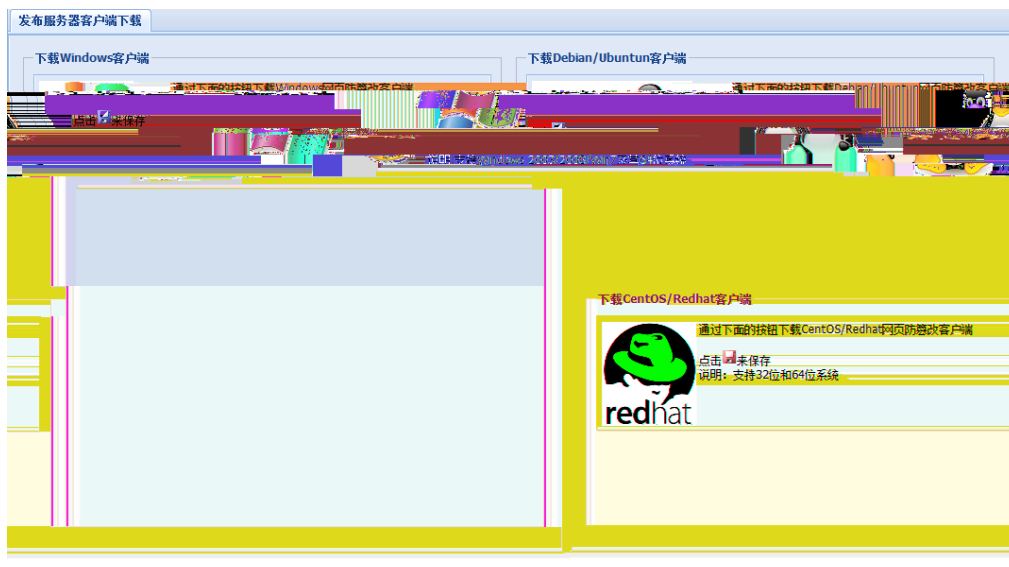

4-3-8


4.3.10

->

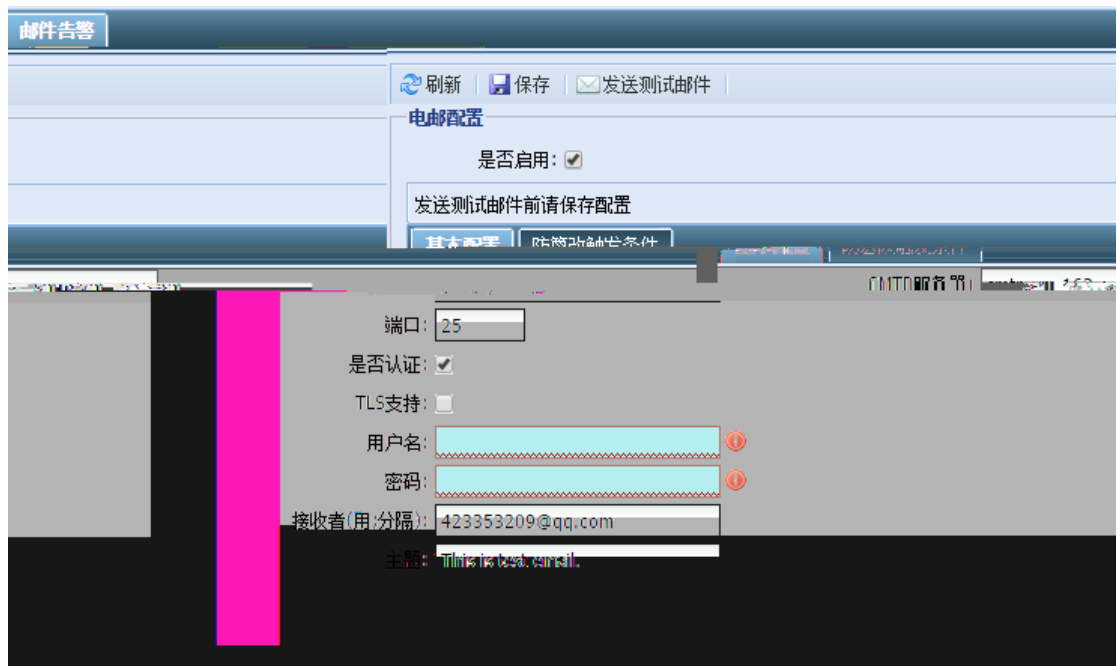

5.2.

DNS

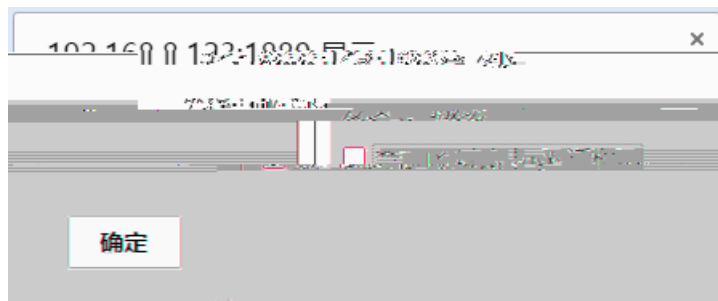

5.3.

5.3.1.



5.3.2.



6.3

RG-Wlock