

RG-eLog 8) zř

RG-eLog_2.40_Build20230913 xE

利

copyright © 2024 iHÀ

+ĈĈĈĈ

ÈHÀp k~%yyKÊBßÄgÖd

စစ်ဆေးမှုအတွက် ၁၉၈၉ ခုနှစ်



١٣٤٥ هـ

三

Ó ñ Æ 1 D } o Æ ê Ô Å ^ · | Æ ` c y Ú . ³ Ø k î † T B ä ê ¶ B D } o Æ ê Ô Å U
 " Ó Æ 1 ê ... 8 \$ Ä o z " ³ c P Ä ³ k i H à ì + î † Ä ÿ ~ ¢ P ê ó P Ò c ê ' š o z

$$9D\hat{U} = k\hat{U} \hat{U}^* = 6P\hat{U}$$

+ Äg'w'óž

BE-01HIGUkxwG'

žmĕpĕbž

Ø W

~ À * Š

Î ô Æ ` ç K t f -

z ÌW

z Ø

z à

W

z iHà <https://www.ruijie.com.cn>

z iHè <https://www.ruijie.com.cn/fw/>

z iHà 7*24h 4Uy <https://ocs.ruijie.com.cn>

z iHà 7*24h 4008-111-000

z iHè 4i:Æ <https://www.ruijie.com.cn/special/fw/tool/xryf/>

z iHè FØ ý 4008111000@ruijie.com.cn

z iHè 4FØ doc@ruijie.com.cn



iHè

iHè

4i:Æ APP

T,

1. ^ | x ^

Î 0 J _ _ l) ö ° Û n P " q • i • ¥ Ô ð h P ª • k ? ö ° P # ò y

•

nPM- ož+õ k hñw4yõ k kõk-
õ ož

! Aè

>þ+mNIF>ð%7328*kgLAê.

! E

>þ+mNIF>ð%7328*õg~L73L

i B*D

+Æ+iD=/p1>ðP28*HDð

✓ ý /(-be7ð

+(-be7ð B*D>

2. *y f*

ÎôÆ J P Bă'ÎgòD}°Zo•T o•€M•°o÷^ μ^hN^@đkÀ}'Î¬Y Ž... D
}ÍÎ Œ ož

ù ¢

ù ^	1
1 "	1
2 xÕ	1
2.1 FÕ	1
2.1.1 4â	1
2.1.2 Mâ	3
2.2 xÕ	3
2.2.1 Õ	3
2.2.2 qkÕ	3
3 CentOSqk	3
3.1 Centos7x5â	3
3.1.1 %5 o	3
3.1.2 85 xvi	4
3.1.3 5 8oMð-	5
3.1.4 5 #ž	6
3.1.5 ‡5 Fâ	7
3.1.6 5 ã q /boot 500M	8
3.1.7 5 ė / 100GB	9

4.1.1	%5	yN		16
4.1.2	%5	n		17
4.2	x	RG-eLog		18
4.2.1	%5	â md5>		18
4.2.2	%5	\$		18
4.2.3	%5	gx		18
4.3	©Få			19
4.3.1	©Få			19
4.3.2	W%Å			20
4.3.3	Iq			20
4.3.4	Uå			23
5	RG-eLog3ú			23
5.1	%5	SSH£		24
5.2	%5	g3ú		24
5.3	%5	3éð		24

1 1

ЩСРă	1'	ЩС-
Щї	centos 7.9 64y	
МЩ	200 M/s Y	

$$^a \text{ ' u } \tilde{\text{A}}^- \text{ _P } + \text{ x } \tilde{\text{Z}}^- \tilde{\text{n}} + \text{syslog}$$

§ Ž Đ Đ P c P š d	1 ´	Š j V „ Đ) § —
0~5000 Syslog N µ — Ö f<300 V	CPU y 8 þ Ä y 16GB M & y c ´ 6TB Y	u 4
5000~10000 Syslog N µ — Ö f<3000 V	CPU y 24 þ Ä y 40GB M & y c ´ 15TB Y	u 4
10000~20000 Syslog N µ — Ö f<8000 V	CPU y 32 þ Ä y 64GB M & y c ´ 30TB Y	u 4
à *	® à *	
q • © Ĩ	centos 7.	


500

- 22.5 GB + 1000000 URLs 22GB 1_24EP%U 1.5 NAT 8T 20% 180

#0/0%

Install CentOS 7 k 0 £ 3-1y


¢ 3-1 n Û„

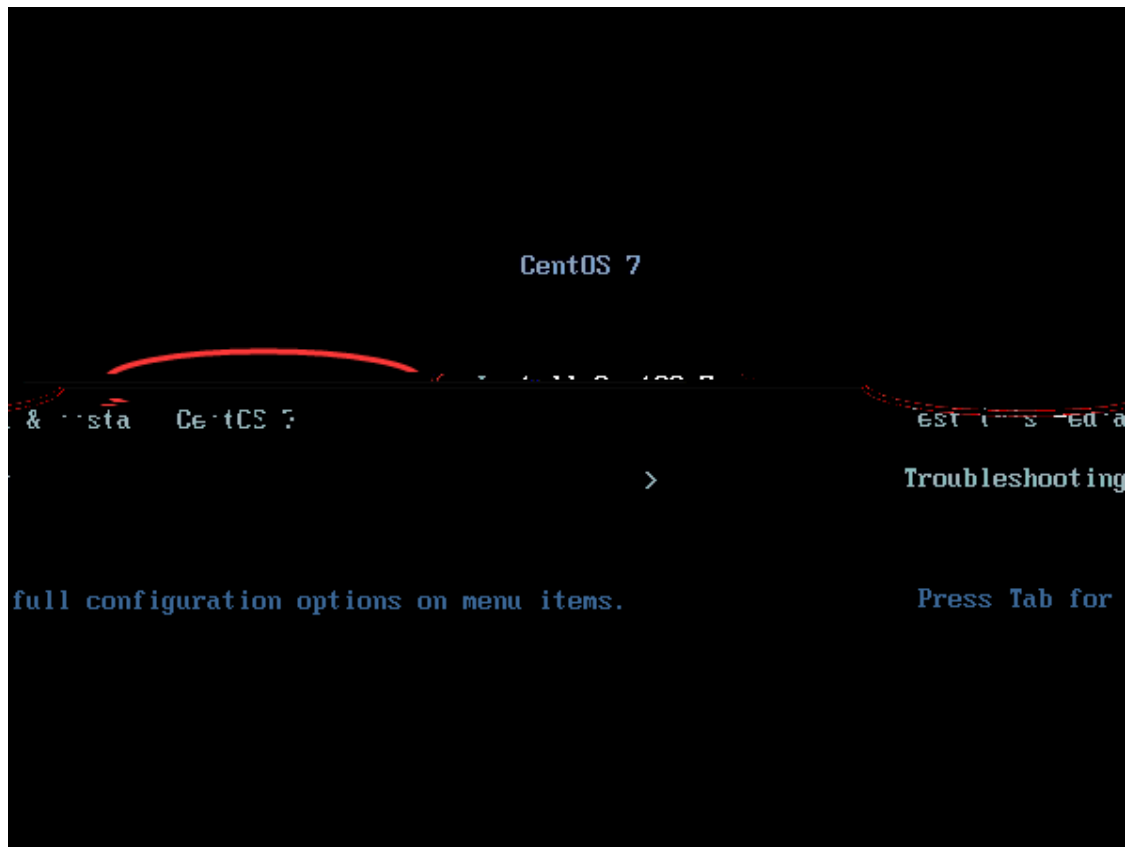

3.1.2 U7 á´ G W8

7 › ñ k • ÷ © Ĭ x ož

图 3-2 安装语言选择

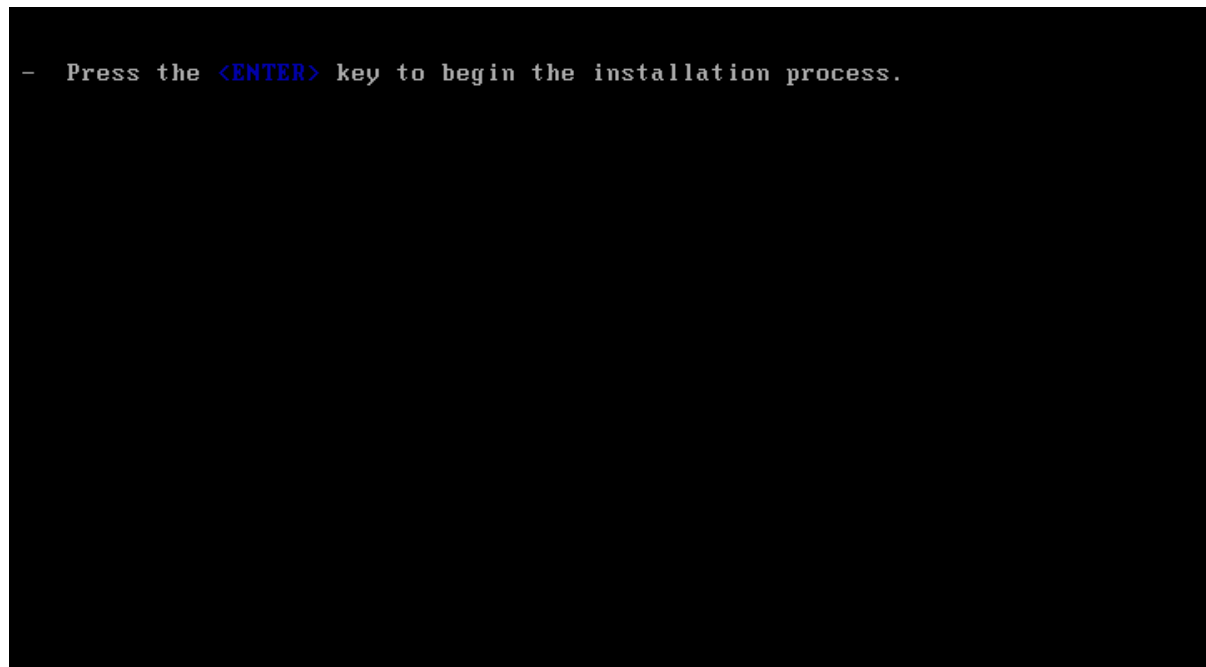

3.1.3 安装语言选择

在 CentOS 7 安装过程中，用户可以选择安装语言。默认语言为英语（us）。用户可以通过按下 **Tab** 键来查看并选择其他语言。

图 3-3 安装语言选择




⚠ 警告
zh_CN.utf8 • 1\lÜ ,B- "x ?>á \$ o >

3.1.4 U™ ò •

(1) 1k6 6kž

¢ 3-4 z « x • N ò •

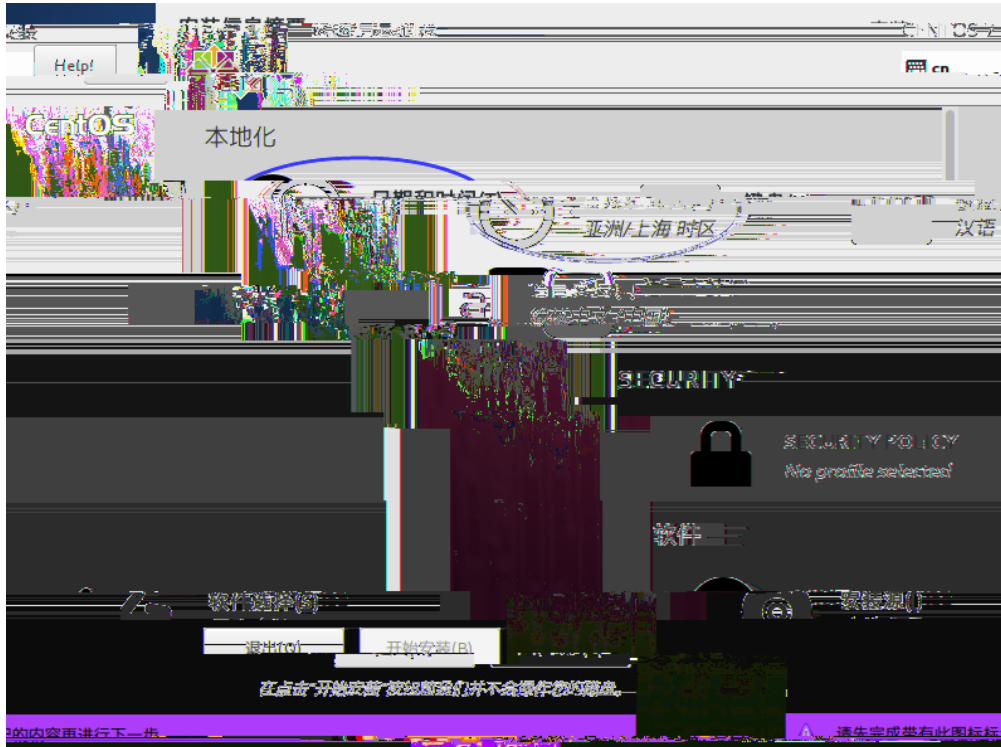

(2) 6 " = T / b " k6 3-5y

图 3-5



3.1.5 网络配置


(1) 配置网络

图 3-6




(2) 配置网络

图 3-7 分区方案



(3) 单击“完成”按钮，完成分区。


图 3-8 安装选项

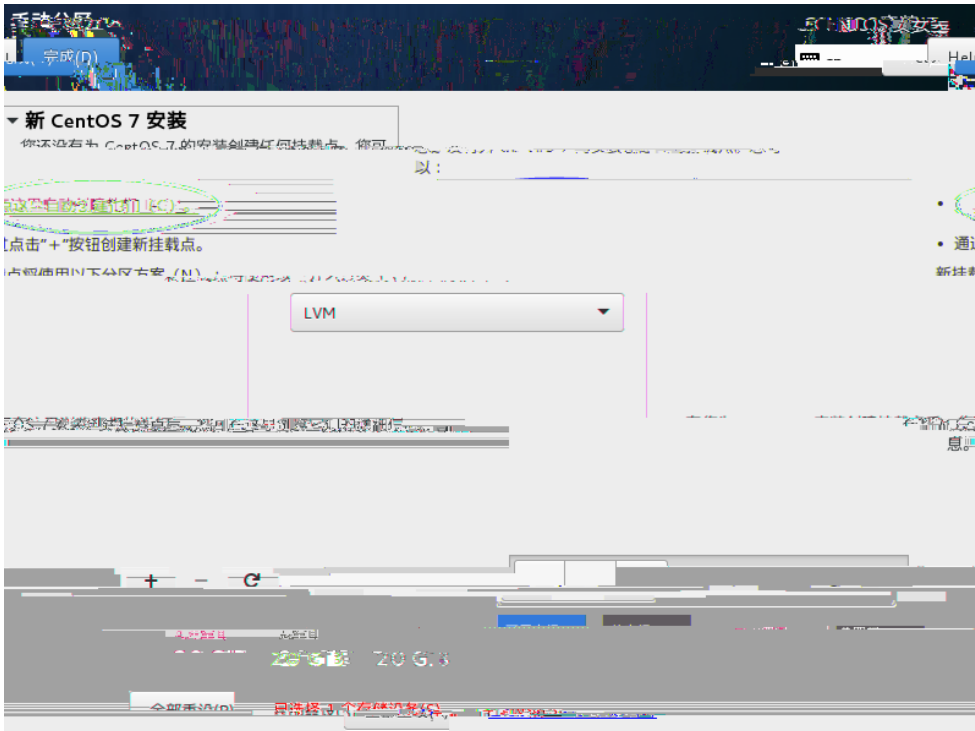

3.1.6 设置 /boot 分区大小为 500M

— 设置 /boot 分区大小为 500M


图 3-9 为 /boot 分区 500M

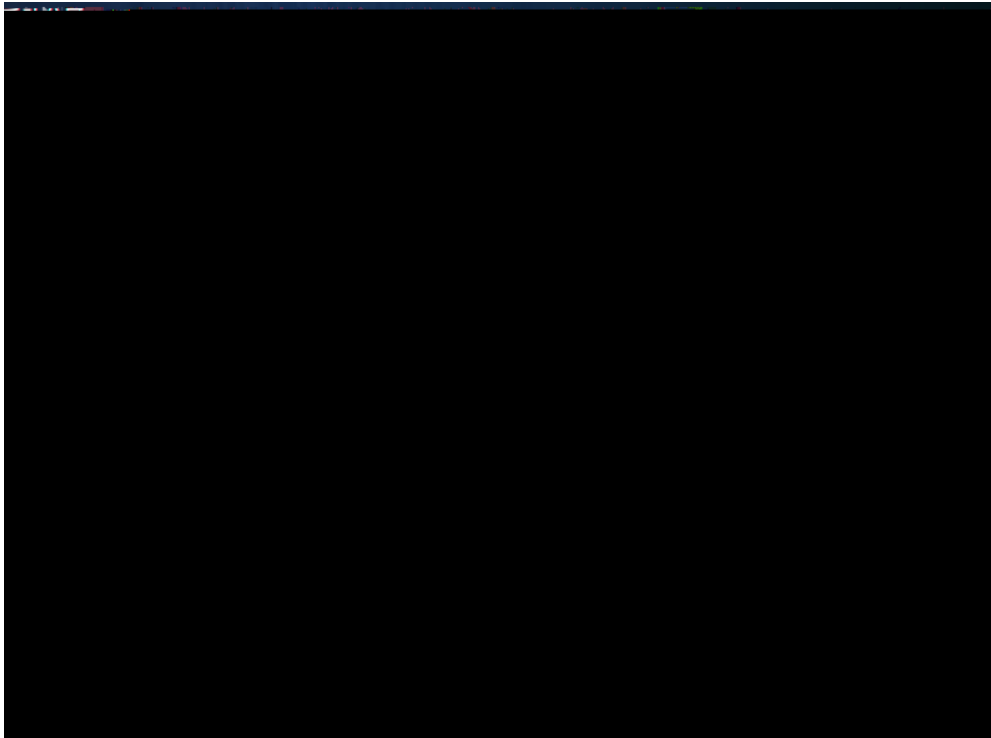

3.1.7 为根分区 / 设置 100GB

图 3-10 为根分区 / 设置 100GB

图 3-10 为根分区 / 设置 100GB

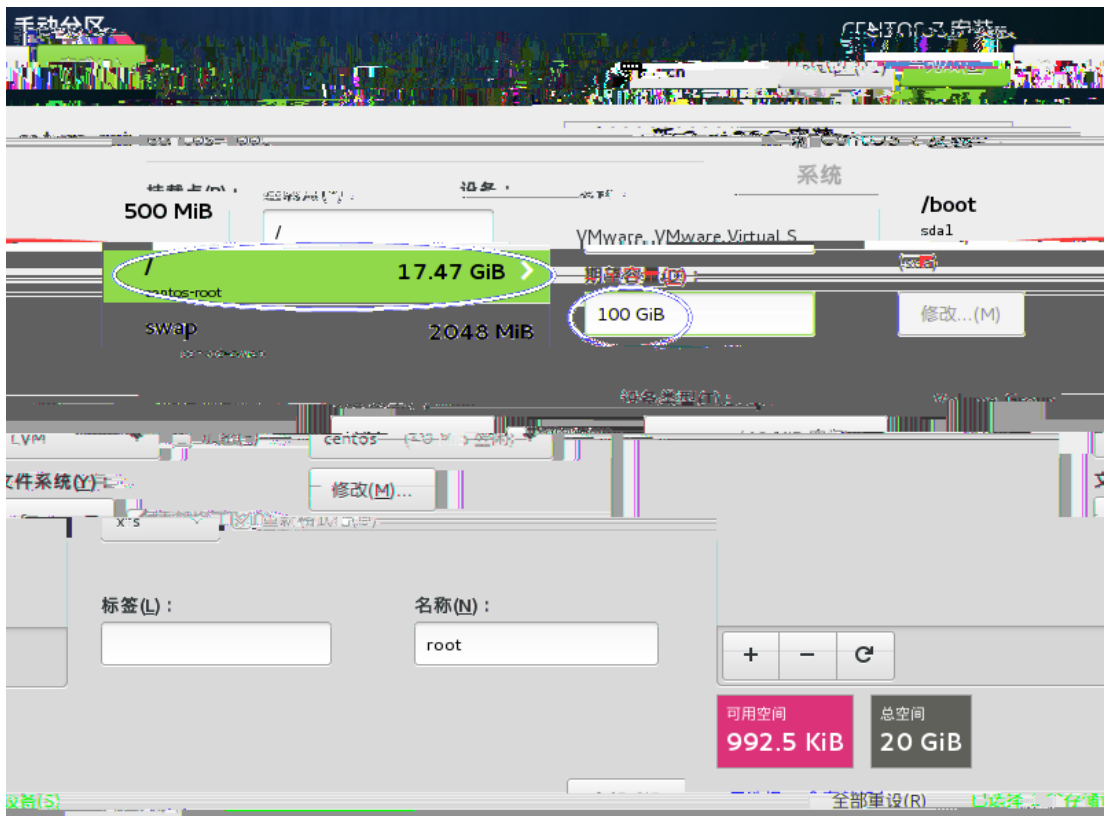


3.1.8 UTF-8 a UTF-16

UTF-8 a UTF-16 – dva typy kódování

UTF-8 a UTF-16


图 3-12 手动分区

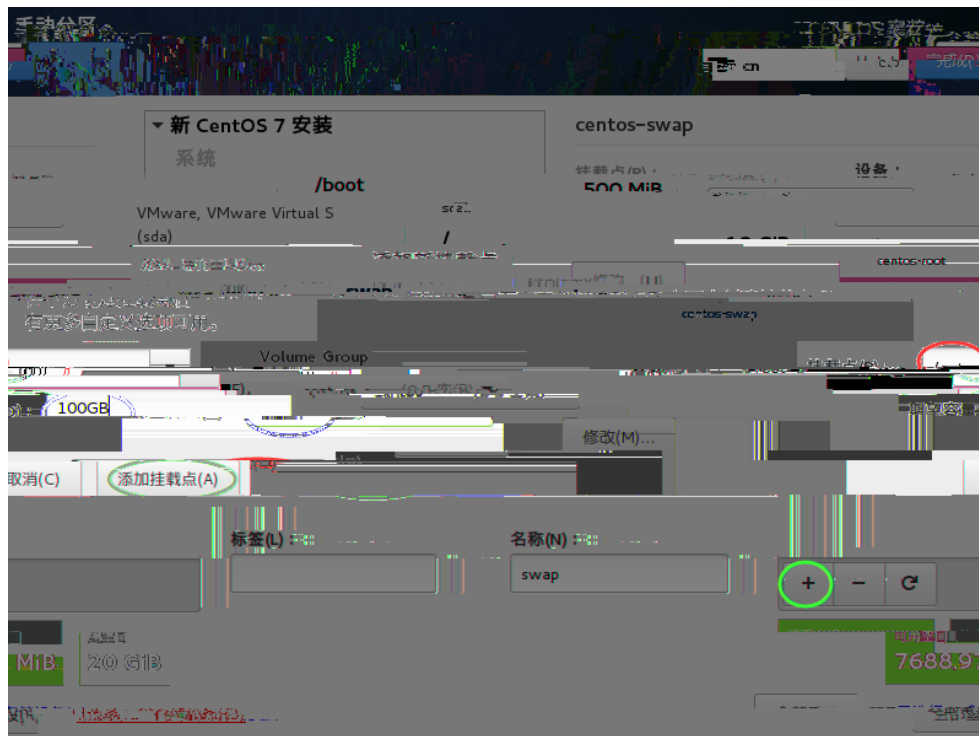

3.1.10 安装完成

安装完成后，系统会自动重启。重启后，系统会自动安装完成。

图 3-13 安装完成




3.1.11 安装摘要

安装摘要窗口显示了当前安装配置的关键信息。

图 3-14 安装摘要窗口




图 3-15 网络配置窗口



3.1.12 U 7 • ö G

› ñ x ¼ µ k µ à < * > ö ž

¢ 3-16 • ö G

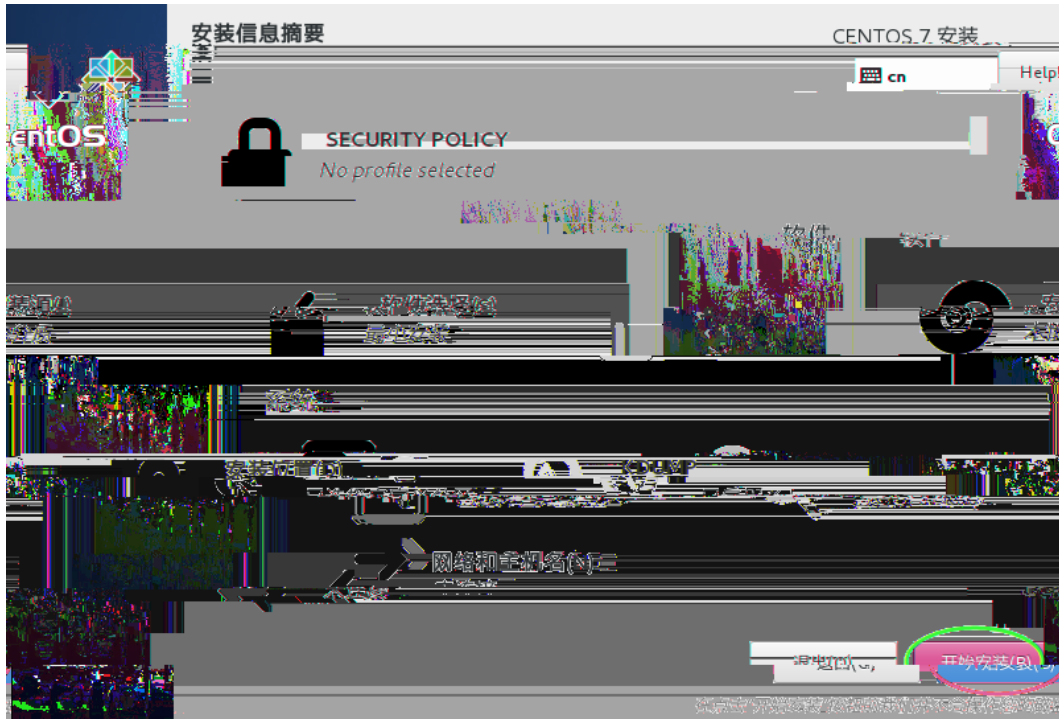


3.1.13 U f' root \$

ˆ x i k U Y — å root % A ö ž

3-17 f' root \$



3-18 Î' root Ð Ð \$

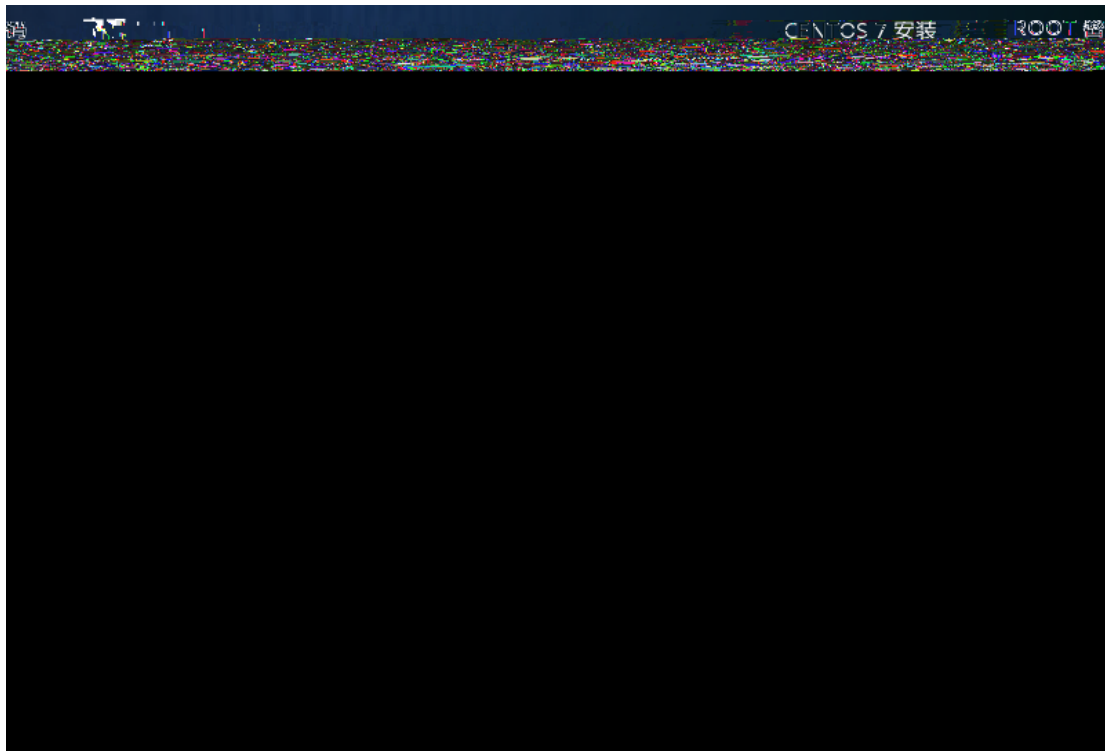

3.1.14 U™ G É n

x è k µ à Moož

¢ 3-19 G É

3.1.15 U ; æ ¢

Moe k ß è ò £ µ k ĩ d ÿ µ root k % AÜ¿9ñ P ĩñ gRAÿ @~5 q ^f[à — á G É

3.1.16 U , 'X•N o~ Lo-

"wÆ ~ž•ož àŠ£d%• g J ò xX gq•y

- (1)    c5o07E  y date -Rož
- (2) 3    y date -s '2016-09-08 10:52:58' k ě • — ě ù ž • © y 2016-09-08 10:52:58z  BIOSkxX©y hwclock -w

4 RG-eLog G

4.1 m G g]


 B*D

- 3 1 @
- /opt >
- SecureCRT  SecureFX 

4.1.1 U%• Ž H ä /

- (1) o SecureCRT   -> ě ĩ "172.29.4.101"  IP ĩ -> ě ĩ
 ĩ "root"->\$ ĩ x  root%A kě 4-1o•4-2o•4-3y

ě 4-1 ä /š —

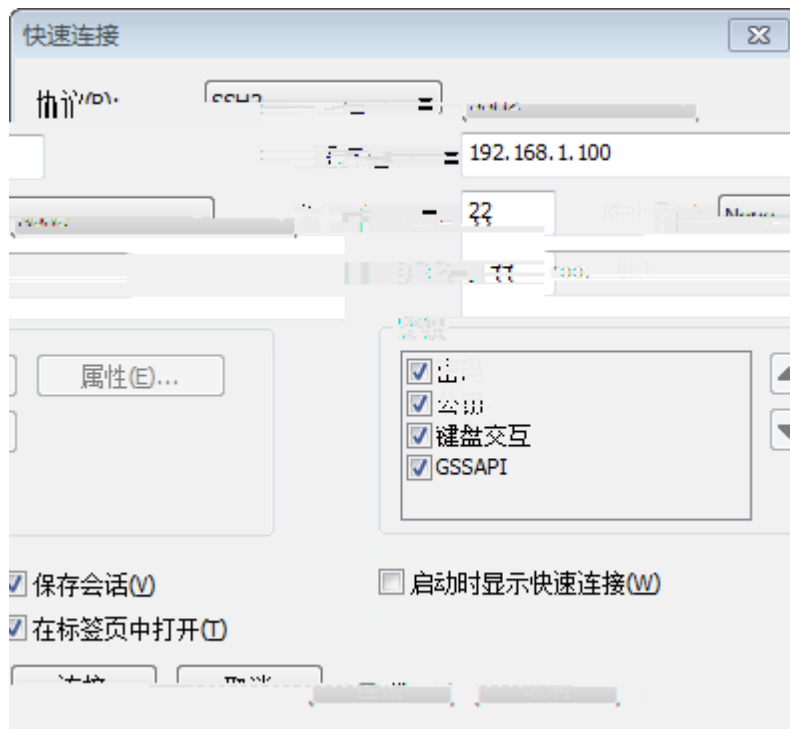

4.2.1 U%• Ü⁻ md5 š

ñ.

a_ [3 E ME] 0 2.]@ 0.01.11 _

041 3 7a. a5 _551 2 21_4 2_ 1a7 E ME] 0 2.]@ 0.01.11 _

4.2.2 U 7 U 8

g í î d Y ž Ů ã h

ü g x X e k eLog©İ yö * ož

xèkø ³[INFO] G —¹ ´k0ñ OϕõnP x RG-eLog xè z xè ekÆ U
Q"o k¬}^-ÙãUkÀ} žx Æ ~ Ñ~FâÂ ,¼ ož

ò ß ³[ERROR] ´j" 'îknP x ì è k ¬ÿG µ™°UPk" ñ=æw†Đek3ú RG-
eLogeÇ M• xož

¢ 4-5 G Ú 8

x Ø e kxX firewall-cmd --list-ports 0ÄV kM+QOP

OL	"	yf
80	TCP	©M
8080	TCP	HTTP M g ßN h
20021	TCP	HTTP M g ßN h
8070	TCP	Agent Æ ² M
443	TCP	©M
514	UDP	Syslog M
23101	UDP	+N† ACo•APgð
23102	TCP	+N† ACo•APgð

(2) ~~FE~~ IP0ž


(3) ~~BE~~ 4-6y

¢ 4-6 æ ¢ Û „

4.3.2 ' X ë ö \$


Ù) £

图 4-10 导入License

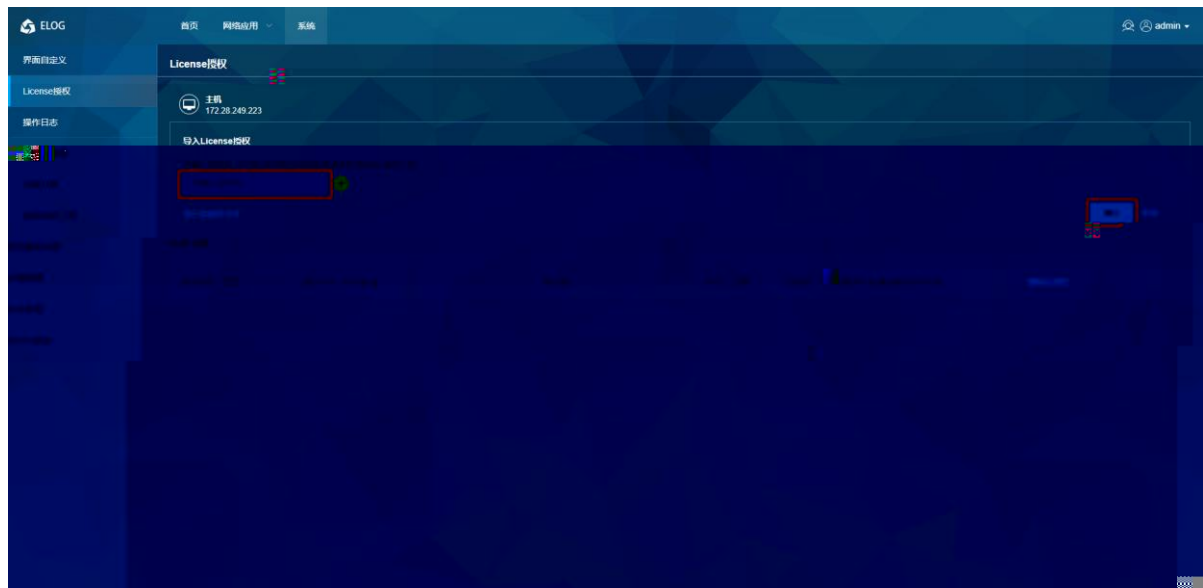


(6) 单击“导入License”按钮，弹出“导入License”对话框，选择要导入的License文件，单击“确定”按钮，完成License的导入。

图 4-11 导出License

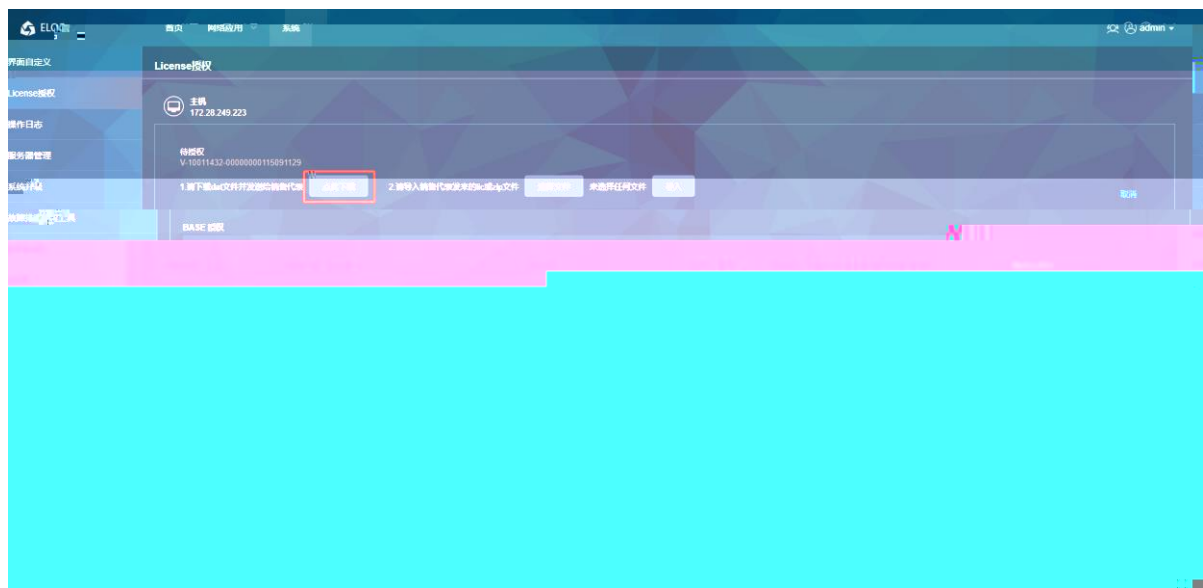


(7) 单击“导出License”按钮，弹出“导出License”对话框，选择要导出的License文件，单击“确定”按钮，完成License的导出。

¢ 4-12 ,´ lic g]

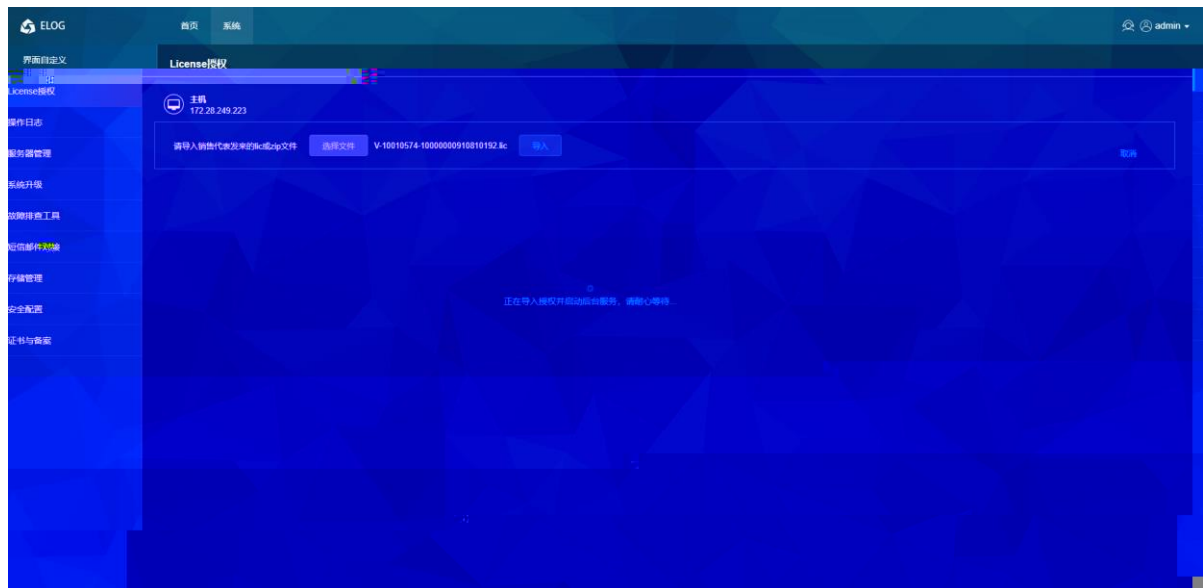

(8) 6kPž


¢ 4-13 *´ d é Û „

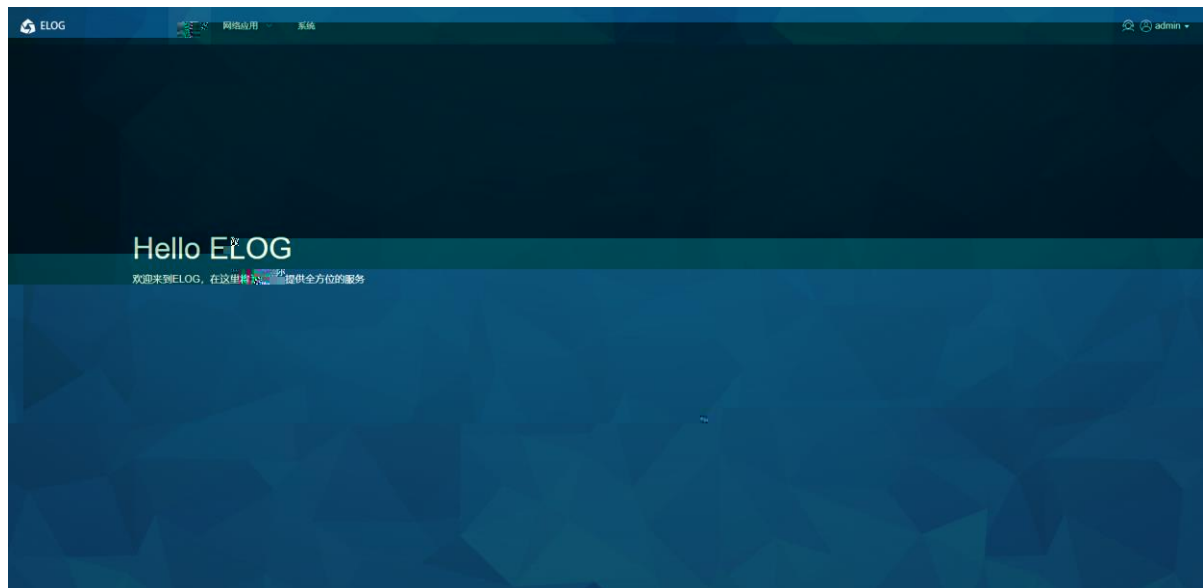

4.3.4 ¾ T ´

À } F å q • ¬ @ ð o ! ï ô Æ o š o ž

5 RG-eLog 2 É



J i £WÀY rooti SSH£ eLogŹE kU@đ 4.1.1 %5 yN oŽ

 $\mu_{opt}(\mathbf{x})$

```
(2) gxxY      sh uninstall.sh
```

```
[root@yqtEIU0c ~]# cd /opt/inap/
[root@yqtEIU0c inap]# sh uninstall.sh
```

```
z 0 /opt/inap)Ek ] "
```

z g̃xX docker pskGxX ©kq

4

z " /opt/inap)£

z g docker psXxe q

 B*D

- 1 3 4 1 3
 ● 3 M @ 51